REV	CONTENT	CHK	DATE
V0.0	CONTENT	LZW	23.10.12

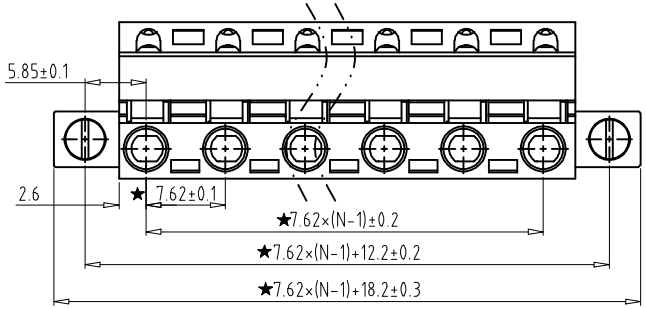

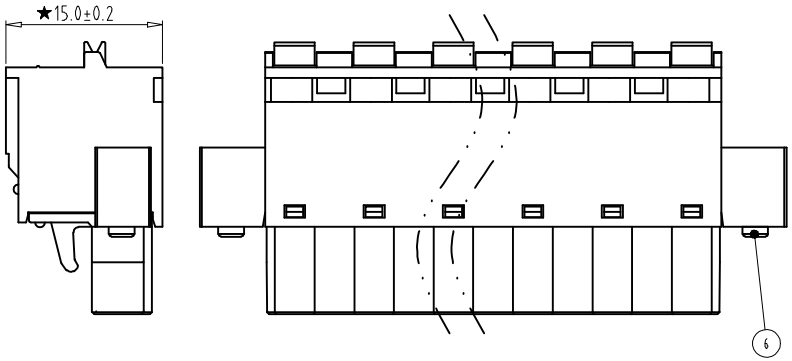



SECTION A-A



Electrical :

	UL	IEC
1.Rated Voltage :	300V	400V
2.Rated Current :	10A	20A
3.Wire Range:	28-12AWG	0.2-2.5mm²

4.Stripping Length : 7-8mm
5.Withstanding Voltage : AC1600V/1Min
6.Operating Temperature : -40°C~+105°C
7.RoHS Compliance
8."★" is the key quality control point

2EGTKDM - 7.62 - XXP - X X - 00

① ② ③ ④ ⑤ ⑥

① Sereies NO.

② Pitch

③ Poles
- 02 02Contacts
- 03 03Contacts
- ...
- 24 24Contacts

④ 1 Single Pitch
2 Double Pitch

⑤ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White

⑥ Customer Request: 00– Standard

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
6	SCREW	XX	2	STEEL	Zn Plated
5	SPRING	XX	N	Stainless Steel	--
4	CLAMP	XX	N	COPPER ALLOY	Ni Plated
3	BUTTON	XX	N	POM UL94HB	SEE NOTE
2	COVER	XX	1	PA66 UL94V-0	SEE NOTE
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE

DWG.	LZW	DATE	23.10.12	SIZE	A4	UNITS	mm
CHK.		DATE		SCALE	1:1	SHEET/OF	1 / 1
APP.		DATE					

Golten 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.

NAME: 2EGTKDM-7.62-XXP-XX-00

DWGNO. XXXX

Total Pitch Tolerances in mm									Nominal dimension range in mm									⊥		⌭	—		//
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 350 to 500	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10	all	over 0 to 100	over 100 to 150	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5