


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		增加UL刻字, 并修改结构	YeJ	07/15/06	
△		增加VDE刻字及参数	ZengY	08/24/06	

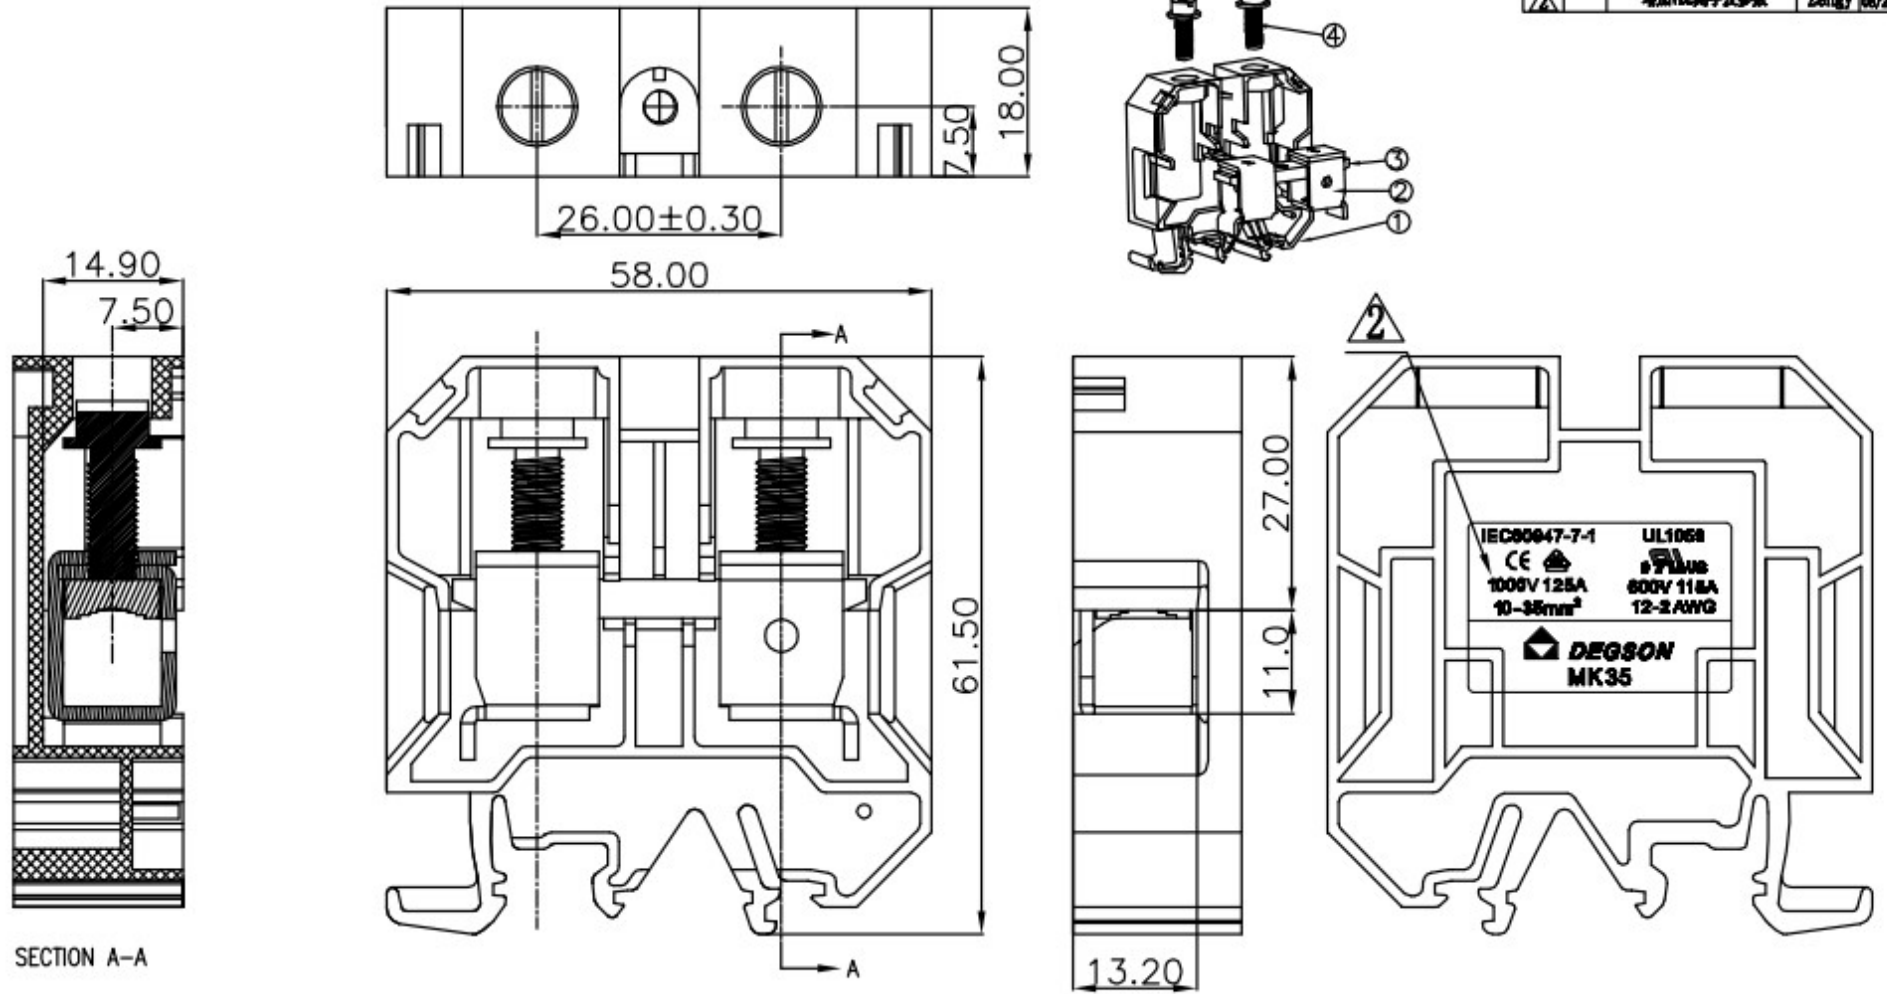

SECTION A-A

Notes:

- Rated voltage/current:UL 600V/115A
VDE 1000V/125A
- Operation temperatures:-40° C - +105° C
- Insulation Withstand Voltage:AC3000V/1Min
- Insulation Resistance:5000MΩ/DC1000V
- Wire Range:12-2AWG , 10-35mm²
- Max. Torque Value:M6.0 , 25.5kgf.cm
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					
to	over	to	over	to	over	to	
6	8	10	30	60	100	150	()
6	10	24	30	60	100	150	□
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0/0.05/0

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
4	MK35 Screw	S000002030 (H)	2	Steel	Cr ³⁺ Zn
3	MK35-Current carrier	6043B00010 (H)	1	Brass	Ni plated
2	MK35 cage	X000001380 (H)	2	Iron	Cr ³⁺ Zn

1	MK35 Housing	6043A2801A (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
← MM (INCH) → DFTD Zh/mm DATE 01/04/07 CHKD DATE MFD DATE APPAL DATE MATERIAL : G.E : FINISH : SCALE : 1:1		宁波高正电子有限公司 DEGSON [®] DEGSON ELECTRONICS CO., LTD NAME MK35-01P-1X-01A (H) DRAWING NO. MK35-E02 SIZE A3 REV T2 /PART NO. 08/24/06 DO NOT SCALE DRAWING SHEET 1 OF 1			
DETACHED LISTS ANGLES ± 1' THIRD ANGLE PROJECTION					