
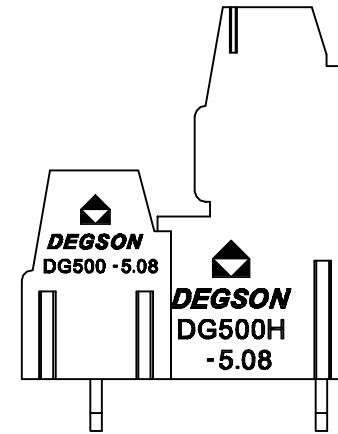
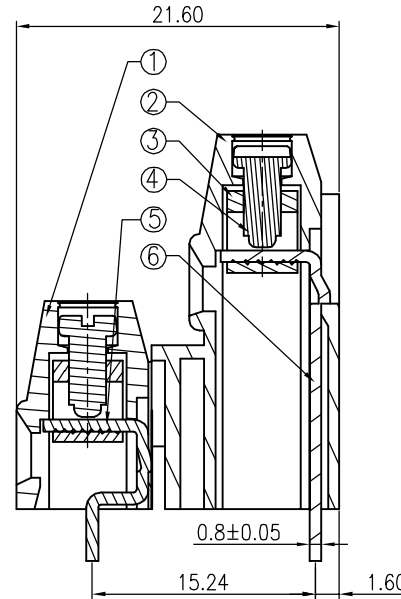


REVISION RECORD					
REV	ECN	DESCRIPTION	DRFT	DATE	
△		Drawing Revise	Haoyh	03/08/08	
△		修改线数: 改为每个焊脚代表一线	LJH	03/22/08	
△	10-0363	修改技术参数	ZXX	10/28/10	

- Notes:
- Pitch: 5.08mm, ploes: XXP
 - Rated voltage/current: UL 300V/15A △
VDE 250V/24A
 - Operation temperatures: -40° C ~ +105° C
 - Insulation Withstand Voltage: AC2000V/1Min
 - Insulation Resistance: 5000MΩ/DC1000V
 - Wire Range: 24~12AWG, 2.5mm²
 - Max. Torque Value: M2.5, 4.08kgf.cm
 - Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						—
to	over	over	over	over	over	over	∩	
6	6 to 10	10 to 24	30 to 60	60 to 100	100 to 150	150	∇	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	
							0.05/10	

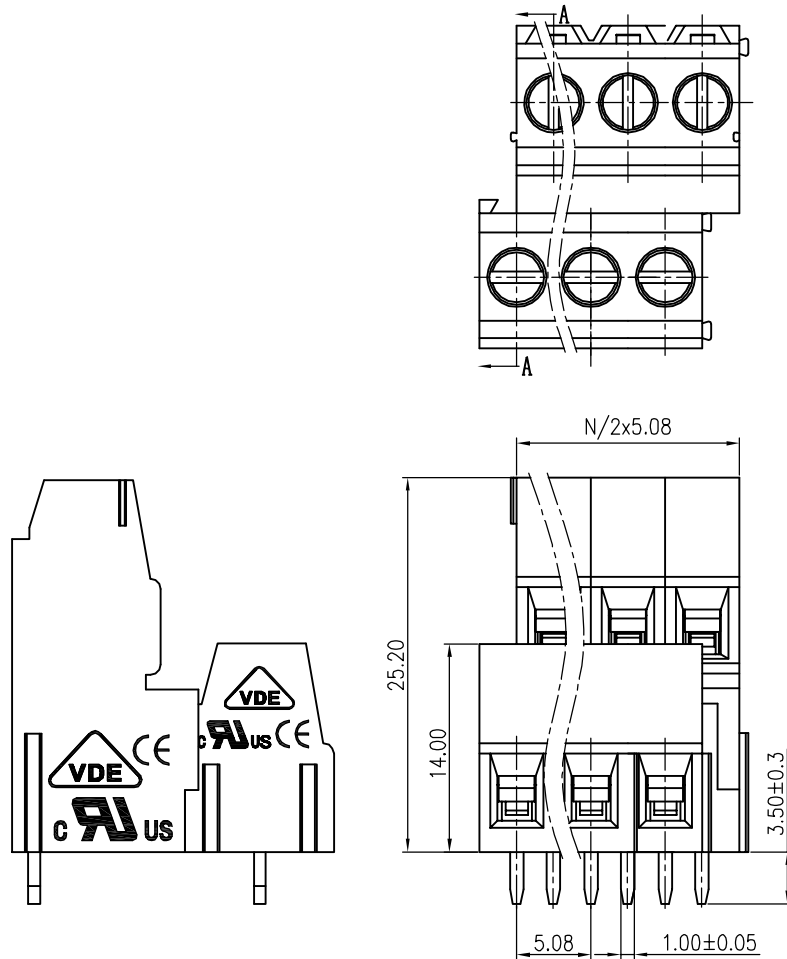

6	DG500H-Pin header	4038B00010 (H)	△	XX/2	Barss	SnCe
5	DG128-Pin header	4027B00010 (H)	△	XX/2	Barss	SnCe
4	DG128"-Screw	S000001460 (H)	△	XX	Steel	Cr ³⁺ Zn
3	DG128 Brass Cage	X000000020 (H)	△	XX	Brass	Ni plated
2	DG500H-5.08-Housing	4038A0Y (XX/2) A (H)	△	1	PA66	UL94V-0

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	DG500-5.08-Housing	4036A0Y (XX/2) A (H)	1	PA66	UL94V-0

(MM) (INCH) TOLERANCES EXCEPT AS NOTED	DFTO longxc CHKD MFO APPVL	DATE 03/25/04" DATE DATE DATE	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG500B-5.08-XXP-1Y-00A(H) DRAWING NO. DG500B-5.08-E01 /PART NO. DO NOT SCALE DRAWING
MM .0 ± .00 ± .000 ±	± ± ±	MATERIAL : G.E : FINISH : SCALE : 1:1	
ANGLES ± 1° THIRD ANGLE PROJECTION			