

25x25x10 mm

KF0210-02 Series

- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 15\%$





SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Power (Watt)	Noise (dBA)	Weight (g)
KF0210B5HR	B	5	4.25~5.75	2.57	0.288	13000	0.20	1.00	1.0	27.40	7
KF0210B5MR				1.96	0.176	10000	0.13	0.65	0.8	22.40	
KF0210B5LR				1.29	0.090	7000	0.10	0.50	0.5	14.80	
KF0210S5HR	S			2.57	0.288	13000	0.22	1.10	1.1	27.40	
KF0210S5MR				1.96	0.176	10000	0.18	0.90	1.0	22.40	
KF0210S5LR				1.29	0.090	7000	0.12	0.60	0.7	14.80	
KF0210B1HR	B	12	10.2~13.8	2.57	0.288	13000	0.09	1.08	1.6	27.40	
KF0210B1MR				1.96	0.176	10000	0.066	0.80	0.8	22.40	
KF0210B1LR				1.29	0.090	7000	0.058	0.70	0.7	14.80	
KF0210S1HR	S			2.57	0.288	13000	0.12	1.44	1.5	27.40	
KF0210S1MR				1.96	0.176	10000	0.10	1.20	1.3	22.40	
KF0210S1LR				1.29	0.090	7000	0.08	0.96	1.2	14.80	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page “PART NUMBER SYSTEM”.
Please contact us for detail if your request bearing system is not shown in the above list.

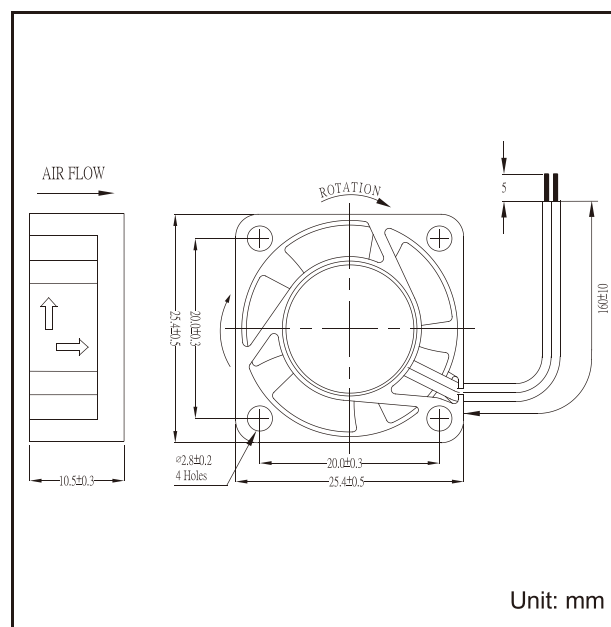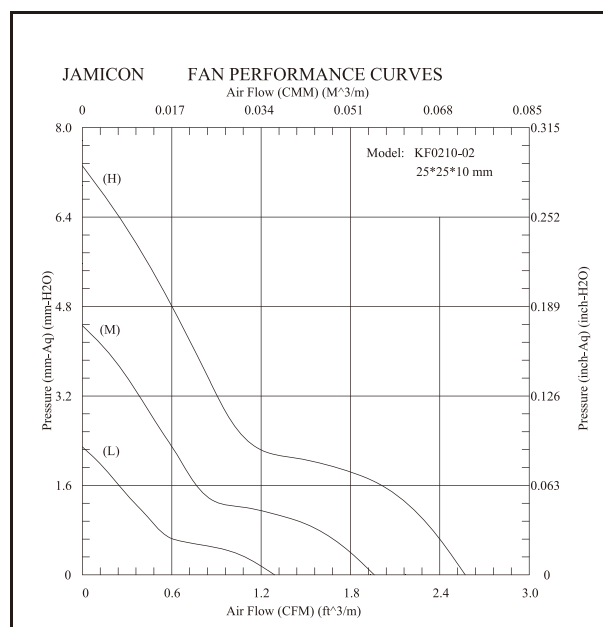

30X30X10 mm

KF0310-01 Series





- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 15\%$

SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Power (Watt)	Noise (dBA)	Weight (g)
KF0310B5HR	B	5	4.25~5.75	3.93	0.212	10000	0.20	1.00	1.0	31.6	8.5
KF0310B5MR				3.34	0.155	8500	0.16	0.80	0.9	27.4	
KF0310B5LR				2.35	0.080	6000	0.08	0.40	0.5	20.1	
KF0310S5HR	S			3.93	0.212	10000	0.20	1.00	1.1	31.6	
KF0310S5MR				3.34	0.155	8500	0.16	0.80	1.0	27.4	
KF0310S5LR				2.35	0.080	6000	0.09	0.40	0.6	20.1	
KF0310B1HR	B	12	10.2~13.8	3.93	0.212	10000	0.11	1.32	1.4	31.6	
KF0310B1MR				3.34	0.155	8500	0.08	0.96	1.3	27.4	
KF0310B1LR				2.35	0.080	6000	0.058	0.70	0.7	20.1	
KF0310S1HR	S			3.93	0.212	10000	0.09	1.08	1.5	31.6	
KF0310S1MR				3.34	0.155	8500	0.06	0.72	1.3	27.4	
KF0310S1LR				2.35	0.080	6000	0.04	0.48	0.7	20.1	

Specifications subject to change without notice


The 7TH character of Model No means the bearing code. Please refer to the page “PART NUMBER SYSTEM”. Please contact us for detail if your request bearing system is not shown in the above list.

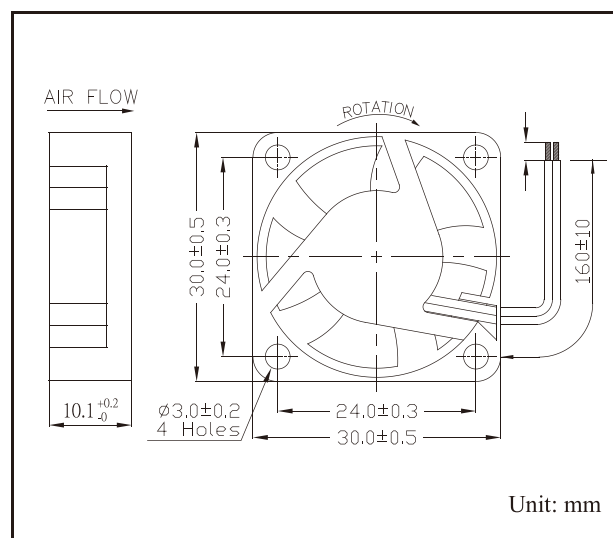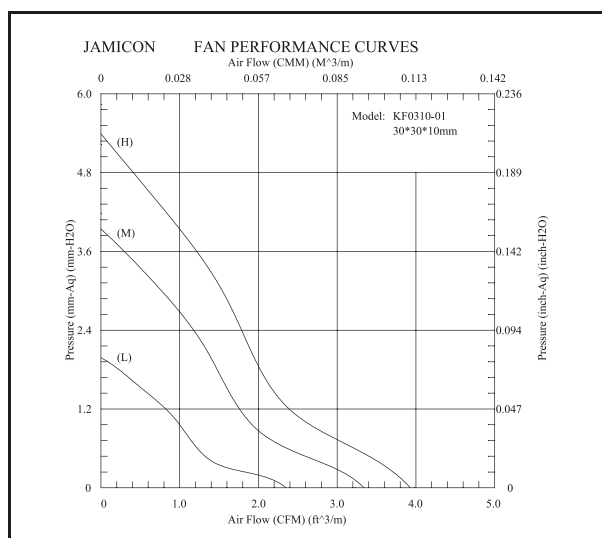

35X35X10 mm

KF0B10-01 Series

- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 15\%$





SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Power (Watt)	Noise (dBA)	Weight (g)
KF0B10-5SR	B, S	5	4.25 ~ 5.75	7.32	0.159	9500	0.23	1.15	1.2	29.9	8.5
KF0B10-5HR				6.53	0.134	8500	0.21	1.05	1.1	26.3	
KF0B10-5MR				5.78	0.113	7500	0.14	0.70	0.8	24.5	
KF0B10-5LR				4.95	0.087	6500	0.09	0.45	0.5	20.7	
KF0B10-5ER				3.66	0.055	4800	0.07	0.35	0.4	15.0	
KF0B10-1SR		12	10.2 ~ 13.8	7.32	0.159	9500	0.13	1.56	1.7	29.9	
KF0B10-1HR				6.53	0.134	8500	0.10	1.20	1.2	26.3	
KF0B10-1MR				5.78	0.113	7500	0.08	0.96	1.0	24.5	
KF0B10-1LR				4.95	0.087	6500	0.06	0.72	0.8	20.7	
KF0B10-1ER				3.66	0.055	4800	0.05	0.60	0.6	15.0	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".

Please contact us for detail if your request bearing system is not shown in the above list.

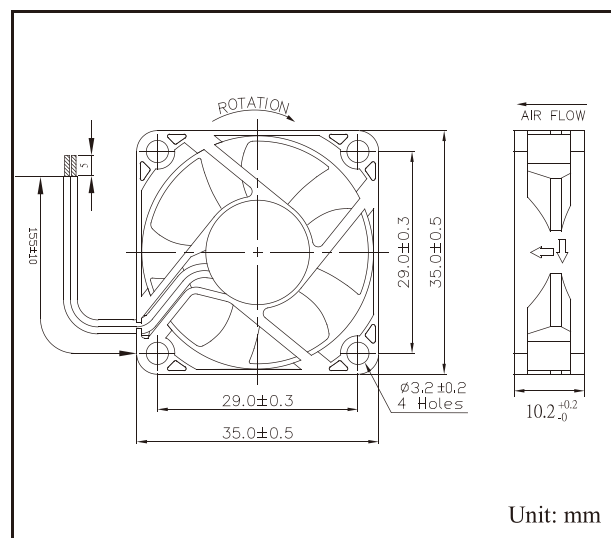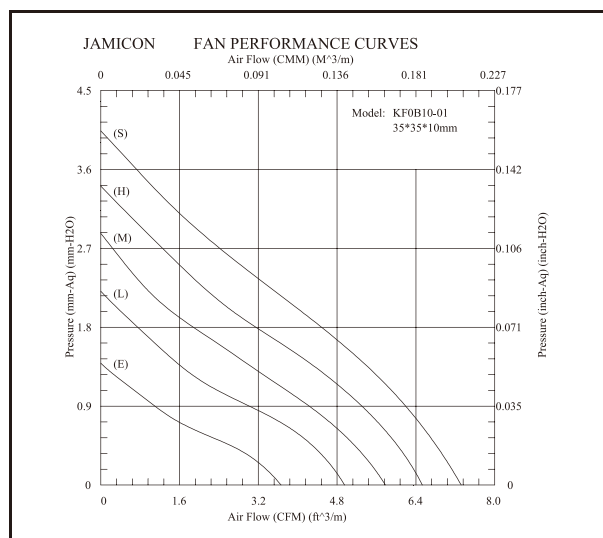

40X40X10 mm

KF0410-01 Series



- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$



SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Power (Watt)	Noise (dBA)	Weight (g)
KF0410B5H-AO	B	5	4.25~5.75	7.55	0.183	7500	0.16	0.80	0.8	33.7	16
KF0410B5H				6.00	0.128	6000	0.13	0.65	0.8	28.0	
KF0410B5M				5.38	0.106	5400	0.09	0.45	0.5	25.7	
KF0410B5L				4.12	0.066	4200	0.07	0.35	0.4	20.9	
KF0410S5H	S			6.00	0.128	6000	0.20	1.00	1.2	28.0	
KF0410S5M				5.38	0.106	5400	0.10	0.50	0.8	25.7	
KF0410S5L				4.12	0.066	4200	0.08	0.40	0.6	20.9	
KF0410B1H-AO	B			12	10.2~13.8	7.55	0.183	7500	0.066	0.80	
KF0410B1H		6.00	0.128			6000	0.066	0.80	0.8	28.0	
KF0410B1M		5.38	0.106			5400	0.058	0.70	0.7	25.7	
KF0410B1L		4.12	0.066			4200	0.05	0.60	0.6	20.9	
KF0410S1H	S	6.00	0.128			6000	0.08	0.96	1.2	28.0	
KF0410S1M		5.38	0.106			5400	0.066	0.80	0.8	25.7	
KF0410S1L		4.12	0.066			4200	0.058	0.70	0.7	20.9	
KF0410B2S-AI	B	24	20.4~27.6			7.55	0.183	7500	0.058	1.40	
KF0410B2S				6.58	0.148	6600	0.058	1.40	1.4	30.6	
KF0410B2H				6.00	0.128	6000	0.05	1.20	1.2	28.0	
KF0410B2M				5.38	0.106	5400	0.04	0.96	1.0	25.7	
KF0410B2L				4.12	0.066	4200	0.03	0.72	0.8	20.9	
KF0410S2H	S			6.00	0.128	6000	0.05	1.20	1.2	28.0	
KF0410S2M				5.38	0.106	5400	0.04	0.96	1.0	25.7	
KF0410S2L				4.12	0.066	4200	0.03	0.72	0.8	20.9	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".

Please contact us for detail if your request bearing system is not shown in the above list.

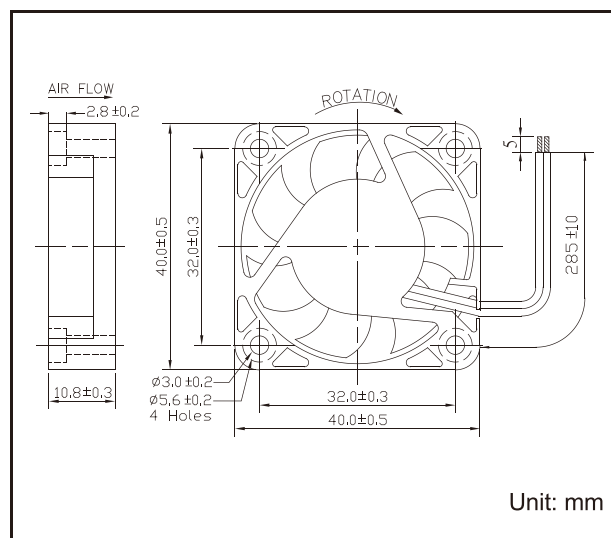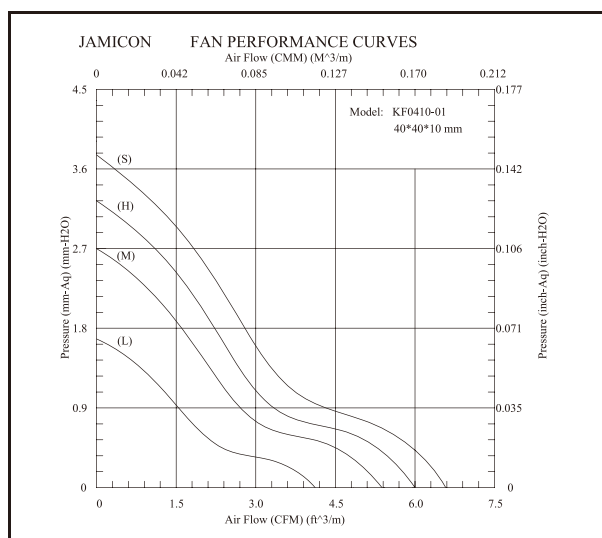

40X40X10 mm

KF0410-03 KF0410-08 Sries



- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$



SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Power (Watt)	Noise (dBA)	Weight (g)
KF0410B5H-AO	B	5	4.25~5.75	8.09	0.187	7500	0.16	0.80	0.8	31.4	16
KF0410B5H				6.42	0.129	6000	0.13	0.65	0.8	26.4	
KF0410B5M				5.75	0.106	5400	0.09	0.45	0.5	24.4	
KF0410B5L				4.37	0.067	4200	0.07	0.35	0.4	19.9	
KF0410S5H	S			6.42	0.129	6000	0.20	1.00	1.2	26.4	
KF0410S5M				5.75	0.106	5400	0.10	0.50	0.8	24.4	
KF0410S5L				4.37	0.067	4200	0.08	0.40	0.6	19.9	
KF0410B1H-AO	B			12	10.2~13.8	8.09	0.187	7500	0.06	0.72	
KF0410B1H		6.42	0.129			6000	0.06	0.80	0.8	26.4	
KF0410B1M-		5.75	0.106			5400	0.058	0.70	0.7	24.4	
KF0410B1L		4.37	0.067			4200	0.05	0.60	0.6	19.9	
KF0410S1H	S	6.42	0.129			6000	0.08	0.96	1.2	26.4	
KF0410S1M		5.75	0.106			5400	0.066	0.80	0.8	24.4	
KF0410S1L		4.37	0.067			4200	0.058	0.70	0.7	19.9	
KF0410B2S-AI	B	24	20.4~27.6			8.09	0.187	7500	0.058	1.40	
KF0410B2S				6.97	0.159	6600	0.05	1.20	1.4	29.3	
KF0410B2H				6.42	0.129	6000	0.05	1.20	1.2	26.4	
KF0410B2M				5.75	0.106	5400	0.04	0.96	1.0	24.4	
KF0410B2L				4.37	0.067	4200	0.03	0.72	0.8	19.9	
KF0410S2H	S			6.42	0.129	6000	0.05	1.20	1.2	26.4	
KF0410S2M				5.75	0.106	5400	0.04	0.96	1.0	24.4	
KF0410S2L				4.37	0.067	4200	0.03	0.72	0.8	19.9	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".

Please contact us for detail if your request bearing system is not shown in the above list.

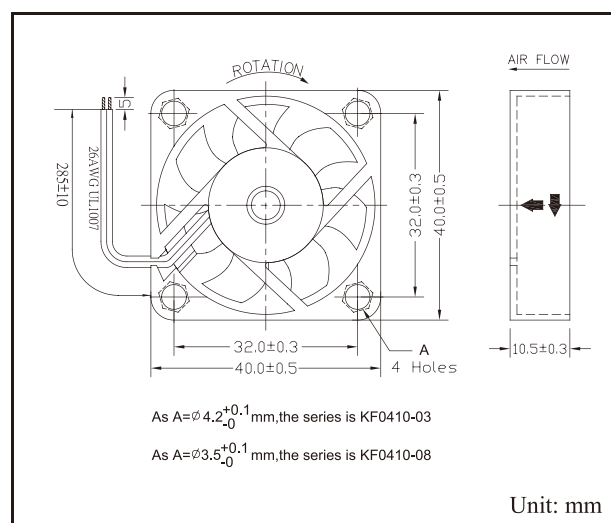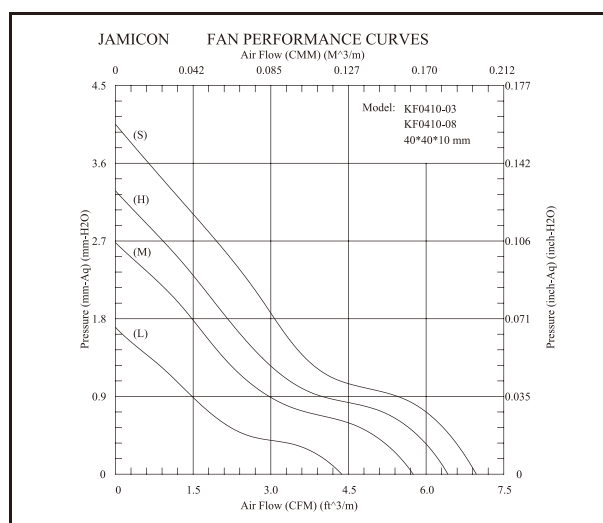

40X40X15 mm

KF0415-11 Series





- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$

SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
KF0415B5SR	B	5	4.25~5.75	10.32	0.325	8600	0.53	2.65	0.70	39.0	25
KF0415B5HR				8.84	0.237	7300	0.32	1.60	0.44	32.9	
KF0415-5M	B, S			7.14	0.159	6000	0.21	1.05	0.25	28.6	
KF0415-5L	B, S			5.70	0.113	5000	0.16	0.80	0.17	24.9	
KF0415B1SRAR	B	12	10.2~13.8	14.94	0.537	12200	0.23	2.76	0.25	53.1	
KF0415B1SR				10.32	0.325	8600	0.19	2.28	0.25	39.0	
KF0415B1HR	8.84			0.237	7300	0.13	1.56	0.17	32.9		
KF0415-1M	B, S			7.14	0.159	6000	0.08	0.96	0.11	28.6	
KF0415-1L	B, S			5.70	0.113	5000	0.06	0.72	0.08	24.9	
KF0415B2SRAN	B	24	20.4~27.6	11.05	0.435	10000	0.09	2.16	0.11	45.6	
KF0415B2SR				10.32	0.325	8600	0.09	2.16	0.11	39.0	
KF0415B2HR	8.84			0.237	7300	0.07	1.68	0.08	32.9		
KF0415-2M	B, S			7.14	0.159	6000	0.05	1.20	0.06	28.6	
KF0415-2L	B, S			5.70	0.113	5000	0.03	0.72	0.04	24.9	


Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".
Please contact us for detail if your request bearing system is not shown in the above list.

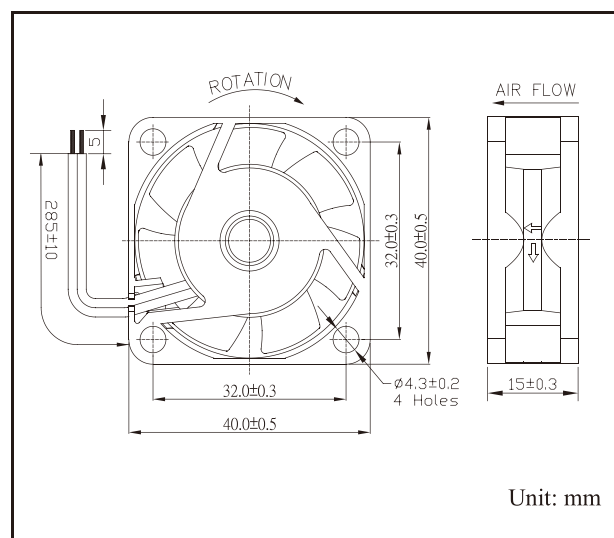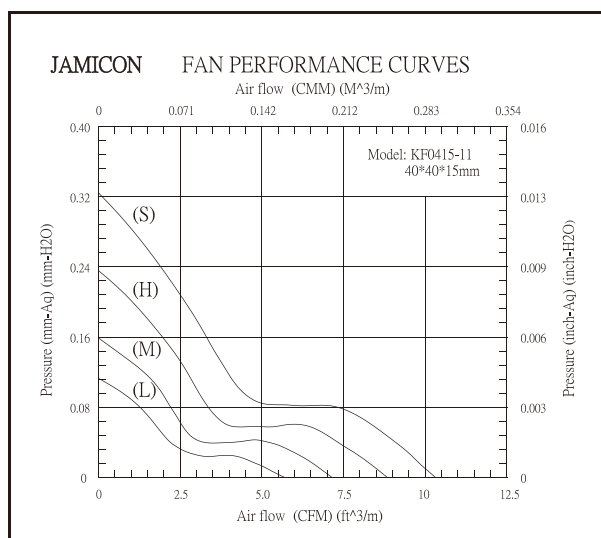

40X40X20 mm

KF0420-01 KF0420-04 Series





- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$

SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Power (Watt)	Noise (dBA)	Weight (g)
KF0420B5H-AJ	B	5	4.25~5.75	10.91	0.386	8500	0.24	1.20	1.3	35.2	25
KF0420-5H	B, S			9.50	0.296	7500	0.23	1.15	1.3	32.6	
KF0420-5M	B, S			7.73	0.204	6200	0.15	0.75	0.8	26.5	
KF0420-5L	B, S			6.24	0.134	5000	0.09	0.45	0.6	22.0	
KF0420B1H-AO	B	12	10.2~13.8	11.62	0.431	9000	0.13	1.56	1.6	36.5	
KF0420B1H-AJ				10.91	0.386	8500	0.13	1.56	1.6	35.2	
KF0420-1H	B, S			9.50	0.296	7500	0.10	1.20	1.6	32.6	
KF0420-1M	B, S			7.73	0.204	6200	0.08	0.96	1.3	26.5	
KF0420-1L	B, S			6.24	0.134	5000	0.06	0.72	0.8	22.0	
KF0420B2S-AE	B	24	20.4~27.6	11.62	0.431	9000	0.10	2.40	2.6	36.5	
KF0420B2S				10.91	0.386	8500	0.09	2.16	2.6	35.2	
KF0420-2H	B, S			9.50	0.296	7500	0.07	1.68	2.0	32.6	
KF0420-2M	B, S			7.73	0.204	6200	0.05	1.20	1.5	26.5	
KF0420-2L	B, S			6.24	0.134	5000	0.04	0.96	1.1	22.0	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".
Please contact us for detail if your request bearing system is not shown in the above list.

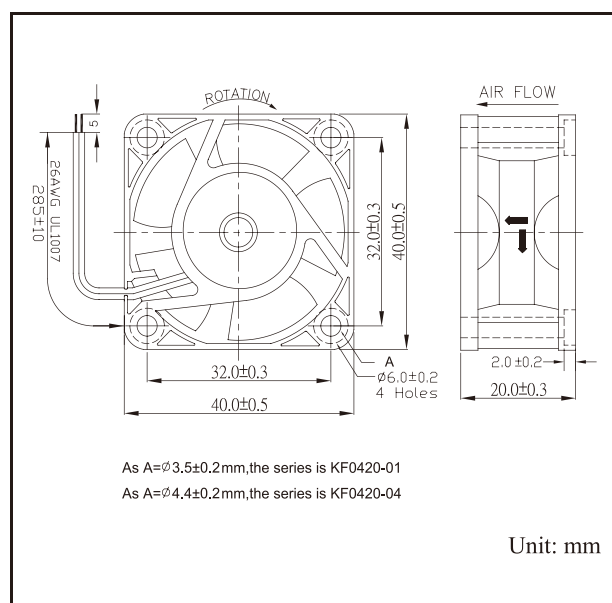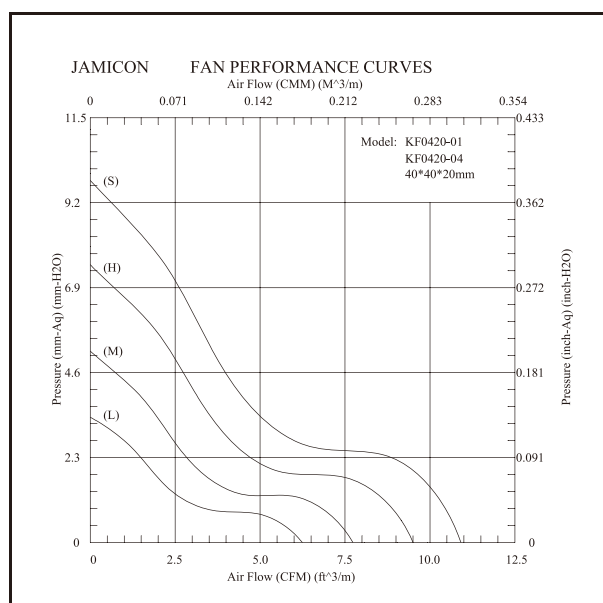

40X40X28 mm

SF0428-11 Series





- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$

SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
SF0428B1TR	B	12	10.2 ~ 13.2	37.50	4.445	27000	2.45	29.4	2.70	67	52
SF0428B1UR				34.66	3.730	25000	1.58	18.96	1.80	65	
SF0428B1SR				31.24	2.980	22000	1.22	14.64	1.50	62	
SF0428B1HR				25.12	1.930	18000	0.64	7.68	0.80	57.5	
SF0428B1MR				19.82	1.260	15000	0.44	5.28	0.60	53.5	


Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".
Please contact us for detail if your request bearing system is not shown in the above list.

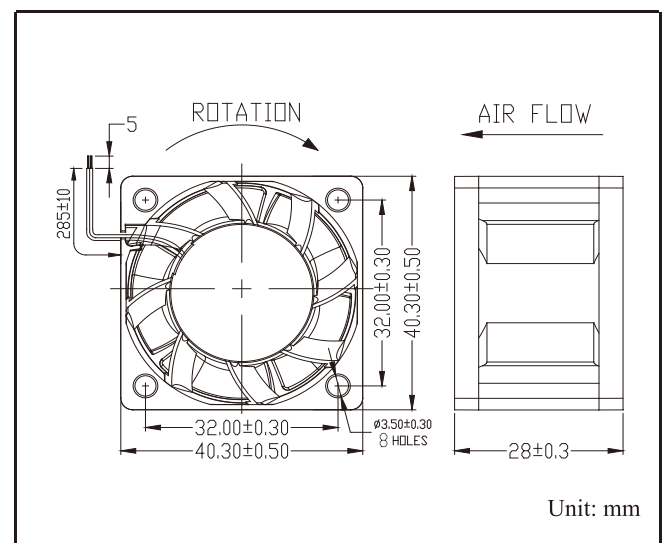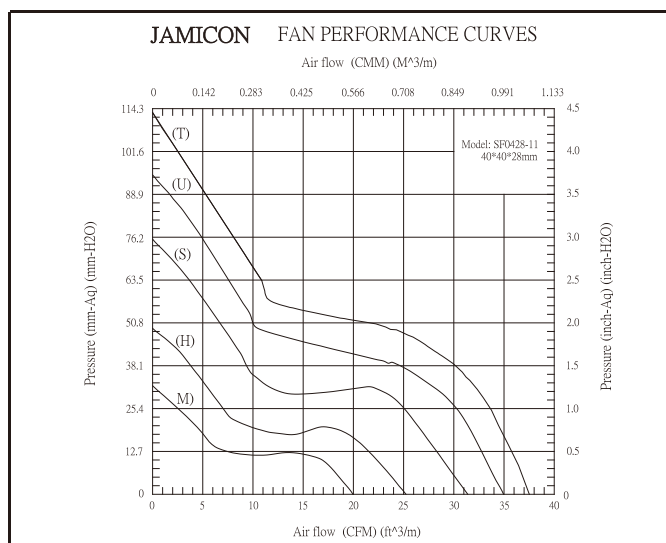

40X40X28 mm

KF0428-12 Series





- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : ±10%

SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
KF0428B1UR	B	12	10.2~13.8	24.34	1.177	14000	0.64	7.68	0.71	54.10	40
KF0428B1SR				22.43	0.980	13000	0.51	6.12	0.61	52.30	
KF0428B1HR				18.55	0.728	11000	0.29	3.48	0.35	46.90	
KF0428B1MR				16.07	0.543	9500	0.20	2.40	0.24	43.70	
KF0428B1LR				13.39	0.395	8000	0.16	1.92	0.19	40.90	
KF0428B1ER				11.49	0.304	7000	0.12	1.44	0.14	34.80	
KF0428B1VR				8.16	0.168	5000	0.06	0.72	0.07	24.90	
KF0428B2LR	B	24	20.4~27.6	13.39	0.395	8000	0.11	2.64	0.13	40.90	
KF0428B2ER				11.49	0.304	7000	0.09	2.16	0.11	34.80	
KF0428B2VR				8.16	0.168	5000	0.05	1.20	0.06	24.90	


Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page “PART NUMBER SYSTEM”.
Please contact us for detail if your request bearing system is not shown in the above list.

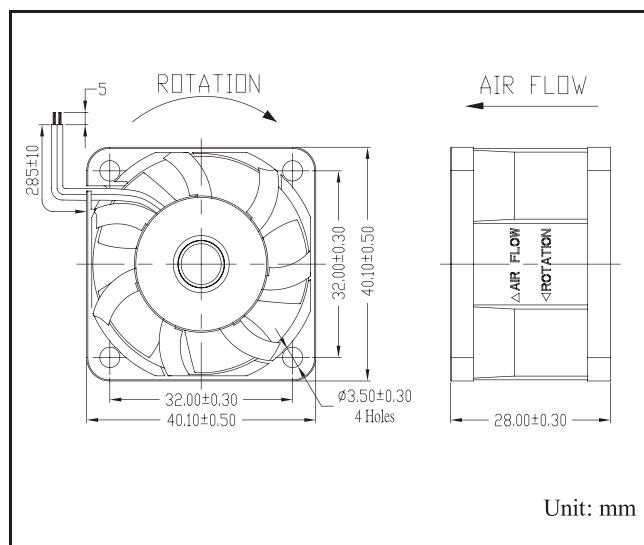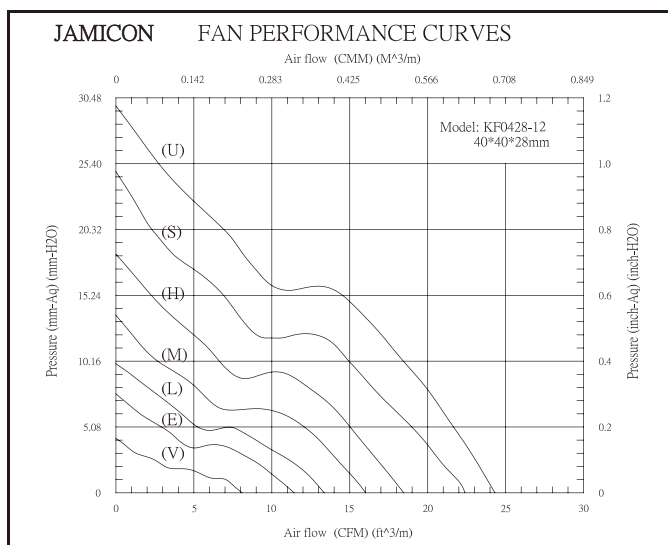

40X40X28 mm

KF0428-11 Series





- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$

SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
KF0428B1UR	B	12	10.2~13.8	24.34	1.177	14000	0.64	7.68	0.71	54.10	40
KF0428B1SR				22.43	0.980	13000	0.51	6.12	0.61	52.30	
KF0428B1HR				18.55	0.728	11000	0.29	3.48	0.35	46.90	
KF0428B1MR				16.07	0.543	9500	0.20	2.40	0.24	43.70	
KF0428B1LR				13.39	0.395	8000	0.16	1.92	0.19	40.90	
KF0428B1ER				11.49	0.304	7000	0.12	1.44	0.14	34.80	
KF0428B1VR				8.16	0.168	5000	0.06	0.72	0.07	24.90	
KF0428B2LR	B	24	20.4~27.6	13.39	0.395	8000	0.11	2.64	0.13	40.90	
KF0428B2ER				11.49	0.304	7000	0.09	2.16	0.11	34.80	
KF0428B2VR				8.16	0.168	5000	0.05	1.20	0.06	24.90	


Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page “PART NUMBER SYSTEM”. Please contact us for detail if your request bearing system is not shown in the above list.

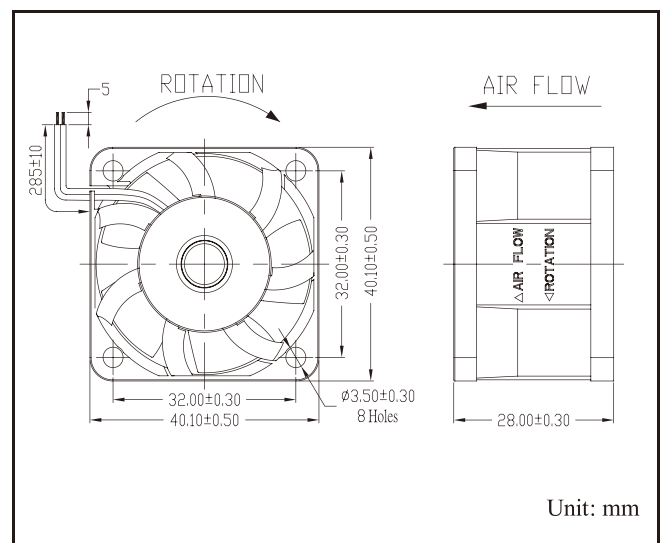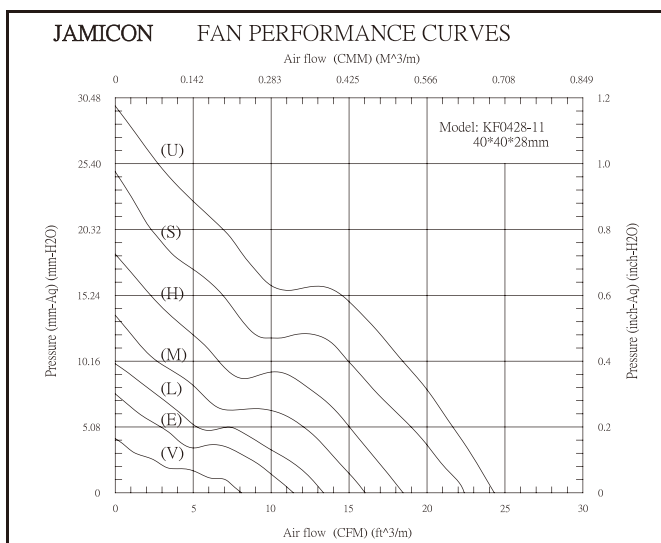

50X50X10 mm

KF0510-01 Series



- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$



SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Power (Watt)	Noise (dBA)	Weight (g)
KF0510B5H	B	5	4.25~5.75	13.04	0.138	5200	0.22	1.10	1.1	29.0	17
KF0510B5M				11.23	0.108	4500	0.14	0.70	0.9	26.2	
KF0510B5L				8.72	0.068	3500	0.09	0.45	0.6	21.2	
KF0510S5H	S			13.04	0.138	5200	0.23	1.15	1.1	29.0	
KF0510S5M				11.23	0.108	4500	0.15	0.75	1.1	26.2	
KF0510S5L				8.72	0.068	3500	0.10	0.50	0.7	21.2	
KF0510B1H-AH	B	12	10.2~13.8	14.70	0.150	6000	0.11	1.32	1.6	32.2	
KF0510B1H				13.04	0.138	5200	0.11	1.32	1.6	29.0	
KF0510B1M				11.23	0.108	4500	0.066	0.80	0.8	26.2	
KF0510B1L				8.72	0.068	3500	0.05	0.60	0.7	21.2	
KF0510S1H	S			13.04	0.138	5200	0.12	1.44	1.9	29.0	
KF0510S1M				11.23	0.108	4500	0.083	1.0	1.0	26.2	
KF0510S1L				8.72	0.068	3500	0.06	0.72	0.8	21.2	
KF0510B2H-AH	B	24	20.4~27.6	14.70	0.150	6000	0.06	1.44	1.7	32.2	
KF0510B2H				13.04	0.138	5200	0.06	1.44	1.7	29.0	
KF0510B2M				11.23	0.108	4500	0.05	1.20	1.5	26.2	
KF0510B2L				8.72	0.068	3500	0.04	0.96	1.3	21.2	
KF0510S2H	S			13.04	0.138	5200	0.06	1.44	1.7	29.0	
KF0510S2M				11.23	0.108	4500	0.05	1.20	1.5	26.2	
KF0510S2L				8.72	0.068	3500	0.04	0.96	1.3	21.2	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".

Please contact us for detail if your request bearing system is not shown in the above list.

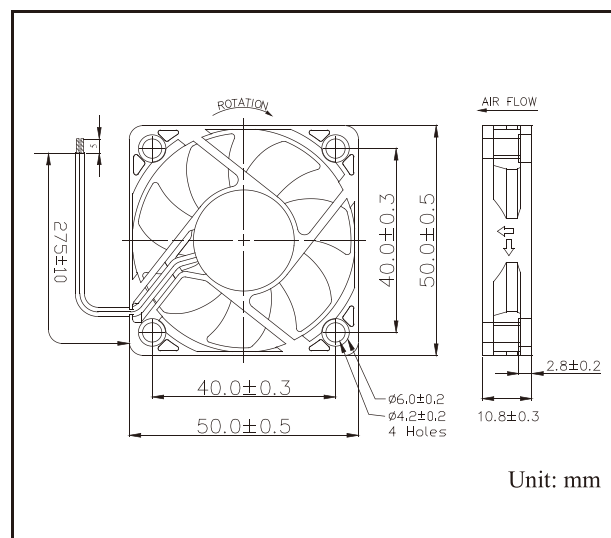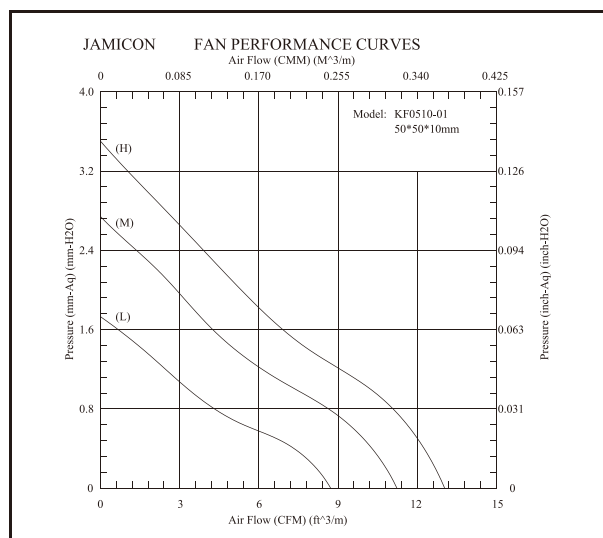

50X50X15 mm

JF0515-01 Series





- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$

SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
JF0515-1HAR	B	12	10.2 ~ 13.8	21.91	0.380	7500	0.20	2.40	0.24	51.2	27
JF0515-1H	B, H, S			16.05	0.208	5500	0.14	1.68	0.24	35.6	
JF0515-1M				14.63	0.171	5000	0.12	1.44	0.22	31.7	
JF0515-1L				13.03	0.139	4500	0.10	1.20	0.16	28.6	
JF0515-1E				11.60	0.108	4000	0.08	0.96	0.12	25.0	
JF0515-2HAR	B	24	20.4 ~ 27.6	21.91	0.380	7500	0.13	3.12	0.13	51.2	
JF0515-2H	B, H, S			16.05	0.208	5500	0.10	2.40	0.13	35.6	
JF0515-2M				14.63	0.171	5000	0.08	1.92	0.12	31.7	
JF0515-2L				13.03	0.139	4500	0.06	1.44	0.11	28.6	
JF0515-2E				11.60	0.108	4000	0.04	0.96	0.08	25.0	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".
Please contact us for detail if your request bearing system is not shown in the above list.

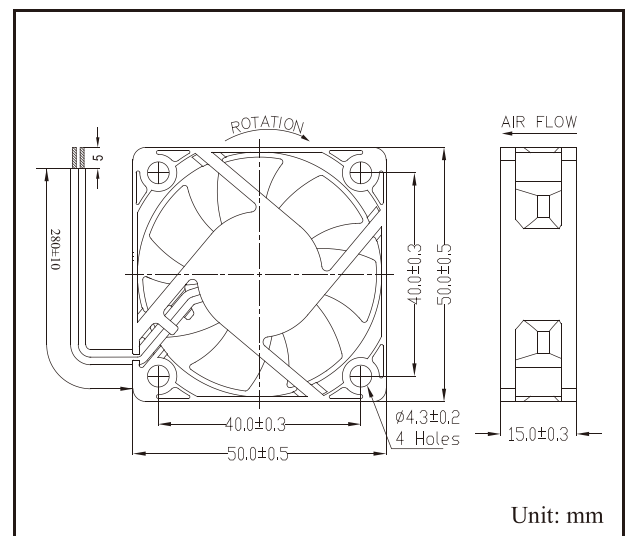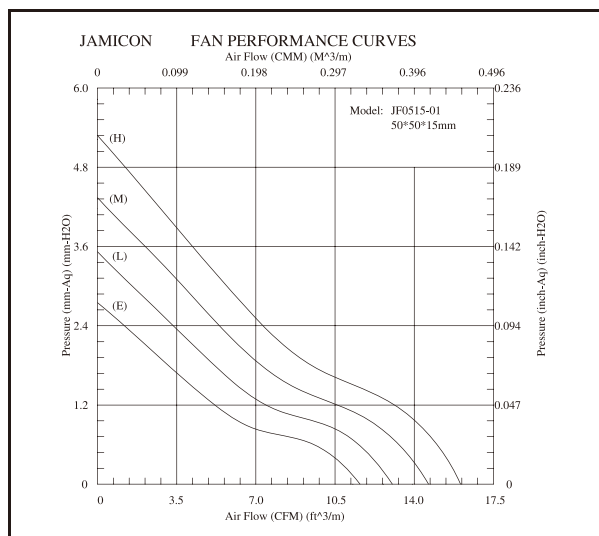

60X60X10 mm

KF0610-01 Series

- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$





SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Power (Watt)	Noise (dBA)	Weight (g)
KF0610-5MR	B, H	5	4.25 ~ 5.75	17.32	0.115	3900	0.38	1.90	2.1	30.8	27
KF0610-5L				15.50	0.094	3500	0.24	1.20	1.3	27.2	
KF0610-5E				13.71	0.075	3100	0.18	0.90	1.0	24.1	
KF0610-5V				11.40	0.054	2600	0.13	0.65	0.8	21.0	
KF0610-HAR	B	12	10.2~13.8	23.33	0.202	5200	0.23	2.76	2.8	39.4	
KF0610-1H	B, H			21.23	0.173	4750	0.23	2.76	2.8	36.0	
KF0610-1M				18.67	0.137	4200	0.16	1.92	2.0	31.9	
KF0610-1L				15.50	0.094	3500	0.13	1.56	1.6	27.2	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".

Please contact us for detail if your request bearing system is not shown in the above list.

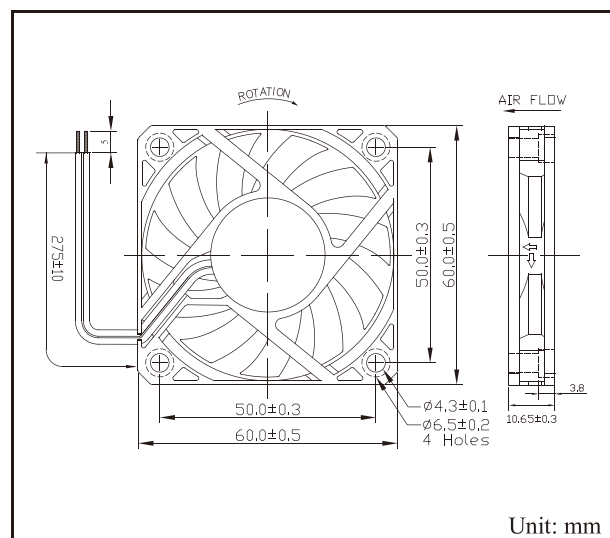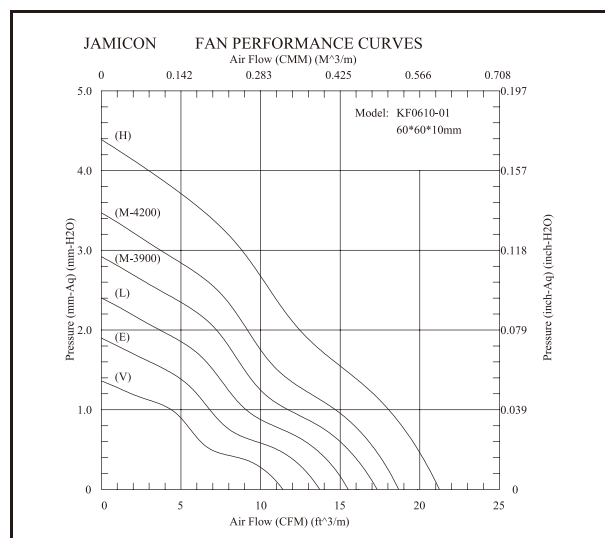

60X60X15 mm

KF0615-01 Series



- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$



SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Power (Watt)	Noise (dBA)	Weight (g)
KF0615-5MR	B, H	5	4.25 ~ 5.75	19.10	0.155	4000	0.42	2.10	2.4	30.0	37
KF0615-5L	B, H, S			16.31	0.116	3500	0.23	1.15	1.3	26.8	
KF0615-5E	B, H, S			13.96	0.087	3000	0.16	0.80	0.9	23.0	
KF0615-5V	B, H, S			11.53	0.062	2500	0.10	0.50	0.6	20.1	
KF0615-1UR	B, H	12	10.2 ~ 13.8	26.20	0.278	5500	0.24	2.88	3.1	38.5	
KF0615-1S				23.67	0.231	5000	0.20	2.40	2.5	36.5	
KF0615-1H	B, H, S			21.40	0.192	4500	0.19	2.28	2.3	33.1	
KF0615-1M	B, H, S			19.10	0.155	4000	0.15	1.80	1.9	30.0	
KF0615-1L	B, H, S			16.31	0.116	3500	0.10	1.20	1.3	26.8	
KF0615-1E	B, H, S			13.96	0.087	3000	0.08	0.96	1.0	23.0	
KF0615-1V	B, H, S			11.53	0.062	2500	0.06	0.72	0.8	20.1	
KF0615-2UR	B, H	24	20.4 ~ 27.6	26.20	0.278	5500	0.18	4.32	4.6	38.5	
KF0615-2S				23.67	0.231	5000	0.15	3.60	3.7	36.5	
KF0615-2H	B, H, S			21.40	0.192	4500	0.12	2.88	3.0	33.1	
KF0615-2M	B, H, S			19.10	0.155	4000	0.09	2.16	2.3	30.0	
KF0615-2L	B, H, S			16.31	0.116	3500	0.07	1.68	1.7	26.8	
KF0615-2E	B, H, S			13.96	0.087	3000	0.05	1.20	1.4	23.0	
KF0615-2V	B, H, S			11.53	0.062	2500	0.04	0.96	1.2	20.1	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".

Please contact us for detail if your request bearing system is not shown in the above list.

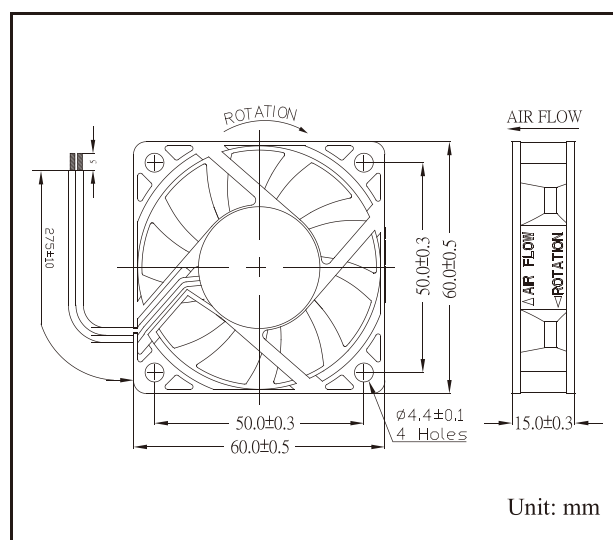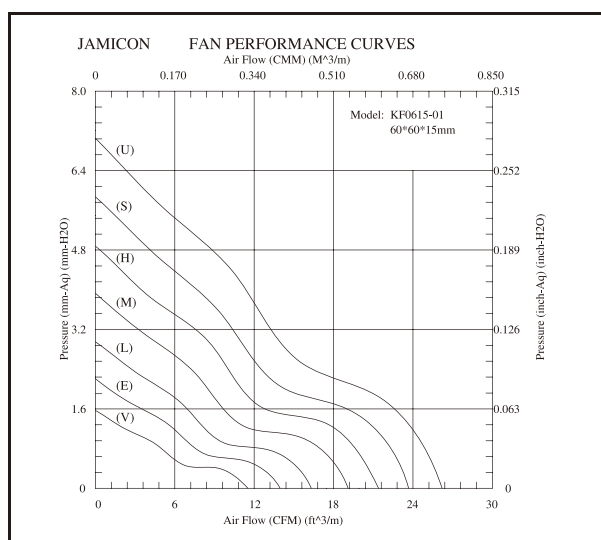

60X60X15 mm

KF0615-02 Series

- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$





SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Power (Watt)	Noise (dBA)	Weight (g)
KF0615-5MR	B, H	5	4.25~5.75	18.78	0.14	4000	0.42	2.10	2.4	30.0	36
KF0615-5L	B, H, S			16.33	0.11	3500	0.23	1.15	1.3	26.9	
KF0615-5E	B, H, S			13.83	0.08	3000	0.16	0.80	0.9	22.8	
KF0615-5V	B, H, S			11.21	0.06	2500	0.10	0.50	0.6	21.5	
KF0615-1UR	B, H	12	10.2~13.8	26.54	0.26	5500	0.24	2.88	3.1	39.7	
KF0615-1S				24.40	0.22	5000	0.20	2.40	2.5	35.7	
KF0615-1H	B, H, S			21.35	0.18	4500	0.19	2.28	2.3	33.1	
KF0615-1M	B, H, S			18.78	0.14	4000	0.15	1.80	1.9	30.0	
KF0615-1L	B, H, S			16.33	0.11	3500	0.10	1.20	1.3	26.9	
KF0615-1E	B, H, S			13.83	0.08	3000	0.08	0.96	1.0	22.8	
KF0615-1V	B, H, S			11.21	0.06	2500	0.06	0.72	0.8	21.5	
KF0615-2UR	B, H	24	20.4~27.6	26.54	0.26	5500	0.18	4.32	4.6	39.7	
KF0615-2S				24.40	0.22	5000	0.15	3.60	3.7	35.7	
KF0615-2H	B, H, S			21.35	0.18	4500	0.12	2.88	3.0	33.1	
KF0615-2M	B, H, S			18.78	0.14	4000	0.09	2.16	2.3	30.0	
KF0615-2L	B, H, S			16.33	0.11	3500	0.07	1.68	1.7	26.9	
KF0615-2E	B, H, S			13.83	0.08	3000	0.05	1.20	1.4	22.8	
KF0615-2V	B, H, S			11.21	0.06	2500	0.04	0.96	1.2	21.5	


Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".
Please contact us for detail if your request bearing system is not shown in the above list.

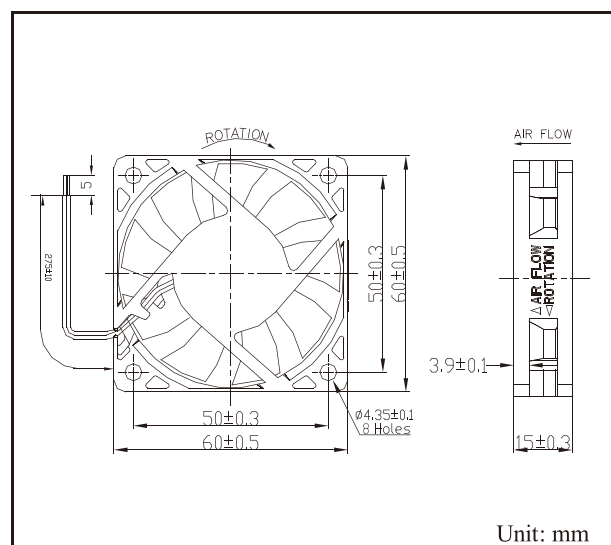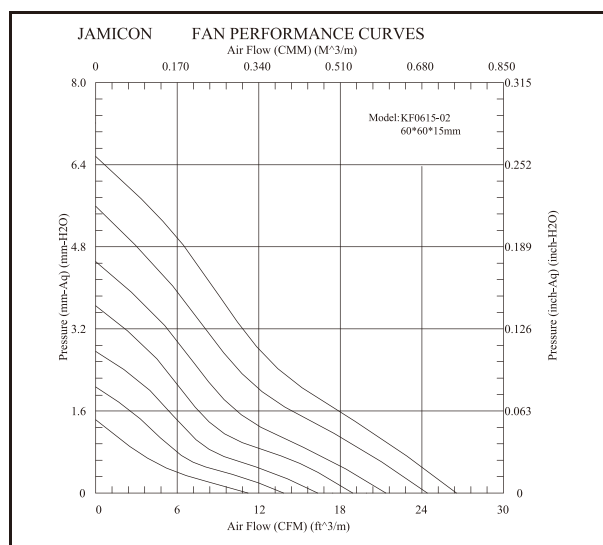

60X60X15 mm

KF0615-03 Series



- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$



SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Power (Watt)	Noise (dBA)	Weight (g)
KF0615-5MR	B, H	5	4.25~5.75	18.78	0.14	4000	0.42	2.10	2.4	30.0	37
KF0615-5L	B, H, S			16.33	0.11	3500	0.23	1.15	1.3	26.9	
KF0615-5E	B, H, S			13.83	0.08	3000	0.16	0.80	0.9	22.8	
KF0615-5V	B, H, S			11.21	0.06	2500	0.10	0.50	0.6	21.5	
KF0615-1UR	B, H	12	10.2~13.8	26.54	0.26	5500	0.24	2.88	3.1	39.7	
KF0615-1S				24.40	0.22	5000	0.20	2.40	2.5	35.7	
KF0615-1H	B, H, S			21.35	0.18	4500	0.19	2.28	2.3	33.1	
KF0615-1M	B, H, S			18.78	0.14	4000	0.15	1.80	1.9	30.0	
KF0615-1L	B, H, S			16.33	0.11	3500	0.10	1.20	1.3	26.9	
KF0615-1E	B, H, S			13.83	0.08	3000	0.08	0.96	1.0	22.8	
KF0615-1V	B, H, S			11.21	0.06	2500	0.06	0.72	0.8	21.5	
KF0615-2UR	B, H	24	20.4~27.6	26.54	0.26	5500	0.18	4.32	4.6	39.7	
KF0615-2S				24.40	0.22	5000	0.15	3.60	3.7	35.7	
KF0615-2H	B, H, S			21.35	0.18	4500	0.12	2.88	3.0	33.1	
KF0615-2M	B, H, S			18.78	0.14	4000	0.09	2.16	2.3	30.0	
KF0615-2L	B, H, S			16.33	0.11	3500	0.07	1.68	1.7	26.9	
KF0615-2E	B, H, S			13.83	0.08	3000	0.05	1.20	1.4	22.8	
KF0615-2V	B, H, S			11.21	0.06	2500	0.04	0.96	1.2	21.5	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".

Please contact us for detail if your request bearing system is not shown in the above list.

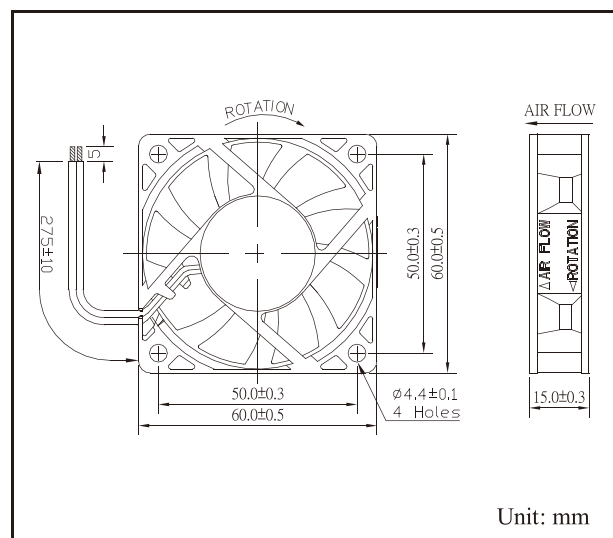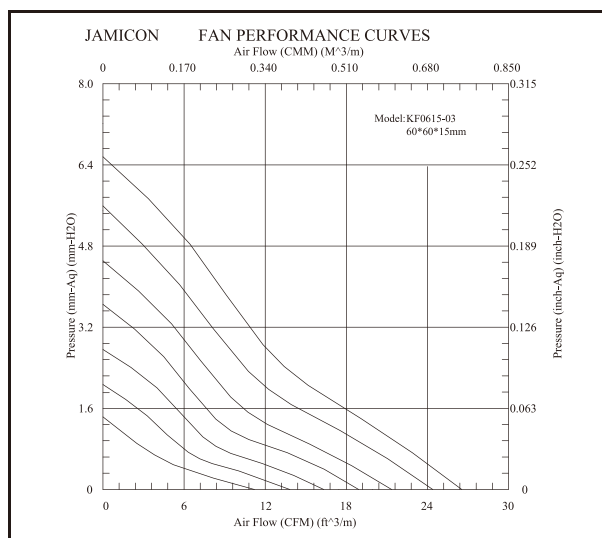

60X60X15 mm

JF0615-00 Series



- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$



SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
JF0615-5HR	B, S	5	4.25 ~ 5.75	15.45	0.165	4500	0.25	1.25	0.26	30.5	45
JF0615-5MR	B, S			13.58	0.140	4000	0.20	1.00	0.21	28.8	
JF0615-5L	B, S			11.86	0.107	3500	0.17	0.85	0.17	25.4	
JF0615-5E	B, S			9.82	0.081	3000	0.14	0.70	0.14	21.2	
JF0615-5V	B, S			8.39	0.059	2500	0.11	0.55	0.11	17.9	
JF0615B1UR	B	12	10.2 ~ 13.8	18.87	0.220	5500	0.15	1.80	0.16	37.5	
JF0615B1S	B			17.16	0.200	5000	0.14	1.68	0.15	33.7	
JF0615-1H	B, S			15.45	0.165	4500	0.13	1.56	0.17	30.5	
JF0615-1M	B, S			13.58	0.140	4000	0.12	1.44	0.15	28.8	
JF0615-1L	B, S			11.86	0.107	3500	0.10	1.20	0.12	25.4	
JF0615-1E	B, S			9.82	0.081	3000	0.08	0.96	0.09	21.2	
JF0615-1V	B, S			8.39	0.059	2500	0.07	0.84	0.07	17.9	
JF0615B2UR	B	24	20.4 ~ 27.6	18.87	0.220	5500	0.11	2.64	0.12	37.5	
JF0615B2S	B			17.16	0.200	5000	0.10	2.40	0.11	33.7	
JF0615-2H	B, S			15.45	0.165	4500	0.13	3.12	0.13	30.5	
JF0615-2M	B, S			13.58	0.140	4000	0.11	2.64	0.11	28.8	
JF0615-2L	B, S			11.86	0.107	3500	0.09	2.16	0.09	25.4	
JF0615-2E	B, S			9.82	0.081	3000	0.06	1.44	0.06	21.2	
JF0615-2V	B, S			8.39	0.059	2500	0.04	0.96	0.04	17.9	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".

Please contact us for detail if your request bearing system is not shown in the above list.

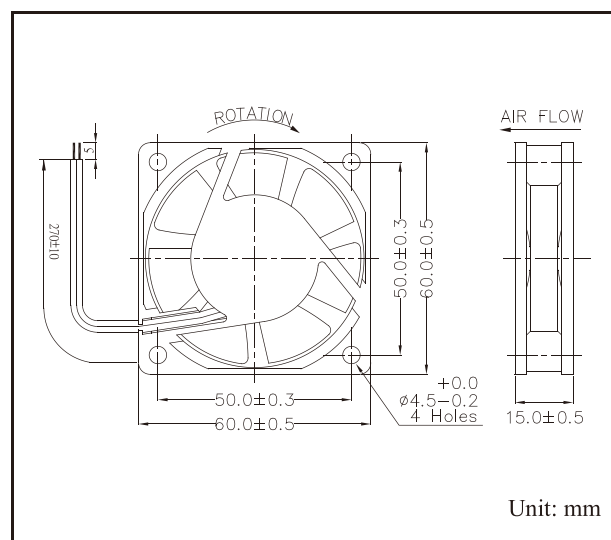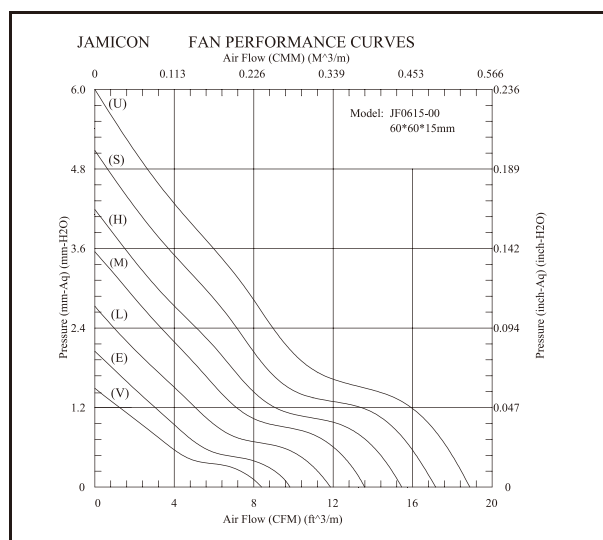

60X60X20 mm

KF0620-01 Series



- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$



SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Power (Watt)	Noise (dBA)	Weight (g)
KF0620-1SRAO	B	12	10.2 ~ 13.8	37.00	0.457	6500	0.38	4.56	4.8	48.2	43
KF0620-1SR	B, H			28.27	0.289	5000	0.38	4.56	4.8	39.2	
KF0620-1HR	B, H, S			25.36	0.233	4500	0.25	3.00	3.2	36.2	
KF0620-1M	B, H, S			22.40	0.186	4000	0.20	2.40	2.5	32.4	
KF0620-1L	B, H, S			19.45	0.142	3500	0.14	1.68	1.7	27.8	
KF0620-1E	B, H, S			16.66	0.105	3000	0.10	1.20	1.3	25.2	
KF0620-1V	B, H, S			13.82	0.072	2500	0.07	0.84	0.9	20.7	
KF0620-2SR	B, H	24	20.4 ~ 27.6	28.27	0.289	5000	0.21	5.04	5.1	39.2	
KF0620-2H	B, H, S			25.36	0.233	4500	0.14	3.36	3.5	36.2	
KF0620-2M	B, H, S			22.40	0.186	4000	0.12	2.88	3.1	32.4	
KF0620-2L	B, H, S			19.45	0.142	3500	0.10	2.40	2.5	27.8	
KF0620-2E	B, H, S			16.66	0.105	3000	0.07	1.68	1.7	25.2	
KF0620-2V	B, H, S			13.82	0.072	2500	0.04	0.96	1.2	20.7	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".

Please contact us for detail if your request bearing system is not shown in the above list.

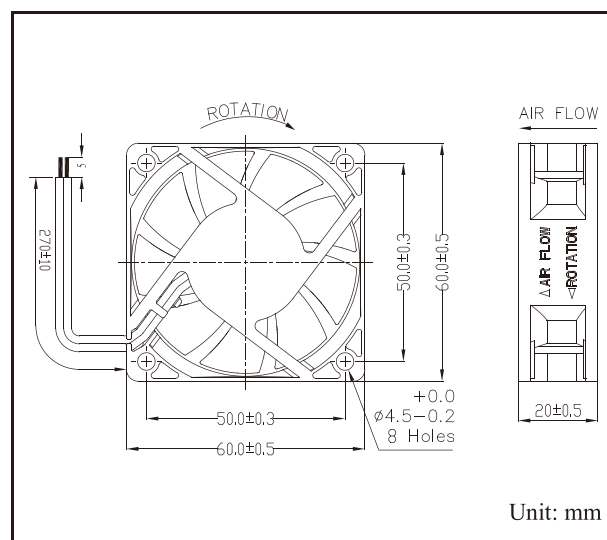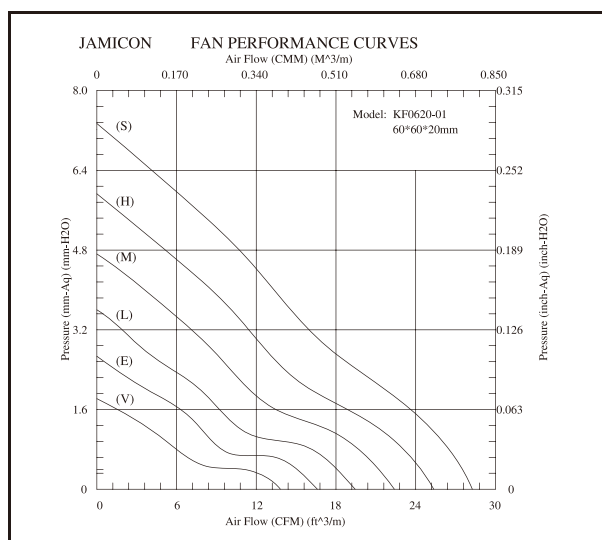

60X60X20 mm

JF0620-00 Series



- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$



SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
JF0620B1UR	B	12	10.2 ~ 13.8	19.11	0.291	5500	0.19	2.28	0.20	35.9	50
JF0620-1SR	B, S			17.41	0.247	5000	0.17	2.04	0.18	32.8	
JF0620-1H	B, S			15.56	0.196	4500	0.15	1.80	0.17	29.4	
JF0620-1M	B, S			13.84	0.157	4000	0.13	1.56	0.15	26.4	
JF0620-1L	B, S			12.06	0.127	3500	0.10	1.20	0.13	23.6	
JF0620-1E	B, S			10.13	0.090	3000	0.09	1.08	0.09	20.3	
JF0620-1V	B, S			8.48	0.068	2500	0.07	0.84	0.07	17.1	
JF0620B2UR	B	24	20.4 ~ 27.6	19.11	0.291	5500	0.12	2.88	0.13	35.9	
JF0620-2S	B, S			17.41	0.247	5000	0.10	2.40	0.11	32.8	
JF0620-2H	B, S			15.56	0.196	4500	0.09	2.16	0.13	29.4	
JF0620-2M	B, S			13.84	0.157	4000	0.08	1.92	0.11	26.4	
JF0620-2L	B, S			12.06	0.127	3500	0.07	1.68	0.07	23.6	
JF0620-2E	B, S			10.13	0.090	3000	0.06	1.44	0.06	20.3	
JF0620-2V	B, S			8.48	0.068	2500	0.05	1.20	0.05	17.1	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".

Please contact us for detail if your request bearing system is not shown in the above list.

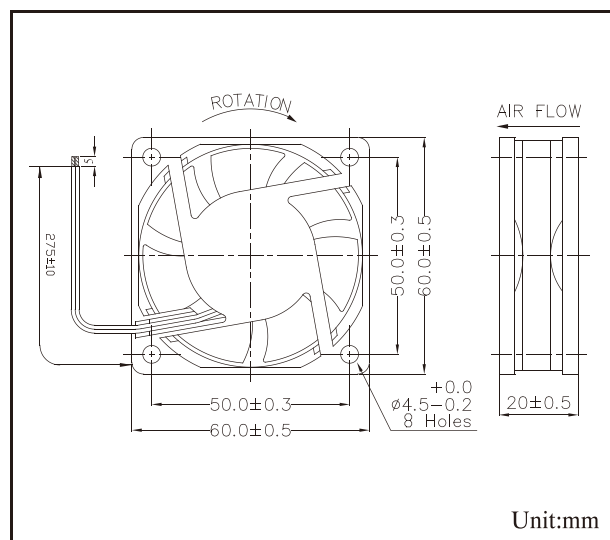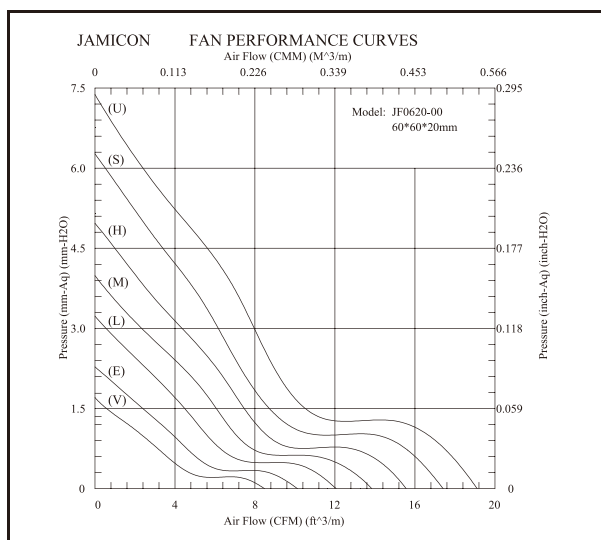

60X60X25 mm

JF0625-00 Series



- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$



SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Power (Amp)	Noise (dBA)	Weight (g)
JF0625B1TRAL	B	12	10.2 ~ 13.8	36.24	0.578	7200	0.38	4.56	0.38	49.5	59
JF0625B1TR	B			29.69	0.422	6000	0.37	4.44	0.38	42.5	
JF0625B1UR	B,H			26.96	0.357	5500	0.29	3.48	0.30	39.6	
JF0625-1S	B,H, S			24.27	0.292	5000	0.22	2.64	0.22	37.2	
JF0625-1H	B,H, S			21.44	0.237	4500	0.20	2.40	0.23	34.1	
JF0625-1M	B,H, S			19.00	0.185	4000	0.16	1.92	0.20	31.3	
JF0625-1L	B,H, S			16.76	0.145	3500	0.13	1.56	0.17	27.3	
JF0625-1E	B,H, S			14.24	0.108	3000	0.11	1.32	0.11	22.4	
JF0625-1V	B,H, S			11.72	0.076	2500	0.08	0.96	0.08	20.2	
JF0625B2TRAJ	B	24	20.4 ~ 27.6	35.15	0.552	7000	0.21	5.04	0.21	48.3	
JF0625B2TR	B			29.69	0.422	6000	0.20	4.80	0.21	42.5	
JF0625B2UR	B,H			26.96	0.357	5500	0.16	3.84	0.16	39.6	
JF0625-2S	B,H			24.27	0.292	5000	0.13	3.12	0.14	37.2	
JF0625-2H	B,H, S			21.44	0.237	4500	0.12	2.88	0.17	34.1	
JF0625-2M	B,H, S			19.00	0.185	4000	0.11	2.64	0.13	31.3	
JF0625-2L	B,H, S			16.76	0.145	3500	0.10	2.40	0.12	27.3	
JF0625-2E	B,H, S			14.24	0.108	3000	0.07	1.68	0.07	22.4	
JF0625-2V	B,H, S			11.72	0.076	2500	0.06	1.44	0.06	20.2	
JF0625B4UR	B,H	48	40.8 ~ 55.2	26.96	0.357	5500	0.11	5.28	0.11	39.6	
JF0625B4SR	B,H			24.27	0.292	5000	0.09	4.32	0.09	37.2	
JF0625B4HR	B,H, S			21.44	0.237	4500	0.07	3.36	0.08	34.1	
JF0625B4MR	B,H, S			19.00	0.185	4000	0.06	2.88	0.07	31.3	
JF0625B4LR	B,H, S			16.76	0.145	3500	0.05	2.40	0.06	27.3	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".

Please contact us for detail if your request bearing system is not shown in the above list.

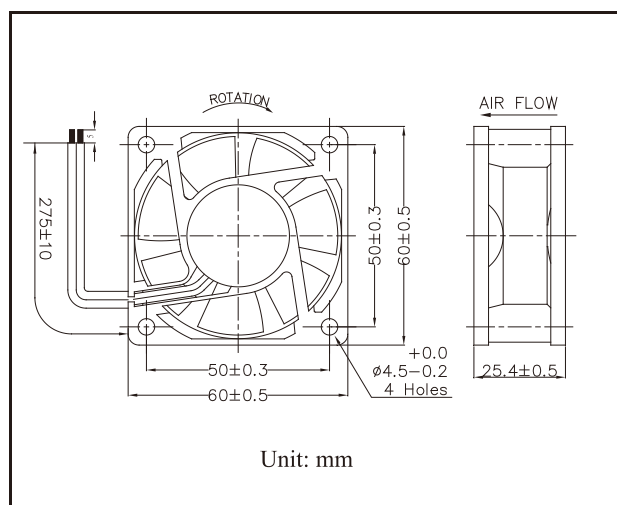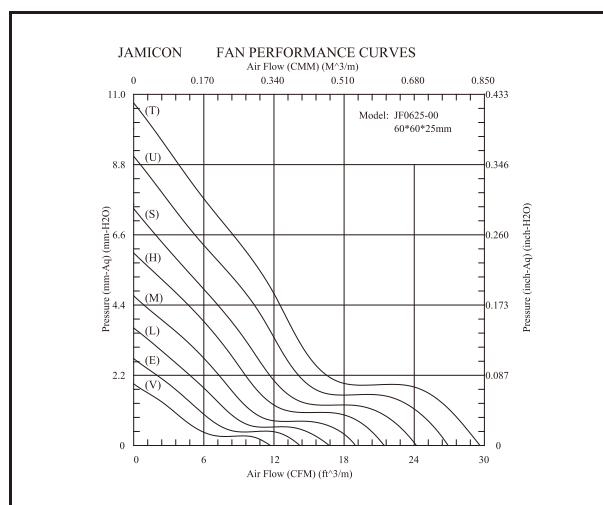

Unit: mm

60X60X25 mm

JF0625-01 Series

- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$





SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Power (Amp)	Noise (dBA)	Weight (g)
JF0625B1TRAL	B	12	10.2 ~ 13.8	35.70	0.509	7200	0.38	4.56	0.38	46.9	59
JF0625B1TR	B			29.77	0.401	6000	0.37	4.44	0.38	42.1	
JF0625-1UR	B, H			27.17	0.338	5500	0.29	3.48	0.30	40.1	
JF0625-1S	B, H, S			24.12	0.263	5000	0.22	2.64	0.22	37.2	
JF0625-1H	B, H, S			21.56	0.215	4500	0.20	2.40	0.23	34.5	
JF0625-1M	B, H, S			19.15	0.172	4000	0.16	1.92	0.20	30.5	
JF0625-1L	B, H, S			16.78	0.134	3500	0.13	1.56	0.17	27.4	
JF0625-1E	B, H, S			14.26	0.097	3000	0.11	1.32	0.11	23.1	
JF0625-1V	B, H, S			11.84	0.070	2500	0.08	0.96	0.08	20.1	
JF0625B2TRAJ	B	24	20.4 ~ 27.6	34.71	0.491	7000	0.21	5.04	0.21	46.1	
JF0625B2TR	B			29.77	0.401	6000	0.20	4.80	0.21	42.1	
JF0625-2UR	B, H			27.17	0.338	5500	0.16	3.84	0.16	40.1	
JF0625-2S	B, H, S			24.12	0.263	5000	0.13	3.12	0.14	37.2	
JF0625-2H	B, H, S			21.56	0.215	4500	0.12	2.88	0.17	34.5	
JF0625-2M	B, H, S			19.15	0.172	4000	0.11	2.64	0.13	30.5	
JF0625-2L	B, H, S			16.78	0.134	3500	0.10	2.40	0.12	27.4	
JF0625-2E	B, H, S			14.26	0.097	3000	0.07	1.68	0.07	23.1	
JF0625-2V	B, H, S			11.84	0.070	2500	0.06	1.44	0.06	20.1	
JF0625B4UR	B, H	48	40.8 ~ 55.2	27.17	0.338	5500	0.11	5.28	0.11	40.1	
JF0625B4SR	B, H			24.12	0.263	5000	0.09	4.32	0.09	37.2	
JF0625B4HR	B, H, S			21.56	0.215	4500	0.07	3.36	0.08	34.5	
JF0625B4MR	B, H, S			19.15	0.172	4000	0.06	2.88	0.07	30.5	
JF0625B4LR	B, H, S			16.78	0.134	3500	0.05	2.40	0.06	27.4	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".

Please contact us for detail if your request bearing system is not shown in the above list.

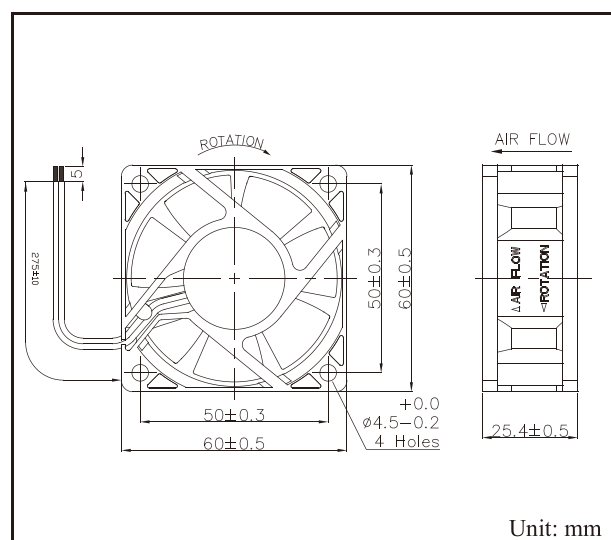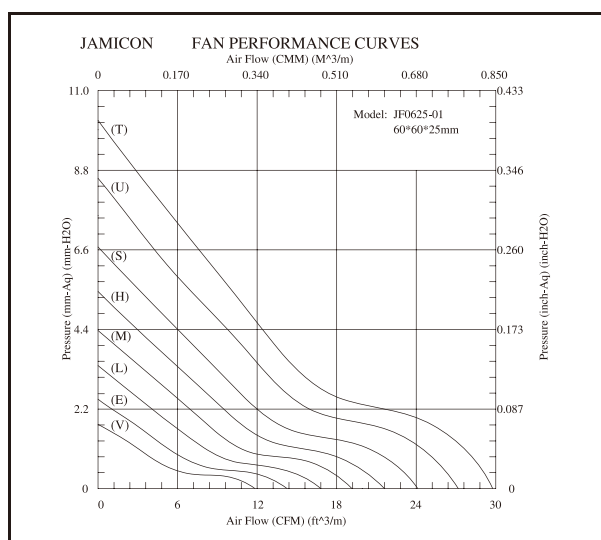

60X60X25 mm

JF0625-02 Series



- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$



SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Power (Watt)	Noise (dBA)	Weight (g)
JF0625B1TRAL	B	12	10.2 ~ 13.8	35.70	0.509	7200	0.38	4.56	0.38	46.9	59
JF0625B1TR	B			29.77	0.401	6000	0.37	4.44	0.38	42.1	
JF0625-1UR	B, H			27.17	0.338	5500	0.29	3.48	0.30	40.1	
JF0625-1S	B, H, S			24.12	0.263	5000	0.22	2.64	0.22	37.2	
JF0625-1H	B, H, S			21.56	0.215	4500	0.20	2.40	0.23	34.5	
JF0625-1M	B, H, S			19.15	0.172	4000	0.16	1.92	0.20	30.5	
JF0625-1L	B, H, S			16.78	0.134	3500	0.13	1.56	0.17	27.4	
JF0625-1E	B, H, S			14.26	0.097	3000	0.11	1.32	0.11	23.1	
JF0625-1V	B, H, S			11.84	0.070	2500	0.08	0.96	0.08	20.1	
JF0625B2TRAJ	B	24	20.4 ~ 27.6	34.71	0.491	7000	0.21	5.04	0.21	46.1	
JF0625B2TR	B			29.77	0.401	6000	0.20	4.80	0.21	42.1	
JF0625-2UR	B, H			27.17	0.338	5500	0.16	3.84	0.16	40.1	
JF0625-2S	B, H, S			24.12	0.263	5000	0.13	3.12	0.14	37.2	
JF0625-2H	B, H, S			21.56	0.215	4500	0.12	2.88	0.17	34.5	
JF0625-2M	B, H, S			19.15	0.172	4000	0.11	2.64	0.13	30.5	
JF0625-2L	B, H, S			16.78	0.134	3500	0.10	2.40	0.12	27.4	
JF0625-2E	B, H, S			14.26	0.097	3000	0.07	1.68	0.07	23.1	
JF0625-2V	B, H, S			11.84	0.070	2500	0.06	1.44	0.06	20.1	
JF0625B4UR	B, H	48	40.8 ~ 55.2	27.17	0.338	5500	0.11	5.28	0.11	40.1	
JF0625B4SR	B, H			24.12	0.263	5000	0.09	4.32	0.09	37.2	
JF0625B4HR	B, H, S			21.56	0.215	4500	0.07	3.36	0.08	34.5	
JF0625B4MR	B, H, S			19.15	0.172	4000	0.06	2.88	0.07	30.5	
JF0625B4LR	B, H, S			16.78	0.134	3500	0.05	2.40	0.06	27.4	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".

Please contact us for detail if your request bearing system is not shown in the above list.

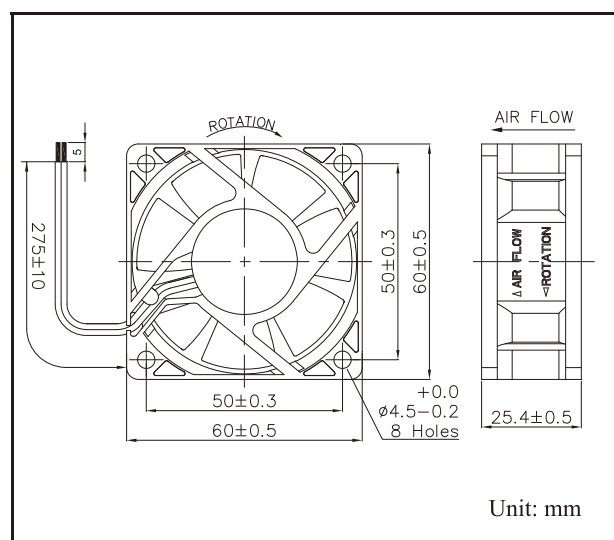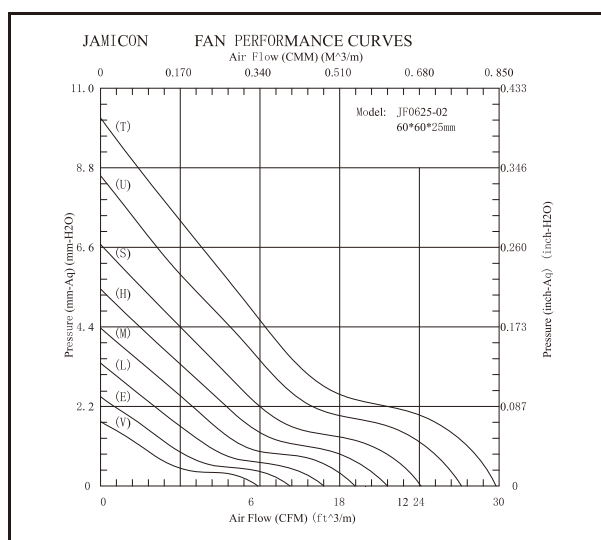

60X60X38 mm

JF0638-11 Series



- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$



SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
JF0638B1TR	B	12	10.2 ~ 13.8	71.27	1.924	12000	1.46	17.52	1.61	64.3	113
JF0638B1UR				59.14	1.497	10500	0.92	11.04	1.01	59.5	
JF0638B1SR				53.92	1.049	9000	0.59	7.08	0.65	53.8	
JF0638B1HR				44.54	0.800	7500	0.40	4.80	0.44	49.2	
JF0638B1MR				35.53	0.452	6000	0.23	2.76	0.25	44.4	
JF0638B1LR				28.89	0.310	5000	0.18	2.16	0.20	37.4	
JF0638B1ER				25.35	0.241	4500	0.13	1.56	0.14	35.4	
JF0638B1VR				23.10	0.203	4000	0.10	1.20	0.11	33.2	
JF0638B2TR	B	24	20.4 ~ 27.6	71.27	1.924	12000	0.77	18.48	0.85	64.3	
JF0638B2UR				59.14	1.497	10500	0.48	11.52	0.53	59.5	
JF0638B2SR				53.92	1.049	9000	0.35	8.40	0.39	53.8	
JF0638B2HR				44.54	0.800	7500	0.19	4.56	0.21	49.2	
JF0638B2MR				35.53	0.452	6000	0.14	3.36	0.15	44.4	
JF0638B2LR				28.89	0.310	5000	0.12	2.88	0.13	37.4	
JF0638B2ER				25.35	0.241	4500	0.08	1.92	0.09	35.4	
JF0638B2VR				23.10	0.203	4000	0.07	1.68	0.08	33.2	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page “PART NUMBER SYSTEM”.

Please contact us for detail if your request bearing system is not shown in the above list.

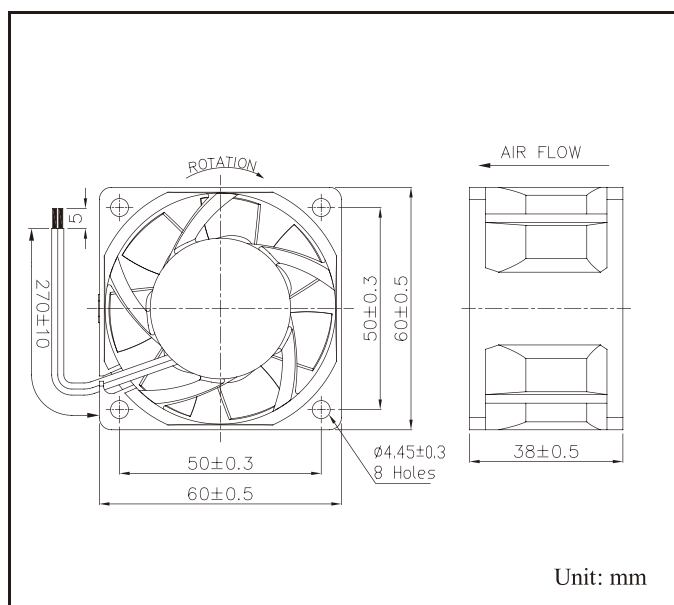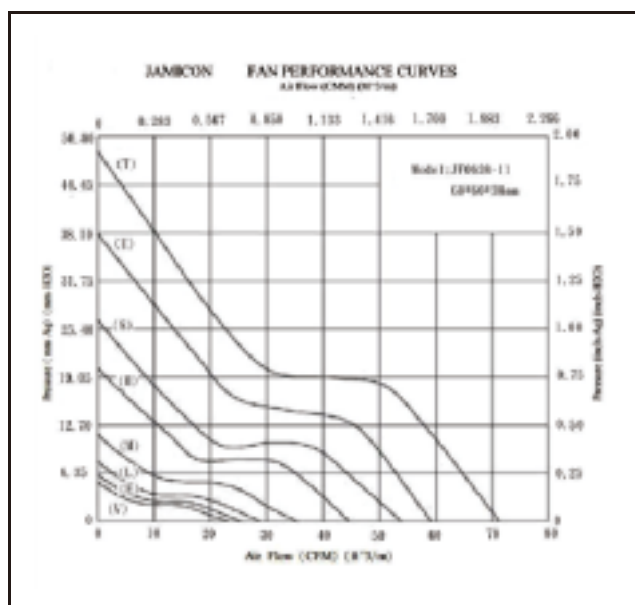

70X70X15 mm

KF0715-01 Series



- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$



SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
KF0715-1SR	B, H	12	10.2~13.8	40.45	0.238	5000	0.35	4.20	0.41	41.3	49
KF0715-1HR	B, H, S			34.05	0.174	4200	0.30	3.60	0.33	37.1	
KF0715-1M	B, H, S			29.16	0.134	3600	0.19	2.28	0.21	32.7	
KF0715-1L	B, H, S			24.00	0.093	3000	0.12	1.44	0.14	28.2	
KF0715-2SR	B	24	20.4~27.6	40.45	0.238	5000	0.25	6.00	0.28	41.3	
KF0715-2HR	B,H,S			34.05	0.174	4200	0.14	3.36	0.18	37.1	
KF0715-2M	B,H,S			29.16	0.134	3600	0.09	2.16	0.12	32.7	
KF0715-2L	B,H,S			24.00	0.093	3000	0.06	1.44	0.08	28.2	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".

Please contact us for detail if your request bearing system is not shown in the above list.

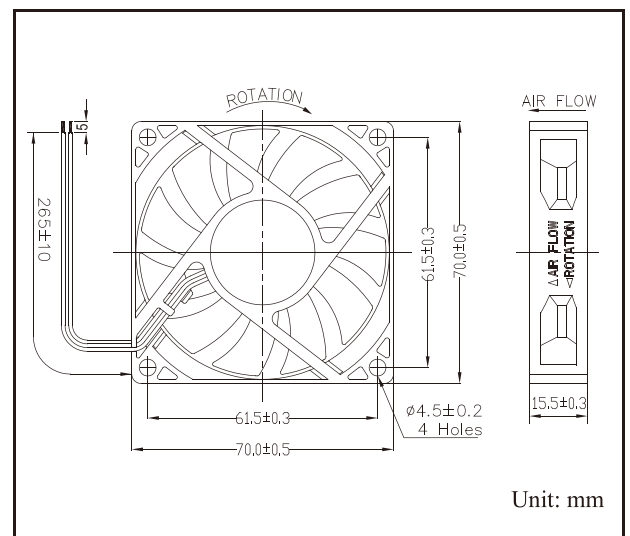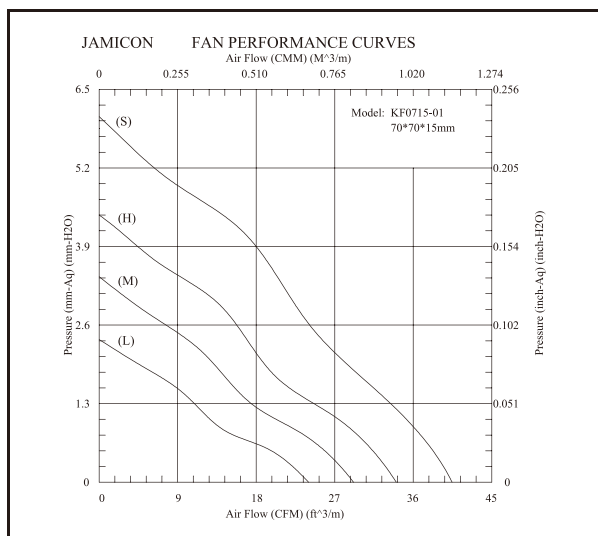

70X70X25 mm

DF0725-11 Series

- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$





SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
DF0725-1SR	B	12	10.2~13.8	41.79	0.320	5000	0.22	2.64	0.30	44.8	70
DF0725-1HR	S			36.52	0.249	4000	0.14	1.68	0.26	36.8	
DF0725-1MR	H			32.84	0.184	3000	0.11	1.32	0.22	32.6	
DF0725-1LR	F			23.98	0.100	2500	0.08	0.96	0.14	26.3	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".
Please contact us for detail if your request bearing system is not shown in the above list.

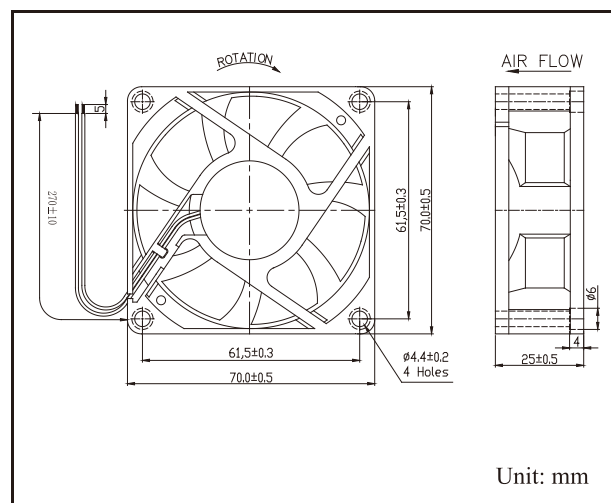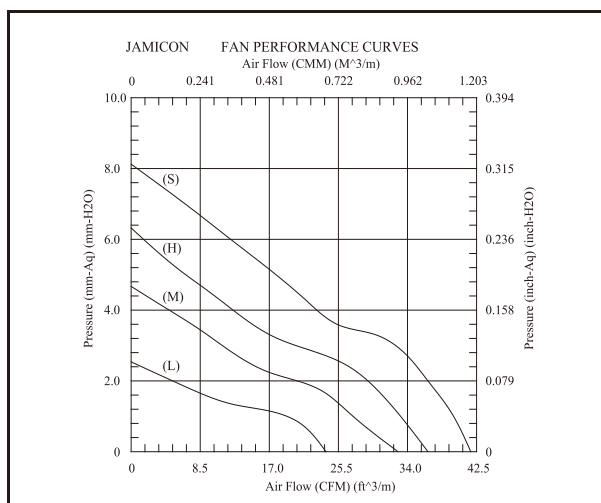

80X80X10 mm

DF0810-11 Series



- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$



SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
DF0810-5SR	B S H F	5	4.25~5.75	24.13	0.093	3500	0.45	2.25	0.45	34.5	40
DF0810-5HR				22.27	0.073	3000	0.25	1.25	0.25	29.3	
DF0810-5MR				17.42	0.057	2500	0.20	1.00	0.20	24.2	
DF0810-5LR				13.56	0.044	2000	0.16	0.80	0.16	21.1	
DF0810-1HR		12	10.2~13.8	22.27	0.073	3000	0.28	3.36	0.34	29.3	
DF0810-1MR				17.42	0.057	2500	0.18	2.16	0.28	24.2	
DF0810-1LR				13.56	0.044	2000	0.14	1.68	0.20	21.1	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page “PART NUMBER SYSTEM”.

Please contact us for detail if your request bearing system is not shown in the above list.

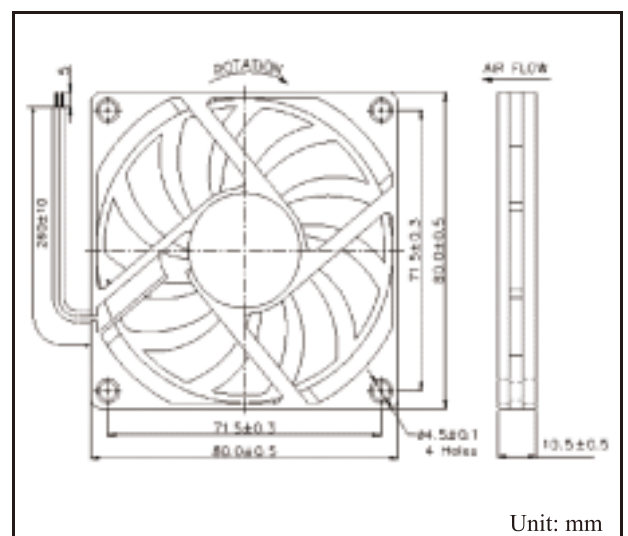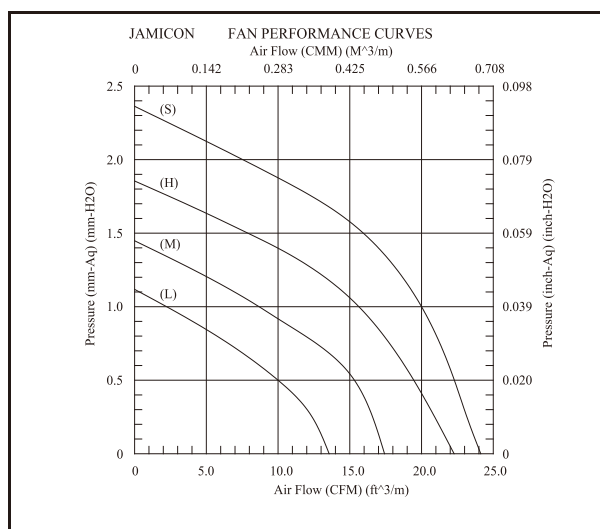

80X80X15 mm

JF0815-03 Series

- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$





SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
JF0815-1URAE	B	12	10.2 ~ 13.8	47.00	0.225	4500	0.34	4.08	0.34	40.8	49
JF0815-1UR	B, H			41.75	0.185	4000	0.31	3.72	0.34	38.0	
JF0815-1SR	B, H, S			36.50	0.145	3500	0.20	2.40	0.22	35.2	
JF0815-1H	B, H, S			31.22	0.111	3000	0.15	1.80	0.17	30.3	
JF0815-1M	B, H, S			25.79	0.081	2500	0.10	1.20	0.11	25.6	
JF0815-1L	B, H, S			20.73	0.053	2000	0.05	0.60	0.06	21.6	
JF0815-2URAB	B	24	20.4 ~ 27.6	43.85	0.201	4200	0.17	4.08	0.17	39.1	
JF0815-2UR	B, H			41.75	0.185	4000	0.15	3.60	0.17	38.0	
JF0815-2SR	B, H			36.50	0.145	3500	0.11	2.64	0.14	35.2	
JF0815-2H	B, H, S			31.22	0.111	3000	0.09	2.16	0.10	30.3	
JF0815-2M	B, H, S			25.79	0.081	2500	0.06	1.44	0.07	25.6	
JF0815-2L	B, H, S			20.73	0.053	2000	0.05	1.20	0.06	21.6	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".

Please contact us for detail if your request bearing system is not shown in the above list.

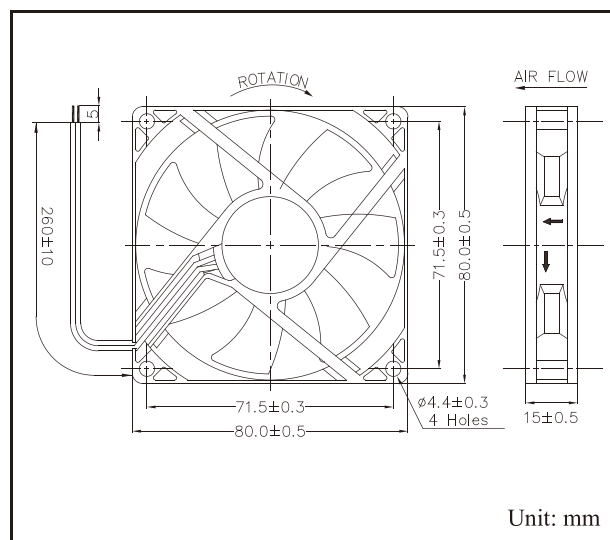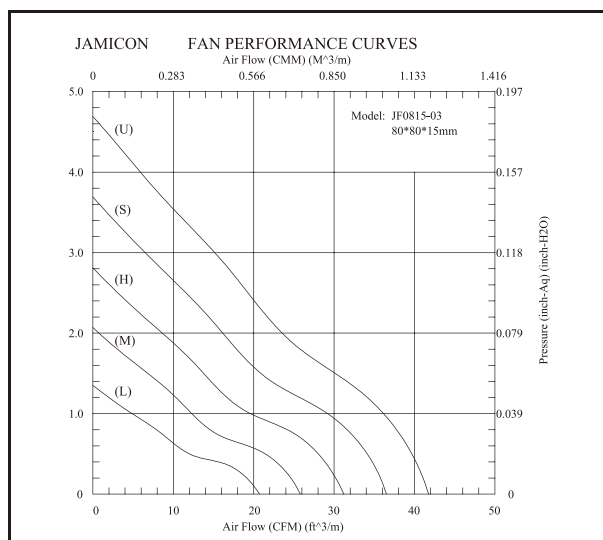

80X80X20 mm

KF0820-01 Series





- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$

SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
KF0820-1URAJ	B	12	10.2 ~ 13.8	52.51	0.313	5000	0.30	3.60	0.30	47.8	61
KF0820-1UR	B, H			41.87	0.223	4000	0.27	3.24	0.30	39.6	
KF0820-1SR	B, H, S			36.55	0.178	3500	0.20	2.40	0.22	35.5	
KF0820-1H	B, H, S			31.09	0.135	3000	0.14	1.68	0.15	31.4	
KF0820-1M	B, H, S			25.75	0.097	2500	0.08	0.96	0.09	26.5	
KF0820-1L	B, H, S			20.44	0.065	2000	0.06	0.72	0.07	21.3	
KF0820-1E	B, H, S			15.20	0.039	1500	0.04	0.48	0.05	14.2	
KF0820-2UR	B, H	24	20.4 ~ 27.6	41.87	0.223	4000	0.13	1.56	0.15	39.6	
KF0820-2SR	B, H, S			36.55	0.178	3500	0.10	2.40	0.11	35.5	
KF0820-2H	B, H, S			31.09	0.135	3000	0.07	1.68	0.08	31.4	
KF0820-2M	B, H, S			25.75	0.097	2500	0.06	1.44	0.07	26.5	
KF0820-2L	B, H, S			20.44	0.065	2000	0.04	0.96	0.05	21.3	
KF0820-2E	B, H, S			15.20	0.039	1500	0.03	0.72	0.04	14.2	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page “PART NUMBER SYSTEM”.
Please contact us for detail if your request bearing system is not shown in the above list.

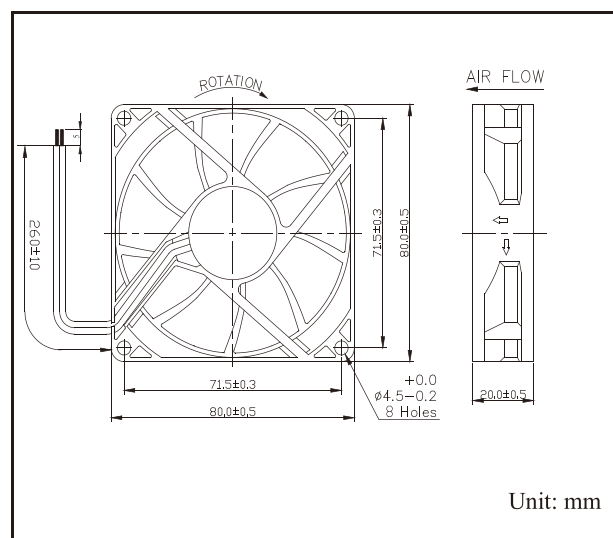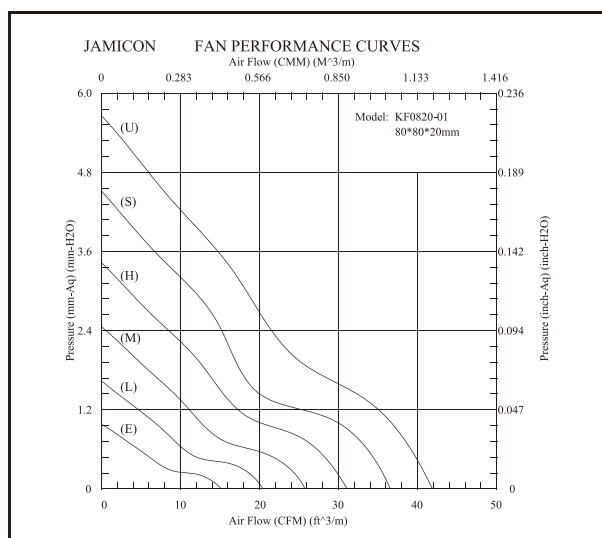

80X80X25 mm

SF0825-11 Series



- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$



SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
SF0825B1TRA	B	12	10.2~13.8	80.09	0.554	6000	0.50	6.00	0.52	51.4	90
SF0825-1TR	B			76.40	0.459	5500	0.47	5.64	0.52	48.1	
SF0825-1UR	B			70.49	0.416	5100	0.33	3.96	0.43	45.5	
SF0825-1SR	B			61.51	0.322	4600	0.25	3.00	0.29	42.4	
SF0825-1HR	B			54.53	0.270	4100	0.17	2.04	0.24	38.6	
SF0825-1MR	B,S			48.10	0.210	3600	0.14	1.68	0.19	36.4	
SF0825-1LR	B,S			42.70	0.192	3100	0.10	1.20	0.16	31.5	
SF0825-1ER	B,S			35.52	0.132	2600	0.08	0.96	0.12	26.5	
SF0825-1VR	B,S			28.29	0.090	2100	0.06	0.72	0.08	22.3	
SF0825-2TR	B	24	20.4~27.6	76.40	0.459	5500	0.21	5.04	0.25	48.1	
SF0825-2UR	B			70.49	0.416	5100	0.17	4.08	0.22	45.5	
SF0825-2SR	B			61.51	0.322	4600	0.12	2.88	0.15	42.4	
SF0825-2HR	B			54.53	0.270	4100	0.08	1.92	0.12	38.6	
SF0825-2MR	B,S			48.10	0.210	3600	0.07	1.68	0.10	36.4	
SF0825-2LR	B,S			42.70	0.192	3100	0.06	0.44	0.08	31.5	
SF0825-2ER	B,S			35.52	0.132	2600	0.05	1.20	0.06	26.5	
SF0825-2VR	B,S			28.29	0.090	2100	0.04	0.96	0.05	22.3	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".

Please contact us for detail if your request bearing system is not shown in the above list.

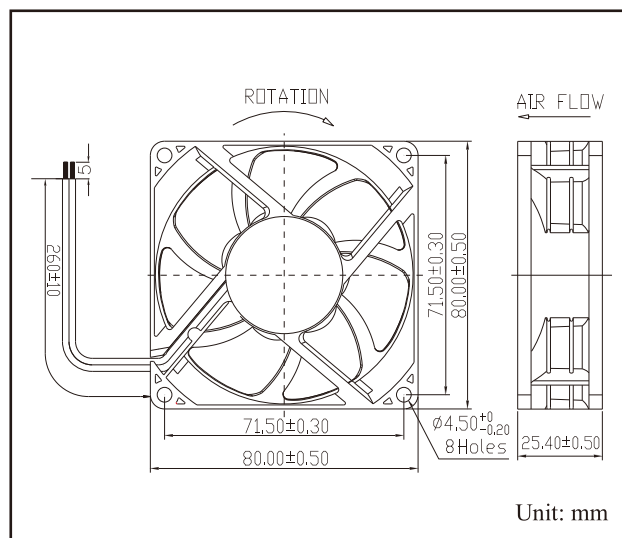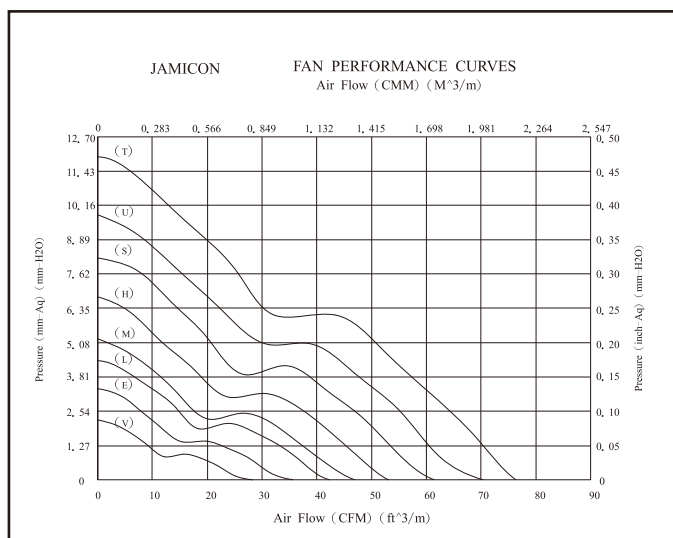

80X80X25 mm

KF0825-11 Series





- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$

SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
KF0825B1TR	B	12	10.2 ~ 13.8	57.28	0.38	4500	0.42	5.04	0.50	42.10	86
KF0825B1UR				50.25	0.30	4000	0.29	3.48	0.35	39.00	
KF0825B1SR				43.97	0.23	3500	0.25	3.00	0.30	34.80	
KF0825-1H	B, H, S			37.40	0.17	3000	0.17	2.04	0.20	30.90	
KF0825-1M	B, H, S			30.60	0.12	2500	0.10	1.20	0.12	25.80	
KF0825-1L	B, H, S			24.20	0.08	2000	0.07	0.84	0.08	22.30	
KF0825-1E	B, H, S			18.44	0.05	1500	0.04	0.48	0.05	20.50	
KF0825B2UR	B	24	20.4 ~ 27.6	50.25	0.30	4000	0.17	4.08	0.20	39.00	
KF0825B2SR				43.97	0.23	3500	0.15	3.60	0.18	34.80	
KF0825-2H	B, H, S			37.40	0.17	3000	0.11	2.64	0.13	30.90	
KF0825-2M	B, H, S			30.60	0.12	2500	0.08	1.92	0.10	25.80	
KF0825-2L	B, H, S			24.20	0.08	2000	0.06	1.44	0.07	22.30	
KF0825-2E	B, H, S			18.44	0.05	1500	0.04	0.96	0.05	20.50	
KF0825B4UR	B	48	40.8 ~ 55.2	50.25	0.30	4000	0.13	6.24	0.16	39.00	
KF0825B4SR				43.97	0.23	3500	0.10	4.80	0.12	34.80	
KF0825B4HR				37.40	0.17	3000	0.07	3.36	0.08	30.90	
KF0825B4MR				30.60	0.12	2500	0.05	2.40	0.06	25.80	
KF0825B4LR				24.20	0.08	2000	0.03	1.44	0.04	22.30	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM". Please contact us for detail if your request bearing system is not shown in the above list.

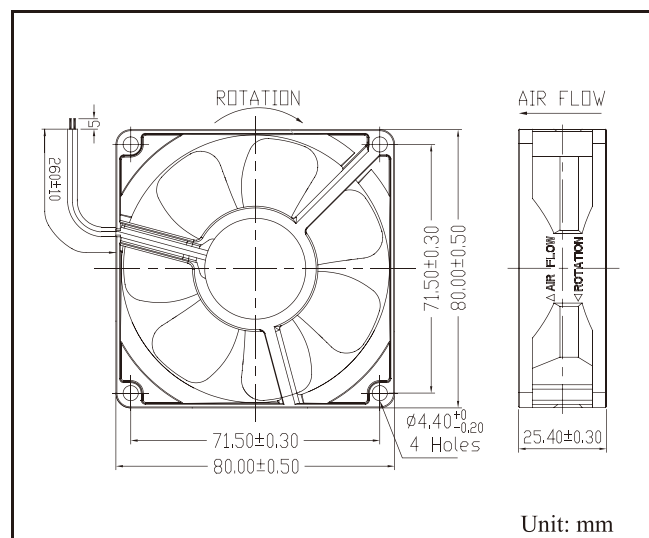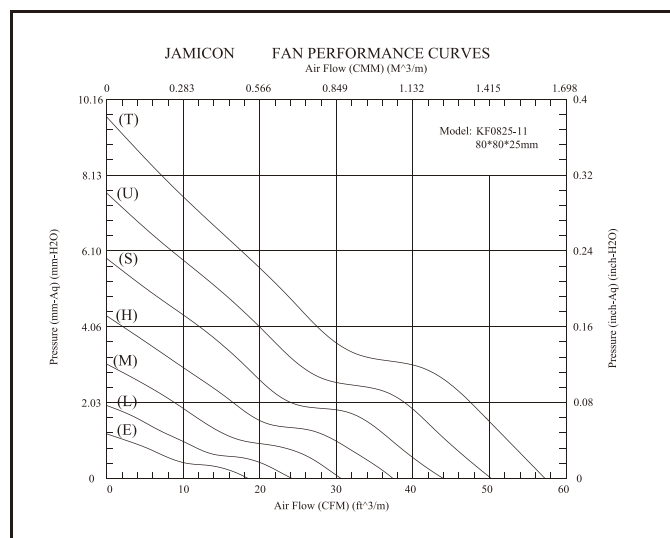

80X80X25 mm

JF0825-01 Series





- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$

SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
JF0825-1URAE	B, H	12	10.2 ~ 13.8	58.10	0.293	4500	0.37	4.44	0.37	43.9	73
JF0825-1UR	B, H			52.20	0.242	4000	0.37	4.44	0.37	40.7	
JF0825-1SR	B, H, S			45.50	0.191	3500	0.26	3.12	0.26	36.7	
JF0825-1H	B, H, S			38.39	0.141	3000	0.19	2.28	0.19	32.1	
JF0825-1M	B, H, S			32.41	0.098	2500	0.13	1.56	0.15	28.8	
JF0825-1L	B, H, S			25.66	0.065	2000	0.09	1.08	0.10	22.4	
JF0825-1E	B, H, S			18.93	0.039	1500	0.06	0.72	0.06	13.9	
JF0825-2TR	B, H	24	20.4 ~ 27.6	58.10	0.293	4500	0.27	6.48	0.27	43.9	
JF0825-2UR				52.20	0.242	4000	0.21	5.04	0.21	40.7	
JF0825-2SR	B, H, S			45.50	0.191	3500	0.16	3.84	0.17	36.7	
JF0825-2H	B, H, S			38.39	0.141	3000	0.13	3.12	0.15	32.1	
JF0825-2M	B, H, S			32.41	0.098	2500	0.10	2.40	0.13	28.8	
JF0825-2L	B, H, S			25.66	0.065	2000	0.08	1.92	0.10	22.4	
JF0825-2E	B, H, S			18.93	0.039	1500	0.04	0.96	0.05	13.9	
JF0825B4SR	B	48	40.8 ~ 55.2	45.50	0.191	3500	0.10	4.80	0.10	36.7	
JF0825B4HR				38.39	0.141	3000	0.08	3.84	0.08	32.1	
JF0825B4MR				32.41	0.098	2500	0.06	2.88	0.06	28.8	
JF0825B4LR				25.66	0.065	2000	0.05	2.40	0.05	22.4	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".
Please contact us for detail if your request bearing system is not shown in the above list.

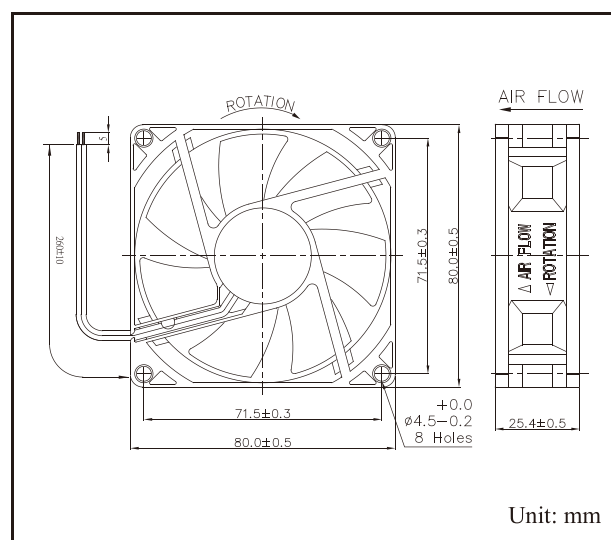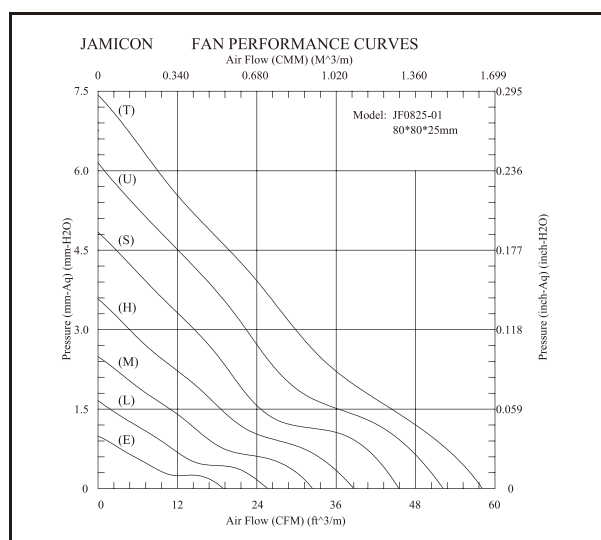

80X80X25 mm

JF0825-02 Series





- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$

SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
JF0825-1URAE	B, H	12	10.2 ~ 13.8	59.12	0.272	4500	0.37	4.44	0.37	43.5	79
JF0825-1UR	B, H			52.90	0.230	4000	0.37	4.44	0.37	40.8	
JF0825-1SR	B, H, S			45.00	0.187	3500	0.26	3.12	0.26	35.9	
JF0825-1H	B, H, S			38.67	0.146	3000	0.19	2.28	0.19	31.4	
JF0825-1M	B, H, S			32.42	0.100	2500	0.13	1.56	0.15	27.9	
JF0825-1L	B, H, S			25.81	0.066	2000	0.09	1.08	0.10	22.1	
JF0825-1E	B, H, S			19.43	0.039	1500	0.06	0.72	0.06	17.5	
JF0825-2TR	B, H	24	20.4 ~ 27.6	59.12	0.272	4500	0.27	6.48	0.27	43.5	
JF0825-2UR				52.90	0.230	4000	0.21	5.04	0.21	40.8	
JF0825-2SR	B, H, S			45.00	0.187	3500	0.16	3.84	0.17	35.9	
JF0825-2H	B, H, S			38.67	0.146	3000	0.13	3.12	0.15	31.4	
JF0825-2M	B, H, S			32.42	0.100	2500	0.10	2.40	0.13	27.9	
JF0825-2L	B, H, S			25.81	0.066	2000	0.08	1.92	0.10	22.1	
JF0825-2E	B, H, S			19.43	0.039	1500	0.04	0.96	0.05	17.5	
JF0825B4SR	B	48	40.8 ~ 55.2	45.00	0.187	3500	0.10	4.80	0.10	35.9	
JF0825B4HR				38.67	0.146	3000	0.08	3.84	0.08	31.4	
JF0825B4MR				32.42	0.100	2500	0.06	2.88	0.06	27.9	
JF0825B4LR				25.81	0.066	2000	0.05	2.40	0.05	22.1	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page “PART NUMBER SYSTEM”.
Please contact us for detail if your request bearing system is not shown in the above list.

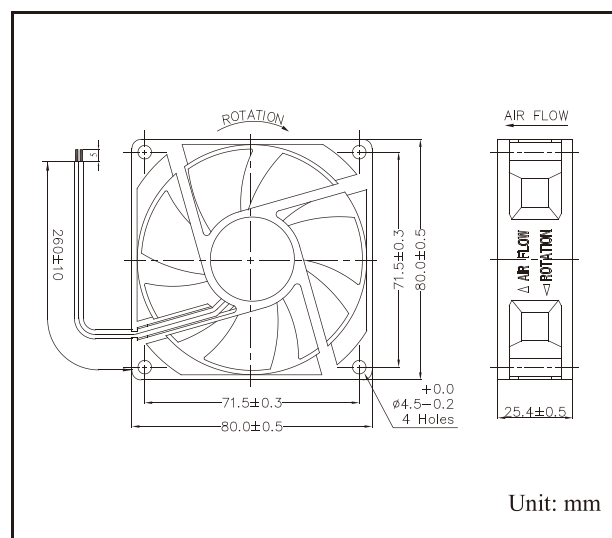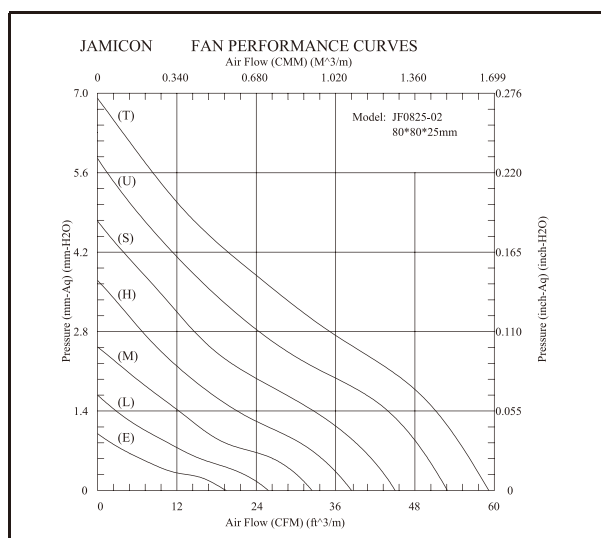

80X80X25 mm

JF0825-00 Series





- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$

SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
JF0825B1UR	B	12	10.2 ~ 13.8	52.06	0.227	4000	0.37	4.44	0.37	40.0	70
JF0825-1SR	B, S			45.46	0.189	3500	0.26	3.12	0.26	35.8	
JF0825-1H	B, S			38.74	0.142	3000	0.19	2.28	0.19	31.0	
JF0825-1M	B, S			32.52	0.099	2500	0.13	1.56	0.15	27.8	
JF0825-1L	B, S			25.54	0.067	2000	0.09	1.08	0.10	22.2	
JF0825-1E	B, S			19.09	0.039	1500	0.06	0.72	0.06	15.9	
JF0825B2TR	B	24	20.4 ~ 27.6	57.84	0.272	4500	0.27	6.48	0.27	42.4	
JF0825B2UR				52.06	0.227	4000	0.21	5.04	0.21	40.0	
JF0825-2SR	B, S			45.46	0.189	3500	0.16	3.84	0.17	35.8	
JF0825-2H	B, S			38.74	0.142	3000	0.13	3.12	0.15	31.0	
JF0825-2M	B, S			32.52	0.099	2500	0.10	2.40	0.13	27.8	
JF0825-2L	B, S			25.54	0.067	2000	0.08	1.92	0.10	22.2	
JF0825-2E	B, S			19.09	0.039	1500	0.04	0.96	0.05	15.9	
JF0825B4SR	B	48	40.8 ~ 55.2	45.46	0.189	3500	0.10	4.80	0.10	35.8	
JF0825B4HR				38.74	0.142	3000	0.08	3.84	0.08	31.0	
JF0825B4MR				32.52	0.099	2500	0.06	2.88	0.06	27.8	
JF0825B4LR				25.54	0.067	2000	0.05	2.40	0.05	22.2	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM". Please contact us for detail if your request bearing system is not shown in the above list.

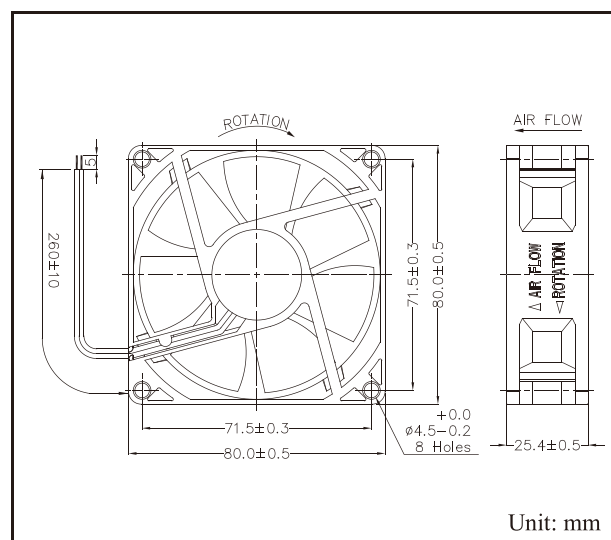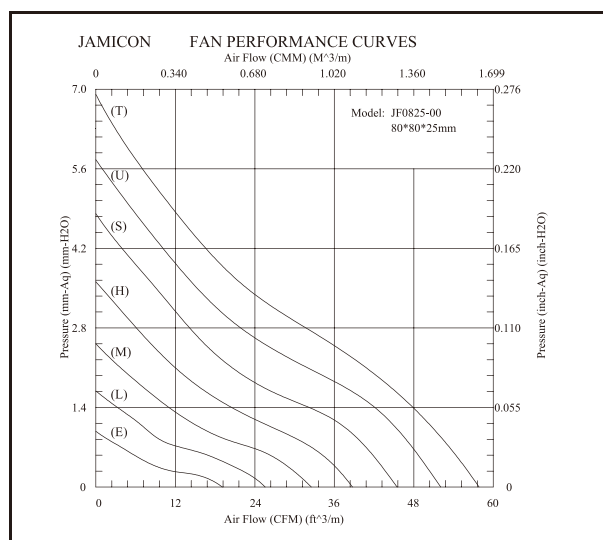

80X80X38 mm

KF0838-11 Series





- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$

SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
KF0838B1UR	B	12	10.2 ~ 13.8	106.39	1.23	7000	1.50	18.00	2.20	60.30	188
KF0838B1SR				90.85	0.96	6100	0.98	11.76	1.20	56.40	
KF0838B1HR				75.79	0.62	5000	0.60	7.20	0.72	50.90	
KF0838B1MR				61.29	0.47	4200	0.40	4.80	0.48	46.20	
KF0838B1LR				52.55	0.34	3500	0.27	3.24	0.32	41.40	
KF0838B1ER				35.93	0.17	2500	0.14	1.68	0.17	32.30	
KF0838B1VR				28.36	0.11	2000	0.10	1.20	0.12	27.30	
KF0838B2UR	B	24	20.4 ~ 27.6	106.39	1.23	7000	0.70	16.80	0.84	60.30	
KF0838B2SR				90.85	0.96	6100	0.52	12.48	0.62	56.40	
KF0838B2HR				75.79	0.62	5000	0.32	7.68	0.36	50.90	
KF0838B2MR				61.29	0.47	4200	0.22	5.28	0.26	46.20	
KF0838B2LR				52.55	0.34	3500	0.14	3.36	0.17	41.40	
KF0838B2ER				35.93	0.17	2500	0.08	1.92	0.10	32.30	
KF0838B2VR				28.36	0.11	2000	0.06	1.44	0.07	27.30	
KF0838B4UR	B	48	40.8 ~ 55.2	106.39	1.23	7000	0.37	17.76	0.44	60.30	
KF0838B4SR				90.85	0.96	6100	0.24	11.52	0.29	56.40	
KF0838B4HR				75.79	0.62	5000	0.20	9.60	0.24	50.90	
KF0838B4MR				61.29	0.47	4200	0.15	7.20	0.18	46.20	
KF0838B4LR				52.55	0.34	3500	0.14	6.72	0.17	41.40	
KF0838B4ER				35.93	0.17	2500	0.10	4.80	0.12	32.30	
KF0838B4VR				28.36	0.11	2000	0.08	3.84	0.10	27.30	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".
Please contact us for detail if your request bearing system is not shown in the above list.

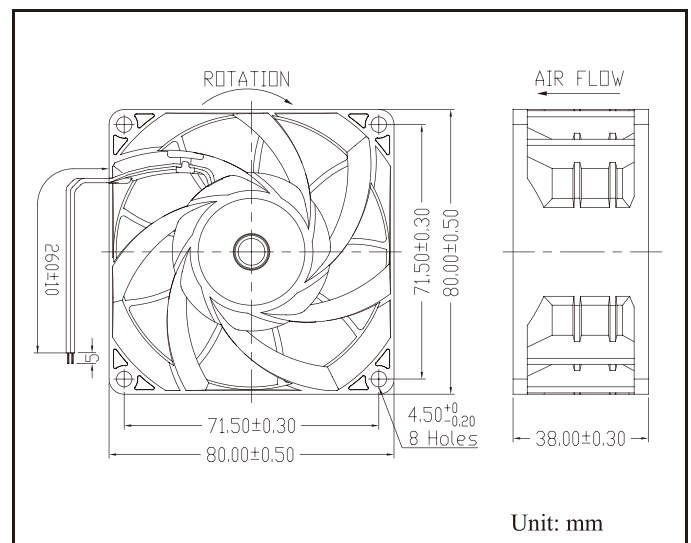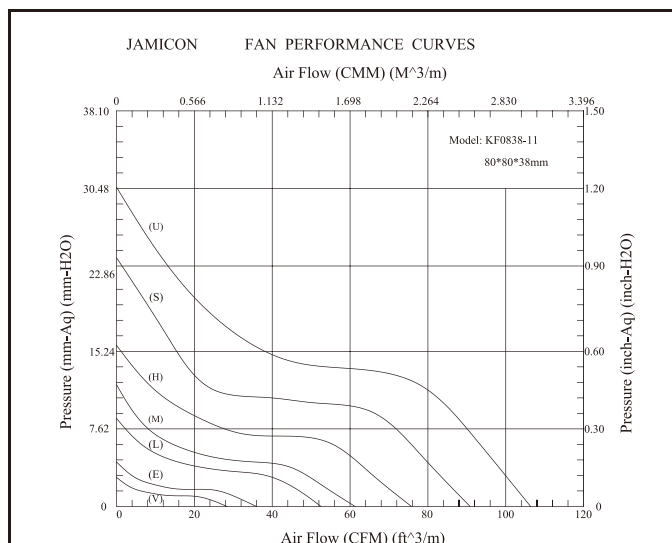

80X80X38 mm

JF0838-11 Series





- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$

SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
JF0838B1SR	B	12	10.2 ~ 13.8	90.38	0.795	6300	1.12	13.44	1.34	53.6	174
JF0838B1HR				80.58	0.632	5700	0.95	11.40	1.14	51.9	
JF0838B2SR	B	24	20.4~27.6	90.38	0.795	6300	0.60	14.40	0.72	53.6	
JF0838B2HR				80.58	0.632	5700	0.52	12.48	0.62	51.9	
JF0838B4SR	B	48	40.8~55.2	90.38	0.795	6300	0.33	15.84	0.40	53.6	
JF0838B4HR				80.58	0.632	5700	0.27	12.96	0.32	51.9	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".
Please contact us for detail if your request bearing system is not shown in the above list.

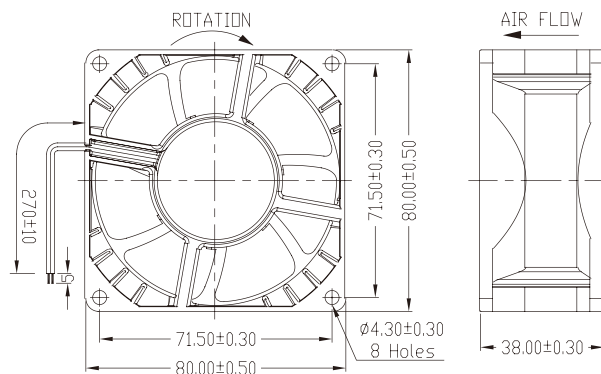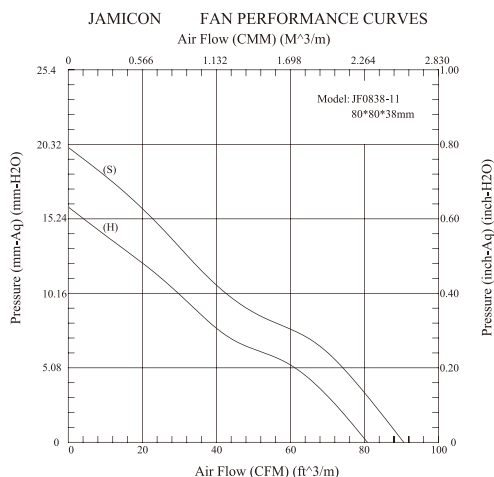

Unit: mm

92X92X25 mm

KF0925-11 Series





- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : ±10%

SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
KF0925-1TR	B	12	20.4~13.8	83.56	0.355	4400	0.48	5.76	0.54	48.5	100
KF0925-1UR	B			72.92	0.293	4000	0.33	3.96	0.42	45.9	
KF0925-1SR	B			60.14	0.200	3300	0.23	2.76	0.28	40.5	
KF0925-1HR	B,S			53.00	0.160	2900	0.16	1.91	0.24	36.7	
KF0925-1MR	B,S			47.80	0.130	2600	0.12	1.44	0.15	33.7	
KF0925-1LR	B,S			42.00	0.100	2300	0.09	1.08	0.10	30.5	
KF0925-1ER	B,S			33.28	0.070	1900	0.07	0.84	0.08	21.8	
KF0925-2TR	B	24	20.4~27.6	83.56	0.355	4400	0.26	6.24	0.29	48.5	
KF0925-2UR	B			72.92	0.293	4000	0.18	4.32	0.24	45.9	
KF0925-2SR	B			60.14	0.200	3300	0.10	2.40	0.15	40.5	
KF0925-2HR	B,S			53.00	0.160	2900	0.08	1.92	0.12	36.7	
KF0925-2MR	B,S			47.80	0.130	2600	0.07	1.68	0.10	33.7	
KF0925-2LR	B,S			42.00	0.100	2300	0.05	1.20	0.08	30.5	
KF0925-2ER	B,S			33.28	0.070	1900	0.04	0.96	0.07	21.8	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM". Please contact us for detail if your request bearing system is not shown in the above list.

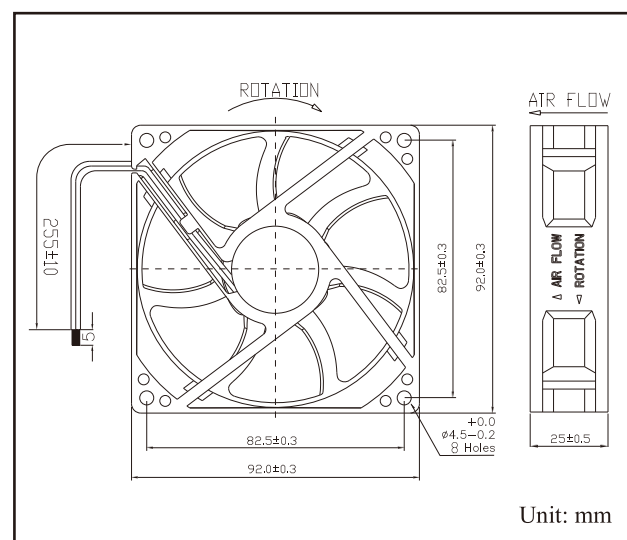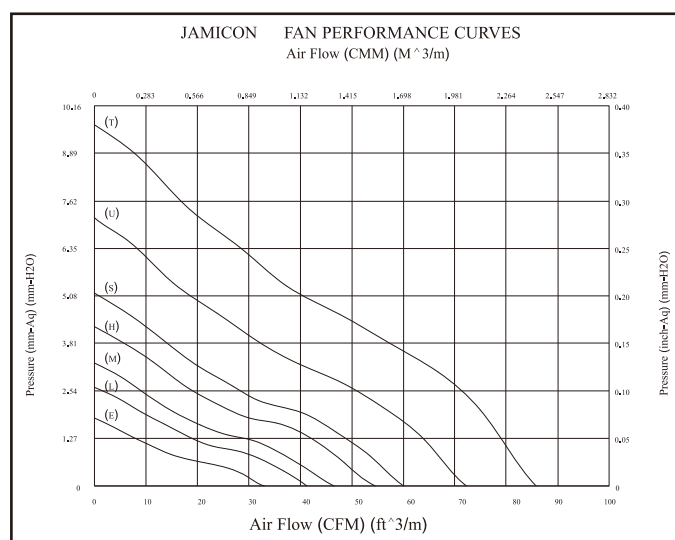

92X92X25 mm

JF0925-00 Series





- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$

SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
JF0925-1URAC	B	12	10.2 ~ 13.8	71.80	0.247	3800	0.40	4.80	0.42	44.9	81
JF0925-1UR	B, H			67.65	0.204	3500	0.35	4.20	0.42	41.9	
JF0925-1SR	B, H, S			60.75	0.172	3200	0.31	3.72	0.32	38.9	
JF0925-1H	B, H, S			52.04	0.139	2800	0.25	3.00	0.35	35.1	
JF0925-1M	B, H, S			46.31	0.115	2500	0.17	2.04	0.20	32.0	
JF0925-1L	B, H, S			38.64	0.080	2100	0.13	1.56	0.16	27.6	
JF0925-1E	B, H, S			30.86	0.054	1700	0.09	1.08	0.10	23.1	
JF0925-2URAC	B	24	20.4 ~ 27.6	71.80	0.247	3800	0.24	5.76	0.24	44.9	
JF0925-2UR	B, H			67.65	0.204	3500	0.23	5.52	0.24	41.9	
JF0925-2SR	B, H, S			60.75	0.172	3200	0.18	4.32	0.18	38.9	
JF0925-2H	B, H, S			52.04	0.139	2800	0.15	3.60	0.19	35.1	
JF0925-2M	B, H, S			46.31	0.115	2500	0.11	2.64	0.15	32.0	
JF0925-2L	B, H, S			38.64	0.080	2100	0.08	1.92	0.13	27.6	
JF0925-2E	B, H, S			30.86	0.054	1700	0.06	1.44	0.07	23.1	
JF0925B4HR	B	48	40.8 ~ 55.2	52.04	0.139	2800	0.09	4.32	0.09	35.1	
JF0925B4MR				46.31	0.115	2500	0.08	3.84	0.08	32.0	
JF0925B4LR				38.64	0.080	2100	0.06	2.88	0.06	27.6	
JF0925B4ER				30.86	0.054	1700	0.05	2.40	0.05	23.1	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".
Please contact us for detail if your request bearing system is not shown in the above list.

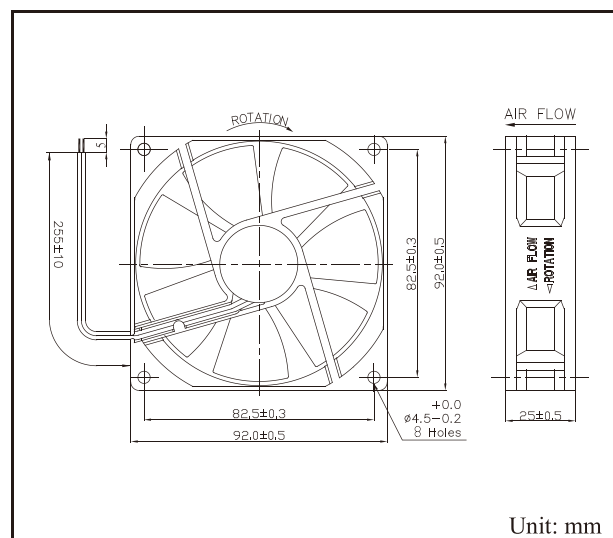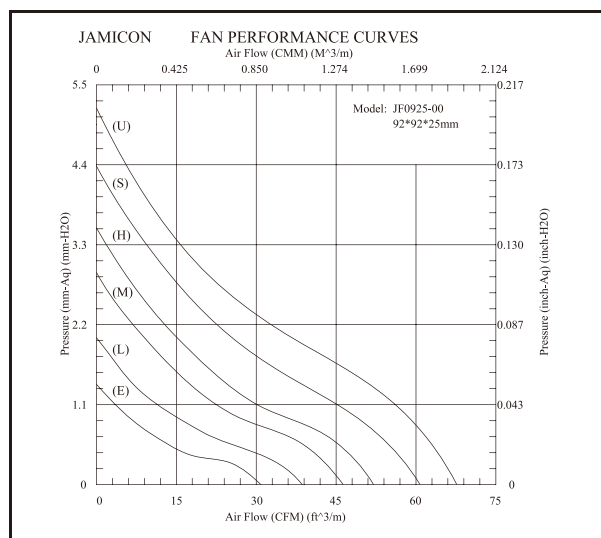

92X92X38 mm

KF0938-11 Series



- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$



SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
KF0938B1UR	B	12	10.2 ~ 13.8	153.07	0.99	6000	1.84	22.08	2.21	61.70	198
KF0938B1SR				121.01	0.66	4800	0.88	10.56	1.06	54.90	
KF0938B1HR				110.27	0.54	4400	0.70	8.40	0.84	52.90	
KF0938B1MR				97.15	0.41	3800	0.60	7.20	0.72	48.50	
KF0938B1LR				77.08	0.31	3200	0.43	5.16	0.52	43.30	
KF0938B1ER				61.60	0.20	2600	0.20	2.40	0.24	36.20	
KF0938B1VR				48.16	0.13	2000	0.13	1.56	0.16	31.40	
KF0938B2UR	B	24	20.4 ~ 27.6	153.07	0.99	6000	0.88	21.12	1.06	61.70	
KF0938B2SR				121.01	0.66	4800	0.42	10.08	0.50	54.90	
KF0938B2HR				110.27	0.54	4400	0.36	8.64	0.43	52.90	
KF0938B2MR				97.15	0.41	3800	0.35	8.40	0.42	48.50	
KF0938B2LR				77.08	0.31	3200	0.22	5.28	0.26	43.30	
KF0938B2ER				61.60	0.20	2600	0.11	2.64	0.13	36.20	
KF0938B2VR				48.16	0.13	2000	0.07	1.68	0.08	31.40	
KF0938B4UR	B	48	40.8 ~ 55.2	153.07	0.99	6000	0.48	23.04	0.58	61.70	
KF0938B4SR				121.01	0.66	4800	0.24	11.52	0.29	54.90	
KF0938B4HR				110.27	0.54	4400	0.20	9.60	0.24	52.90	
KF0938B4MR				97.15	0.41	3800	0.18	8.64	0.22	48.50	
KF0938B4LR				77.08	0.31	3200	0.15	7.20	0.18	43.30	
KF0938B4ER				61.60	0.20	2600	0.11	5.28	0.13	36.20	
KF0938B4VR				48.16	0.13	2000	0.07	3.36	0.08	31.40	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page “PART NUMBER SYSTEM”.

Please contact us for detail if your request bearing system is not shown in the above list.

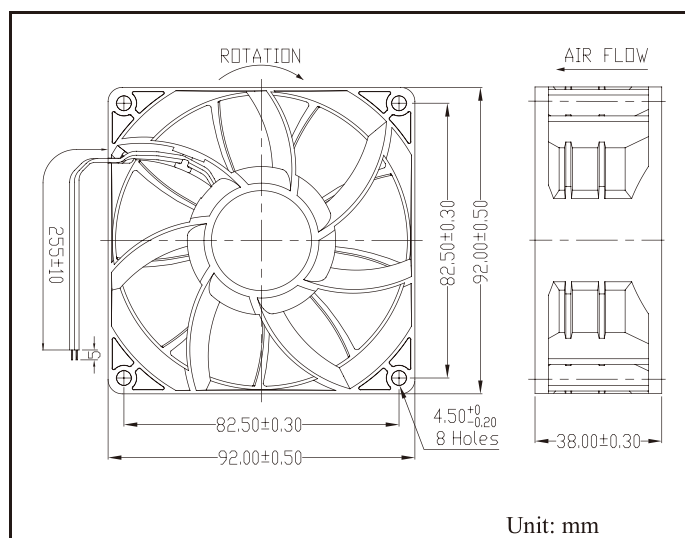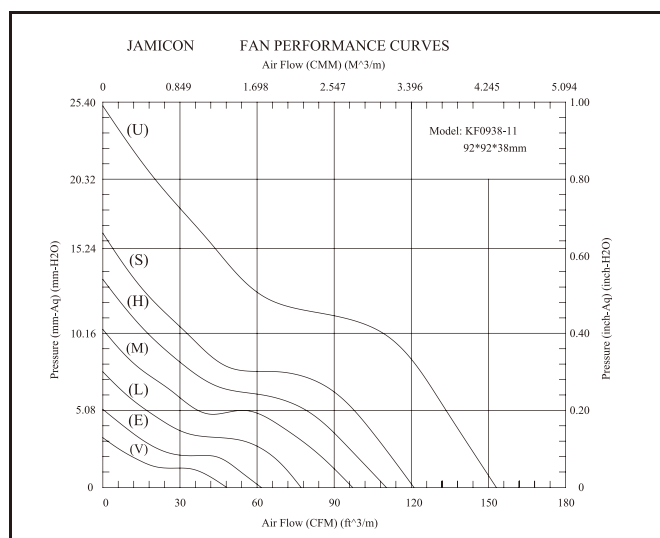

120X120X25 mm

JF1225-00 Series



- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$



SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
JF1225B1URAB	B	12	10.2 ~ 13.8	111.36	0.340	3200	0.50	6.00	0.50	47.8	205
JF1225B1UR				100.50	0.269	3000	0.50	6.00	0.50	45.7	
JF1225B1SR				89.87	0.224	2700	0.37	4.44	0.37	42.8	
JF1225-1H	B, S			80.11	0.186	2400	0.25	3.00	0.30	39.5	
JF1225-1M	B, S			69.57	0.147	2100	0.20	2.40	0.25	36.3	
JF1225-1L	B, S			59.57	0.111	1800	0.14	1.68	0.20	32.4	
JF1225-1E	B, S			47.88	0.078	1500	0.10	1.20	0.12	27.4	
JF1225B2URAB	B	24	20.4 ~ 27.6	111.36	0.340	3200	0.28	6.72	0.28	47.8	
JF1225B2UR				100.50	0.269	3000	0.28	6.72	0.28	45.7	
JF1225B2SR				89.87	0.224	2700	0.21	5.04	0.21	42.8	
JF1225-2H	B, S			80.11	0.186	2400	0.20	4.80	0.25	39.5	
JF1225-2M	B, S			69.57	0.147	2100	0.14	3.36	0.20	36.3	
JF1225-2L	B, S			59.57	0.111	1800	0.11	2.64	0.15	32.4	
JF1225-2E	B, S			47.88	0.078	1500	0.08	1.92	0.10	27.4	
JF1225B4UR	B	48	40.8 ~ 55.2	100.50	0.269	3000	0.14	6.72	0.14	45.7	
JF1225B4SR				89.87	0.224	2700	0.12	5.76	0.12	42.8	
JF1225B4HR				80.11	0.186	2400	0.10	4.80	0.10	39.5	
JF1225B4MR				69.57	0.147	2100	0.08	3.84	0.08	36.3	
JF1225B4LR				59.57	0.111	1800	0.07	3.36	0.07	32.4	
JF1225B4ER				47.88	0.078	1500	0.06	2.88	0.06	27.4	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".

Please contact us for detail if your request bearing system is not shown in the above list.

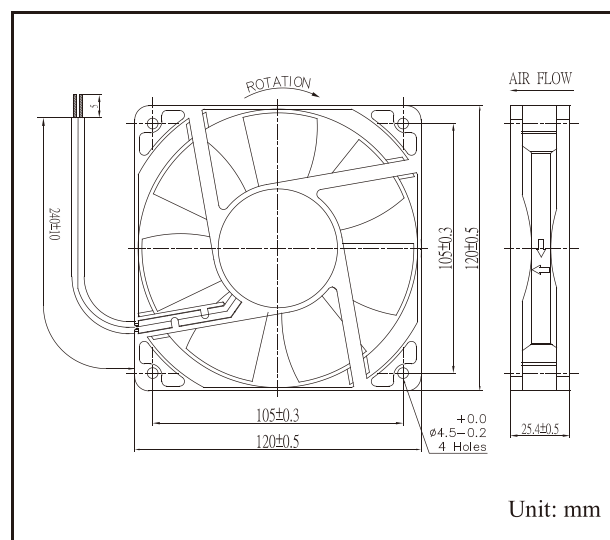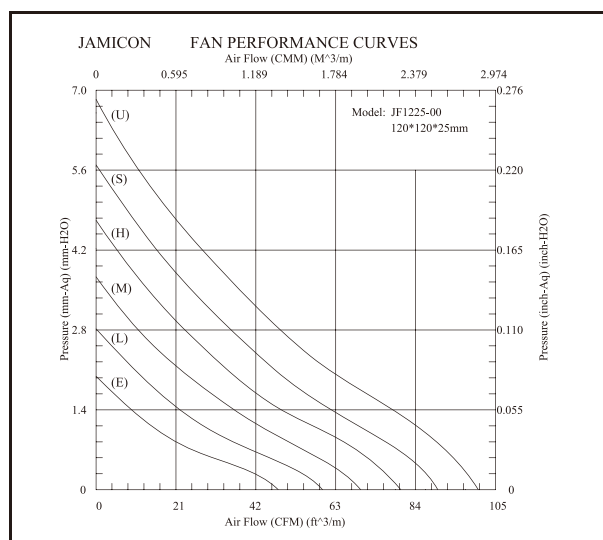

120X120X25 mm

KF1225-02 Series





- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : ±10%

SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
KF1225B1HRAD	B	12	10.2 ~ 13.8	97.83	0.181	2600	0.30	3.60	0.35	40.8	135
KF1225-1HR	B, H, S			81.17	0.126	2200	0.30	3.60	0.35	36.8	
KF1225-1M				66.28	0.091	1800	0.19	2.28	0.20	30.5	
KF1225-1L				56.29	0.064	1500	0.13	1.56	0.14	27.2	
KF1225-1E				46.79	0.049	1200	0.07	0.84	0.09	22.8	
KF1225-1V				37.23	0.033	1000	0.06	0.72	0.07	21.4	
KF1225B2HRAD	B			24	20.4~27.6	97.83	0.181	2600	0.20	4.80	
KF1225-2HR	B, H, S	81.17	0.126			2200	0.18	4.32	0.20	36.8	
KF1225-2M		66.28	0.091			1800	0.12	2.88	0.13	30.5	
KF1225-2L		56.29	0.064			1500	0.08	1.92	0.09	27.2	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".
Please contact us for detail if your request bearing system is not shown in the above list.

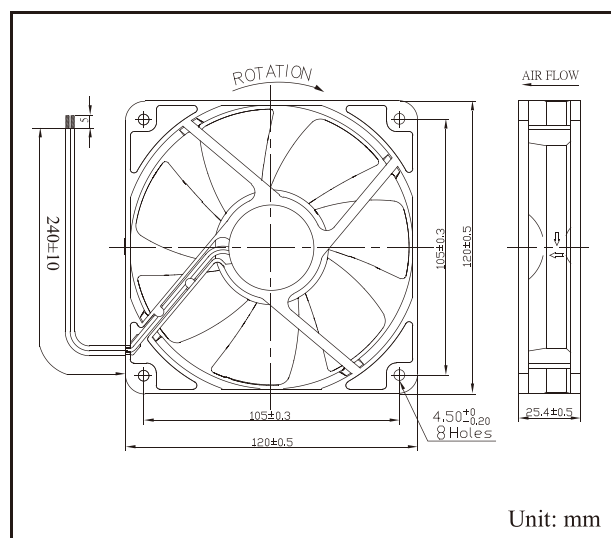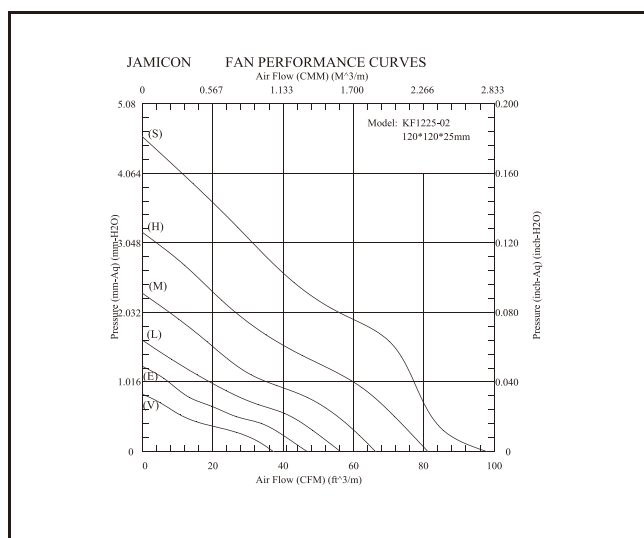

120X120X25 mm

KF1225-01 Series





- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$

SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
KF1225-1HR	B, H, S	12	10.2 ~ 13.8	80.49	0.141	2200	0.30	3.60	0.35	38.5	133
KF1225-1M				65.63	0.099	1800	0.19	2.28	0.20	32.5	
KF1225-1L				54.05	0.071	1500	0.13	1.56	0.14	27.4	
KF1225-1E				43.23	0.047	1200	0.07	0.84	0.09	21.4	
KF1225-1V				35.37	0.033	1000	0.06	0.72	0.07	15.5	
KF1225-2HR	B, H, S	24	20.4 ~ 27.6	80.49	0.141	2200	0.18	4.32	0.20	38.5	
KF1225-2M				65.63	0.099	1800	0.12	2.88	0.13	32.5	
KF1225-2L				54.05	0.071	1500	0.08	1.92	0.09	27.4	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM". Please contact us for detail if your request bearing system is not shown in the above list.

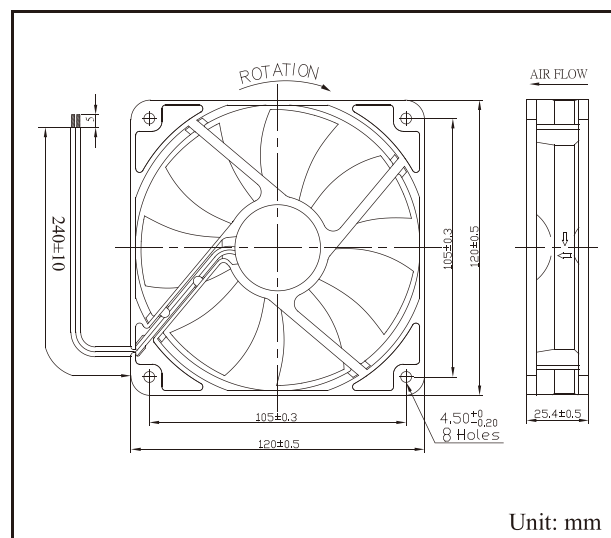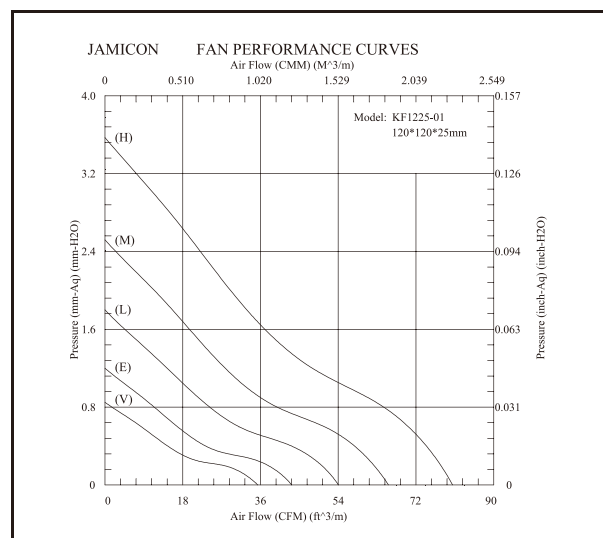

120X120X38 mm

JF1238-19 Series





- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$

SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
JF1238B1SR	B	12	10.2 ~ 13.8	135.8	0.356	3200	0.70	8.40	0.80	47.9	278
JF1238-1HR	B, S			118.7	0.281	2800	0.48	5.76	0.55	43.8	
JF1238-1MR	B, S			101.3	0.213	2400	0.32	3.96	0.38	39.1	
JF1238-1LR	B, S			84.5	0.155	2000	0.20	2.40	0.21	33.8	
JF1238-1ER	B, S			69.6	0.109	1700	0.10	1.20	0.11	29.6	
JF1238B2SR	B	24	20.4 ~ 27.6	135.8	0.356	3200	0.37	8.88	0.45	47.9	
JF1238-2HR	B, S			118.7	0.281	2800	0.31	7.44	0.32	43.8	
JF1238-2MR	B, S			101.3	0.213	2400	0.22	5.28	0.23	39.1	
JF1238-2LR	B, S			84.5	0.155	2000	0.13	3.12	0.14	33.8	
JF1238-2ER	B, S			69.6	0.109	1700	0.09	2.16	0.11	29.6	
JF1238B4SR	B	48	40.8 ~ 55.2	135.8	0.356	3200	0.20	9.60	0.22	47.9	
JF1238B4HR	B			118.7	0.281	2800	0.13	6.24	0.15	43.8	
JF1238B4MR	B			101.3	0.213	2400	0.09	4.32	0.11	39.1	
JF1238B4LR	B			84.5	0.155	2000	0.07	3.36	0.08	33.8	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM". Please contact us for detail if your request bearing system is not shown in the above list.

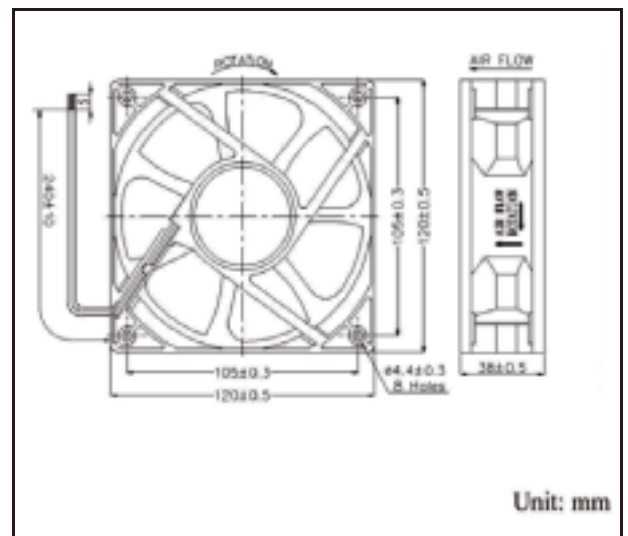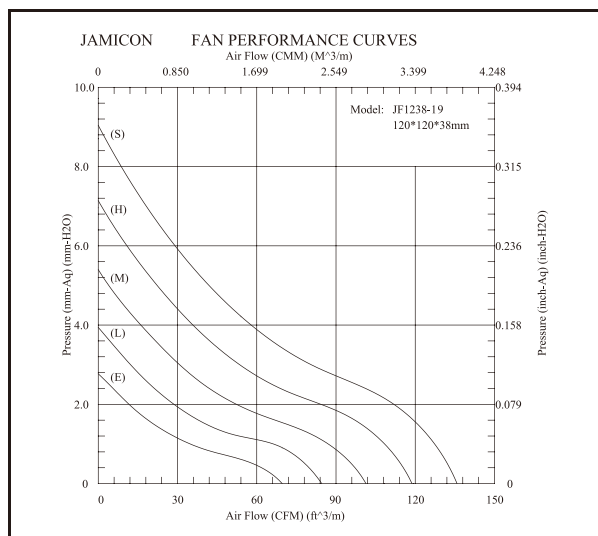

120X120X38 mm

JF1238-13 Series





- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$

SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
JF1238B1SR	B	12	10.2 ~ 13.8	135.8	0.356	3200	0.70	8.40	0.80	47.9	278
JF1238-1HR	B, S			118.7	0.281	2800	0.48	5.76	0.55	43.8	
JF1238-1MR				101.3	0.213	2400	0.32	3.96	0.38	39.1	
JF1238-1LR				84.5	0.155	2000	0.20	2.40	0.21	33.8	
JF1238-1ER				69.6	0.109	1700	0.10	1.20	0.11	29.6	
JF1238B2SR	B	24	20.4 ~ 27.6	135.8	0.356	3200	0.37	8.88	0.45	47.9	
JF1238-2HR	B, S			118.7	0.281	2800	0.31	7.44	0.32	43.8	
JF1238-2MR				101.3	0.213	2400	0.22	5.28	0.23	39.1	
JF1238-2LR				84.5	0.155	2000	0.13	3.12	0.14	33.8	
JF1238-2ER				69.6	0.109	1700	0.09	2.16	0.11	29.6	
JF1238B4SR	B	48	40.8 ~ 55.2	135.8	0.356	3200	0.20	9.60	0.22	47.9	
JF1238B4HR				118.7	0.281	2800	0.13	6.24	0.15	43.8	
JF1238B4MR				101.3	0.213	2400	0.09	4.32	0.11	39.1	
JF1238B4LR				84.5	0.155	2000	0.07	3.36	0.08	33.8	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM". Please contact us for detail if your request bearing system is not shown in the above list.

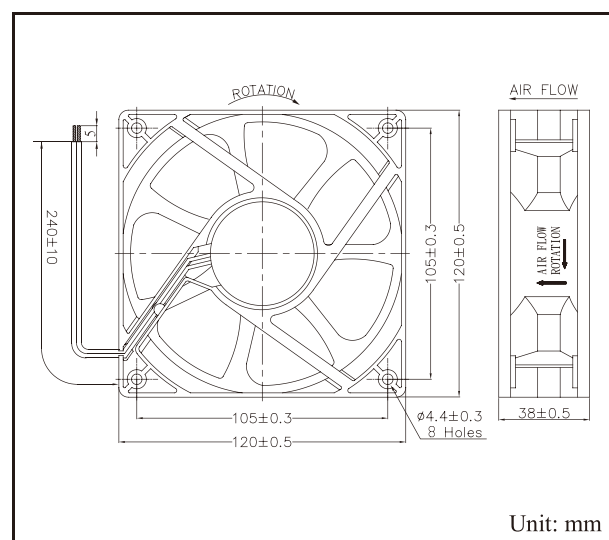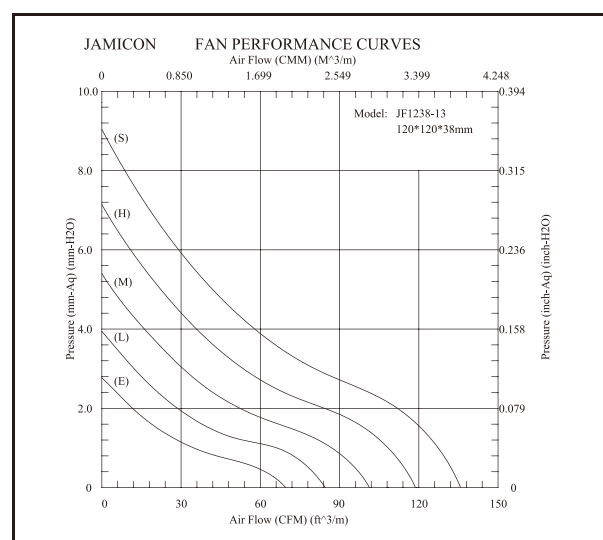

- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$





SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
JF1238B1TRAD	B	12	10.2 ~ 13.8	180.72	0.67	4400	1.46	17.52	1.50	56.20	307
JF1238B1TR				163.86	0.63	4000	1.33	15.96	1.50	52.90	
JF1238B1UR				144.13	0.50	3600	0.96	11.52	1.00	50.70	
JF1238B1SR				127.47	0.41	3200	0.76	9.12	0.80	46.70	
JF1238B1HR				110.59	0.32	2800	0.50	0.60	0.55	43.50	
JF1238B1MR				93.97	0.24	2400	0.35	4.20	0.38	40.20	
JF1238B1LR				79.96	0.18	2000	0.19	2.28	0.21	34.10	
JF1238B1ER				68.19	0.13	1700	0.10	1.20	0.11	28.60	
JF1238B2TR	B	24	20.4 ~ 27.6	163.86	0.63	4000	0.60	14.40	0.60	52.90	
JF1238B2UR				144.13	0.50	3600	0.43	10.32	0.46	50.70	
JF1238B2SR				127.47	0.41	3200	0.41	9.84	0.45	46.70	
JF1238B2HR				110.59	0.32	2800	0.30	7.20	0.32	43.50	
JF1238B2MR				93.97	0.24	2400	0.21	5.04	0.23	40.20	
JF1238B2LR				79.96	0.18	2000	0.12	2.88	0.14	34.10	
JF1238B2ER				68.19	0.13	1700	0.09	2.16	0.11	28.60	
JF1238B4TR	B	48	40.8 ~ 55.2	163.86	0.63	4000	0.28	13.44	0.32	52.90	
JF1238B4UR				144.13	0.50	3600	0.23	11.04	0.25	50.70	
JF1238B4SR				127.47	0.41	3200	0.21	10.08	0.22	46.70	
JF1238B4HR				110.59	0.32	2800	0.14	6.72	0.15	43.50	
JF1238B4MR				93.97	0.24	2400	0.09	4.32	0.11	40.20	
JF1238B4LR				79.96	0.18	2000	0.07	3.36	0.08	34.10	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".
Please contact us for detail if your request bearing system is not shown in the above list.

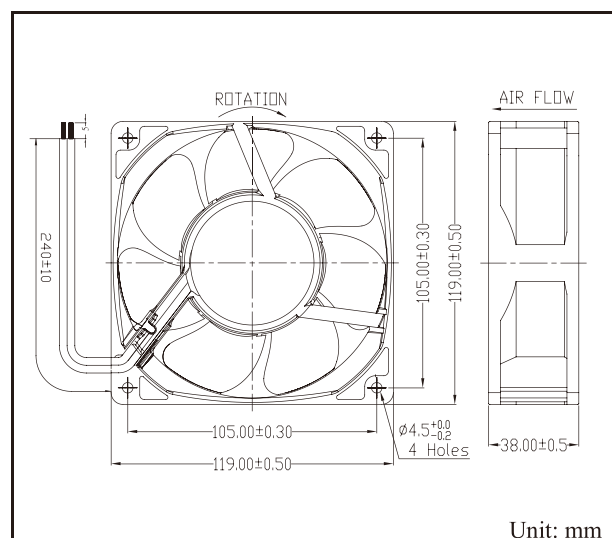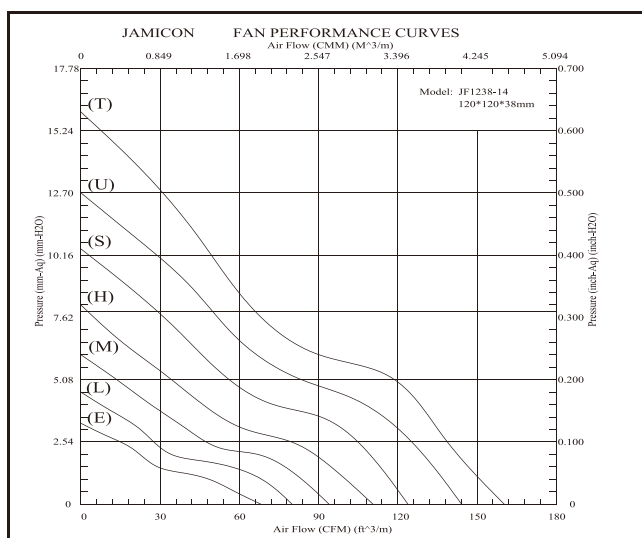

140X140X25 mm

JF1425-12 Series



- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$



SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
JF1425B1UR	B	12	10.2~13.8	156.48	0.194	2400	0.68	8.16	0.80	45.60	220
JF1425B1SR				131.38	0.140	2100	0.48	5.76	0.60	41.70	
JF1425-1HR	B, S			113.56	0.104	1800	0.36	4.32	0.44	37.10	
JF1425-1M				93.16	0.080	1500	0.21	2.52	0.25	32.10	
JF1425-1L				73.95	0.047	1200	0.13	1.56	0.18	26.50	
JF1425-1E				53.92	0.030	900	0.07	0.84	0.11	20.40	
JF1425B2UR	B	24	20.4~27.6	156.48	0.194	2400	0.36	8.64	0.38	45.60	
JF1425B2SR				131.38	0.140	2100	0.24	5.76	0.26	41.70	
JF1425-2HR	B, S			113.56	0.104	1800	0.23	5.52	0.27	37.10	
JF1425-2M				93.16	0.080	1500	0.14	3.36	0.17	32.10	
JF1425-2L				73.95	0.047	1200	0.10	2.40	0.13	26.50	
JF1425-2E				53.92	0.030	900	0.06	1.44	0.09	20.40	

SPECIFICATIONS

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM". Please contact us for detail if your request bearing system is not shown in the above list.

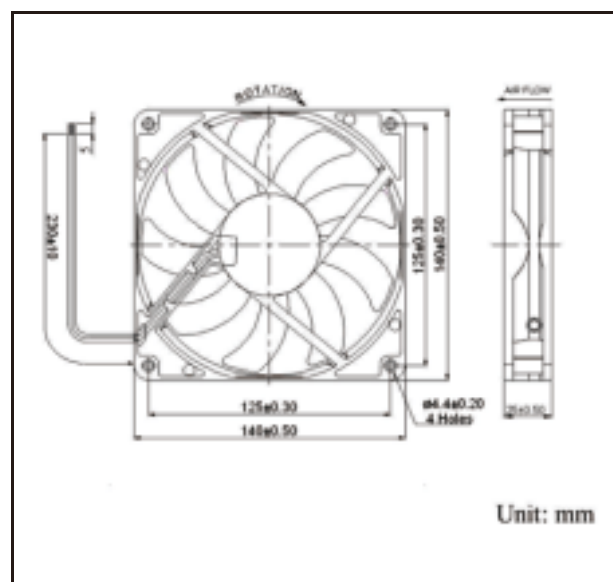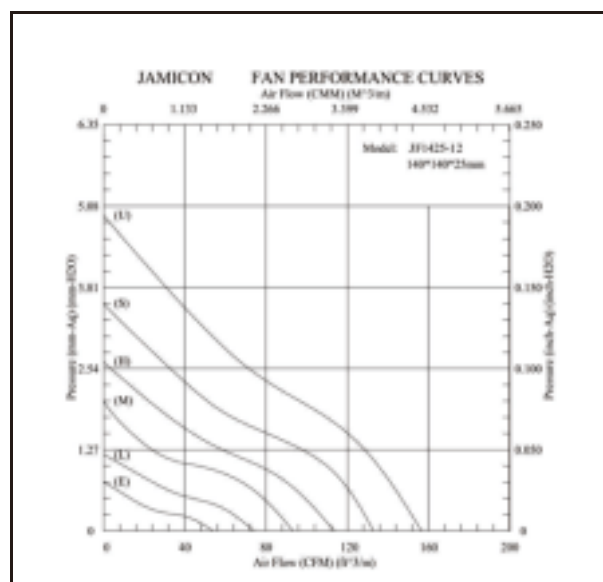

140X140X25 mm

JF1425-01 Series





- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$

SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
JF1425B1UR	B	12	10.2~13.8	156.48	0.194	2400	0.68	8.16	0.80	45.60	220
JF1425B1SR				131.38	0.140	2100	0.48	5.76	0.60	41.70	
JF1425-1HR	B, S			113.56	0.104	1800	0.36	4.32	0.44	37.10	
JF1425-1M				93.16	0.080	1500	0.21	2.52	0.25	32.10	
JF1425-1L				73.95	0.047	1200	0.13	1.56	0.18	26.50	
JF1425-1E				53.92	0.030	900	0.07	0.84	0.11	20.40	
JF1425B2UR	B	24	20.4~27.6	156.48	0.194	2400	0.36	8.64	0.38	45.60	
JF1425B2SR				131.38	0.140	2100	0.24	5.76	0.26	41.70	
JF1425-2HR	B, S			113.56	0.104	1800	0.23	5.52	0.27	37.10	
JF1425-2M				93.16	0.080	1500	0.14	3.36	0.17	32.10	
JF1425-2L				73.95	0.047	1200	0.10	2.40	0.13	26.50	
JF1425-2E				53.92	0.030	900	0.06	1.44	0.09	20.40	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM". Please contact us for detail if your request bearing system is not shown in the above list.

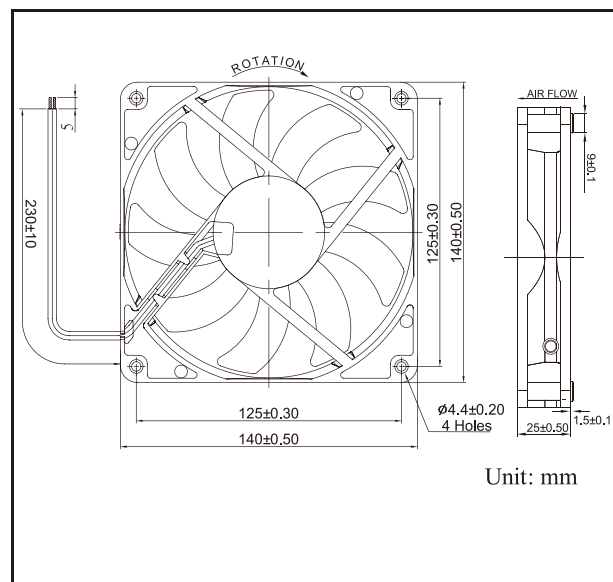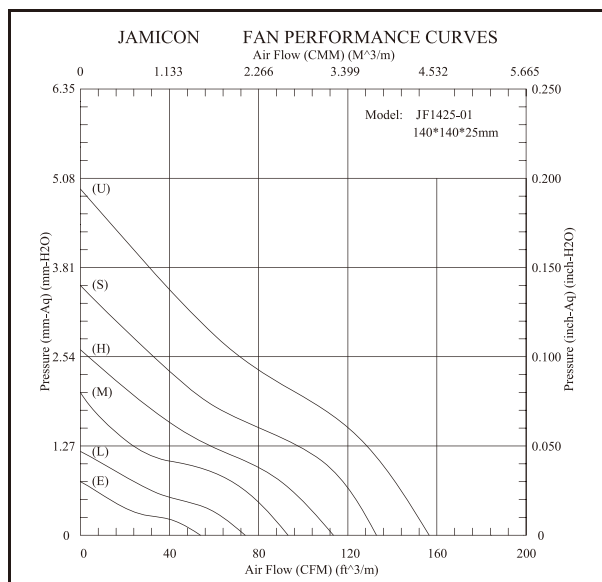

140X140X25 mm

KF1425-11 Series

- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$





SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)		
KF1425B1TR	B	12	10.2 ~ 13.8	125.61	0.233	2800	0.54	6.48	0.65	46.4	176		
KF1425B1UR				112.14	0.193	2500	0.48	5.76	0.58	43.4			
KF1425B1SR				104.41	0.147	2300	0.41	4.92	0.49	40.0			
KF1425-1H	B, S			89.04	0.139	2000	0.28	3.36	0.34	36.2			
KF1425-1M				80.92	0.106	1800	0.20	2.40	0.24	32.6			
KF1425-1L				70.83	0.074	1600	0.15	1.80	0.18	29.7			
KF1425-1E				53.50	0.045	1200	0.08	0.96	0.10	21.1			
KF1425-1V				46.01	0.036	1000	0.06	0.72	0.07	17.1			

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM". Please contact us for detail if your request bearing system is not shown in the above list.

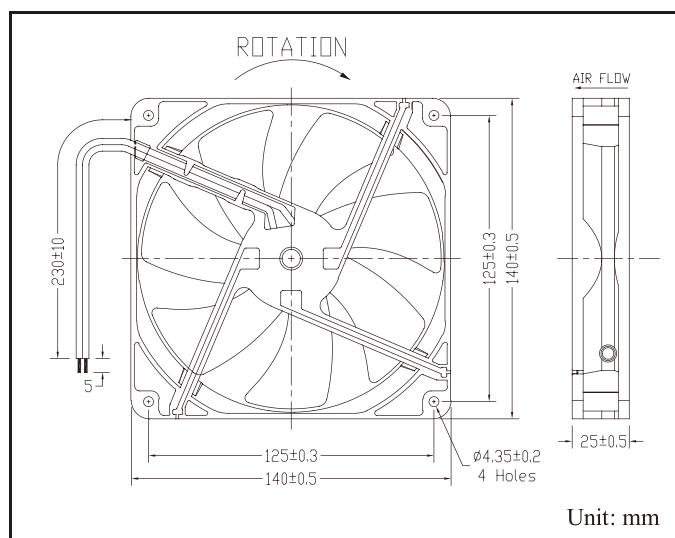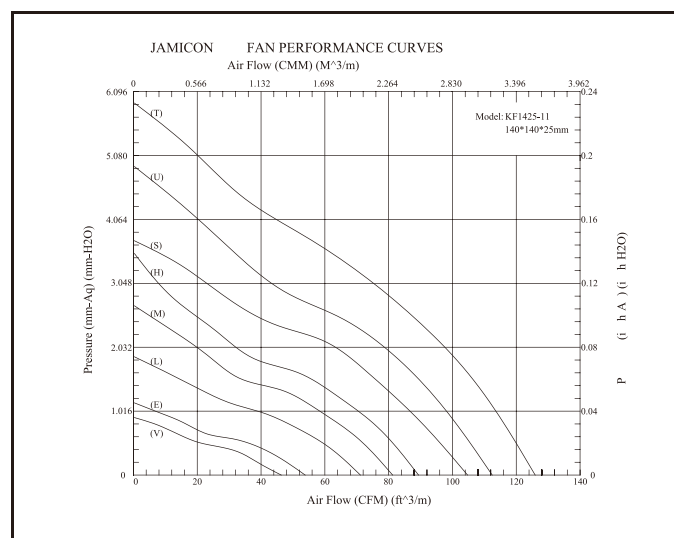

200X200X30 mm

DF2030-11 Series



- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$

SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Power (Watt)	Noise (dBA)	Weight (g)
DF2030-1HR	B,S H,F	12	10.2~13.8	148.66	0.095	1200	0.60	7.20	7.20	31.6	300
DF2030-1MR				118.52	0.072	900	0.42	5.04	5.04	25.3	
DF2030-1LR				86.66	0.046	700	0.30	3.60	3.60	21.8	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page “PART NUMBER SYSTEM”. Please contact us for detail if your request bearing system is not shown in the above list.

