

HS-1606A


Magnetic Buzzer

- Self Drive



Rated Voltage(VDC)	6
Operating Voltage(VDC)	4 ~ 8
CurrentConsumption Max (mA)	40
SPL Min. (dB) at 10cm	85
Resonant Frequency(Hz)	2300±300
Operating Temperature(°C)	-20~+70
Storage Temperature(°C)	-30~+80
Tone	Continuous Sound
Material	PPO

Shape

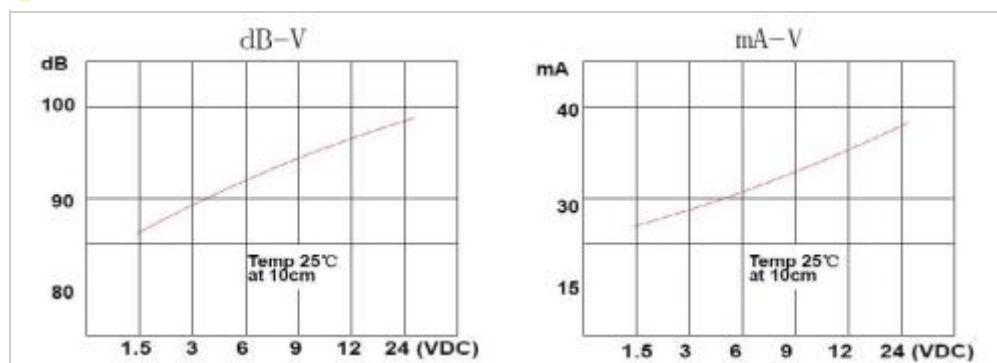

Dimension

