
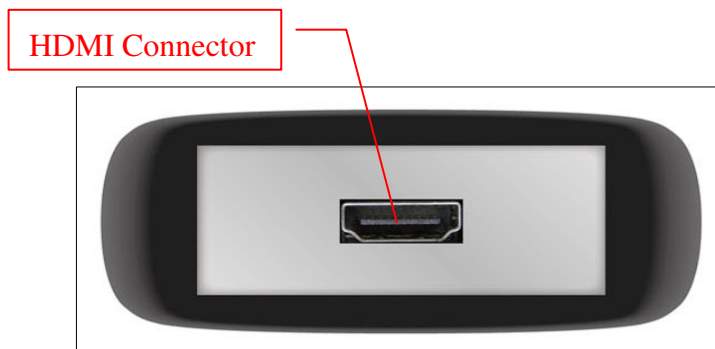


HDMI Cable Tester

TCT-320

User Manual

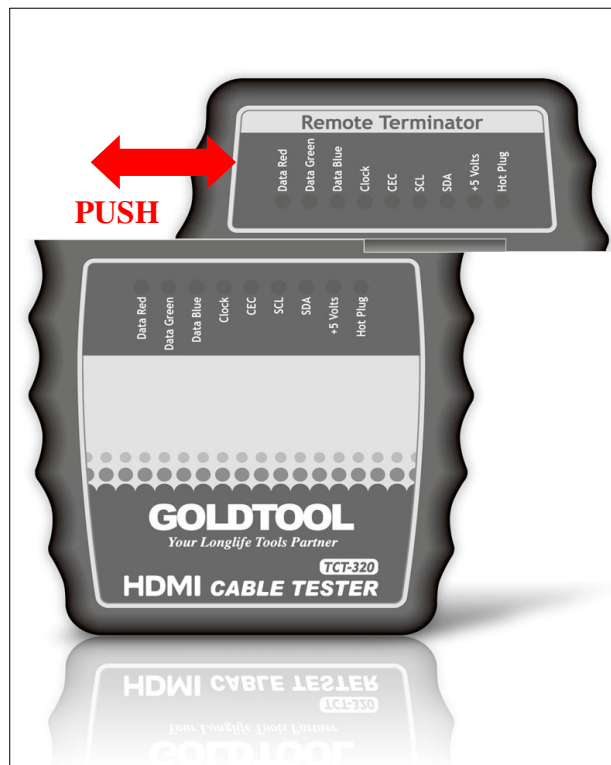

Introduction	2
Features	2
Specifications	3
Instructions for Operation	3
Test Result	3
Caution	3

HDMI Cable Tester

TCT-320

Introduction

The HDMI (High Definition Multimedia Interface) Cable tester is designed to check and troubleshoot the pin connections of HDMI cables. It is ideal for testing the continuity of each pin of an HDMI cable prior to installation on equipments.

Features

Test all signal pin of HDMI cables
LED indicator on both main unit and remote unit
Automatic "on" and easy to operate

LED	LED Name	HDMI PIN	Signal
1	Data Red	1	TMDS Data2+
		2	TMDS Data2 Shield
		3	TMDS Data2-
2	Data Blue	4	TMDS Data1+
		5	TMDS Data1 Shield
		6	TMDS Data1-
3	Data Green	7	TMDS Data0+
		8	TMDS Data0 Shield
		9	TMDS Data0-
4	Clock	10	TMDS Clock+
		11	TMDS Clock Shield
		12	TMDS Clock-
5	CEC	13	CEC
		14	Reserved (N.C. on device)
6	SCL	15	SCL
7	SDA	16	SDA
		17	DDC/CEC Ground
8	+5 Volts	18	+5V
9	Hot Plug	19	Hot Plug Detect

Goldtool HDMI Cable Tester

TCT-320

Specification

Port Type : HDMI (A)

Accessory : 9V battery

Instructions for Operation:

- 1) Install a 9 V battery into the master unit which power will be supply automatically.
- 2) Connect one end of the HDMI Cable to the master unit, and the other end to the remote unit .

Test Result:

- 1)If all 9 LEDs are lit up, the cables are defined as pass.
- 2)If any LED do not light up, the inner pin of the corresponding signal is defined as failed.

CAUTIONS:

*Please do not attach to the live circuit, or it might be caused the permanently damage to the tester.