



尺寸 Size: 80mm × 80mm × 38mm
 风量 Airflow: 22–28CFM
 重量 Weight: 275g
 噪音 Noise: 26–32dB(A)
 风叶 Impeller Material: PBT UL94–V0 Reinforced Plastic
 外框 Frame: Aluminum Alloy
 端子 Terminals: 0.5mm
 引线 Lead Wire: AWG#22 UL 1569(Optional)
 马达 Motor: Shaded Pole Induction Motor
 温度范围 Operating Temperature: –10°C~+65°C

产品型号 Model	轴承型式 Bearing System	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	噪音 Noise dB(A)	风量 Air Flow CFM	相数 Phase	电容 Capacitor μF/VAC
G8038HA ₁ S	Sleeve	100/125	50/60	0.2	9.5/7	2550/3100	28/32	23/28	1	/
G8038HA ₂ S		200/240	50/60	0.06/0.05	9.5/7	2550/3100	28/32	23/28	1	/
G8038HA ₁ B	Ball	100/125	50/60	0.2	9.5/7	2550/3100	28/32	23/28	1	/
G8038HA ₂ B		200/240	50/60	0.06/0.05	9.5/7	2550/3100	28/32	23/28	1	/
G8038MA ₁ S	Sleeve	100/125	50/60	0.13	9/7	2300/2700	26/30	22/26	1	/
G8038MA ₂ S		200/240	50/60	0.065	7/6	2300/2700	26/30	22/26	1	/
G8038MA ₁ B	Ball	100/125	50/60	0.13	9/7	2300/2700	26/30	22/26	1	/
G8038MA ₂ B		200/240	50/60	0.065	7/6	2300/2700	26/30	22/26	1	/

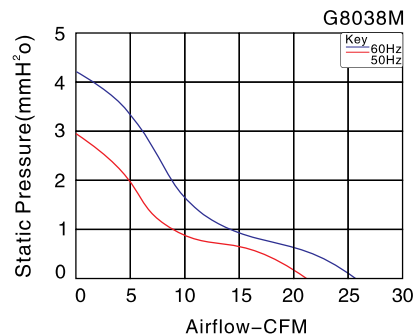

Fan Accessories

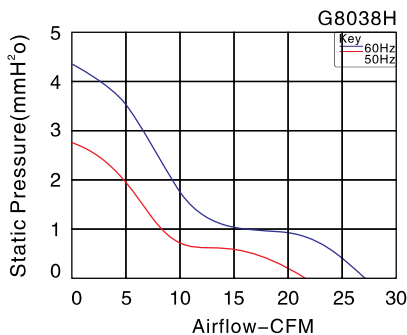