


PANEL CUT-OUT

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	12.90~13.10	18.9~19.1
1.25~2.00	12.90~13.10	19.1~19.2
2.00~3.00	12.90~13.10	19.3~19.4

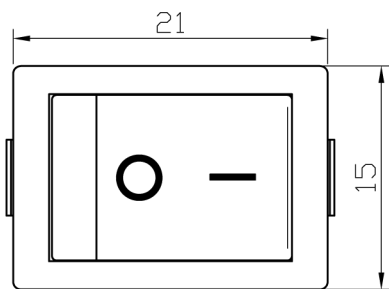

NOTES:

1.Rating:

CQC 6A 250V AC  
6(8)A 250VAC  
8A/128A 250VAC T105/55

cUL 10GPA 125V AC  
6GPA 250V AC

TV-5 T105/55  
VDE ENEC 6(4)A 250V AC T85/55  
KC 6(4)A 250V AC T85/55  
TUV 8/128A 250VAC T85/55

2.Circuit Diagram:4P ON-OFF

3.Terminal Strength:≥80N


4.Electrical life:≥10000 cycles

5.Withstand Voltage:Withstand Voltage:1500VAC 1min  
Terminals to Button:3000VAC 1min  
Leakage Current:1mA

6.Current resistance:≤50mΩ(initial)

7.Insulation resistance:≥100MΩ

8.Body Materil:NYLON 66 94V-0~2



A4				
A3				
A2				
A1				
REV.	DATE	REVISION DESCRIPTION	ISSUE	

普通公差:

COMMON TOLERANCE:

UP TO 5	±0.20
ABOVE 5 TO 30	±0.30
ABOVE 30	±0.50
ANGULAR	±5°

单位 UNIT	mm
绘图 DRAWN BY	周金勇
日期 DATE	2015.07.27

温州港源电子有限公司

Wenzhou Gangyuan Electronics Co Ltd.

投影 PROJECTED	品名 PRODUCT NAME
核对 CHECKED BY	型号 MODEL NO.
核准 APPROVAL BY	图号 DWG NO.

跷板开关	比例 SCALE	Free
RS601D1-201A011G1B-ZP		
.....		