
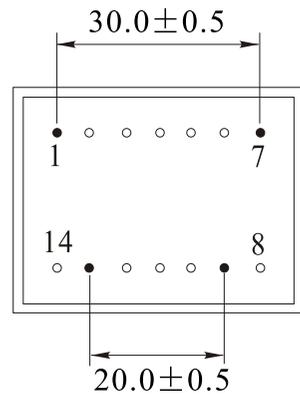



Rev.	Description	Date
A0	New release	2022.10.12

1. PHYSICAL CHARACTERISTICS (mm)

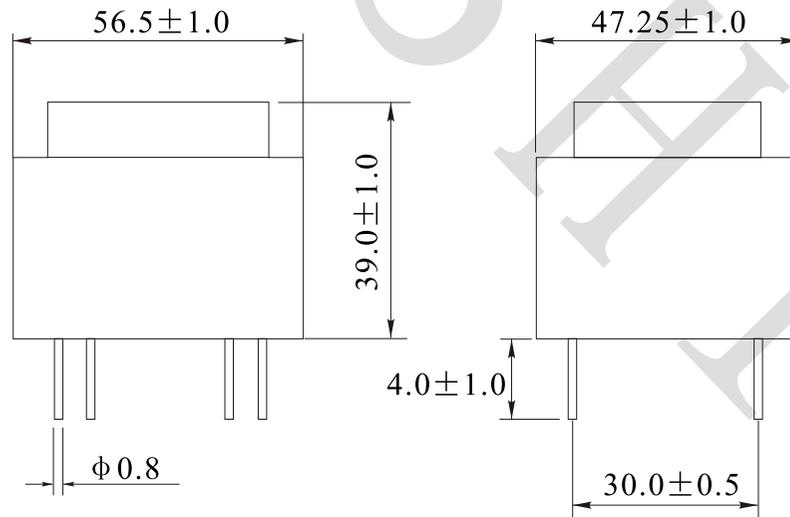

Bottom view

Top marking




NOTES:

Temp 20°C 48%RH
RoHS Compliant

The Document property belong to SHINHOM & is not allowed to be duplicated without authorization

2. ELECTRONICAL SCHEMATIC

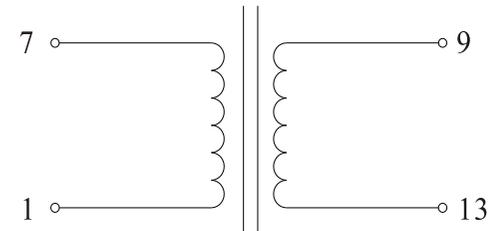

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V, 50Hz-60Hz
 Sec load voltage: 15.0V ± 5%V @ 1067mA
 No load voltage: 18.4Vac ± 5%V @ 35mA
 Output Power: 16VA
 Hi-Pot: 3500V, 50Hz, 1mA, 10S Pri to Sec

Note:

- Solderability: leads shall meet MIL-STD-202, Method 208D for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: >28%

NAME:	Power Transformer		
CUSTOMER P/N:	BV EI 541 1125	DATE:	2022-10-12
SHINHOM P/N:	PE541804	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	



SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD