

### SPECIFICATION

Current Rate:3 AMP  
Insulation Resistance:1000M  $\Omega$  Min.  
Contact Resistance:20m  $\Omega$  Max.  
Dielectric Voltage:1000V AC for one minute  
Operation Temperature:-40°C to +105°C





Standart height (H) = 2.5

### MATERIAL

Insulator:Polyester,UL 94V-0  
Standard:PBT or Nylon 6T  
Contact Pin:Copper Alloy  
Contact Plating:Gold Flash all over

## PLH-xx






Pin Header 2.54mm 1 Row H=1.5/1.7/2.5mm Stack Straight Type

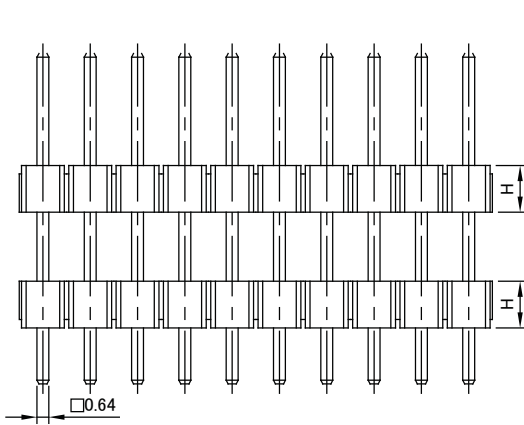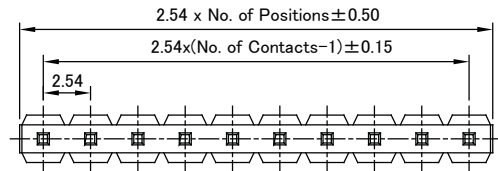

Recommended PCB Layout  
(PCB TOLERANCE  $\pm 0.05$ )

## PLHD-xx

Pin Header 2.54mm 2 Row H=1.5/1.7/2.5mm Stack Straight Type

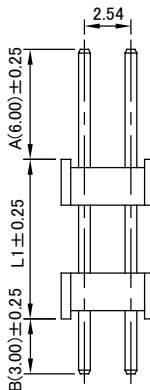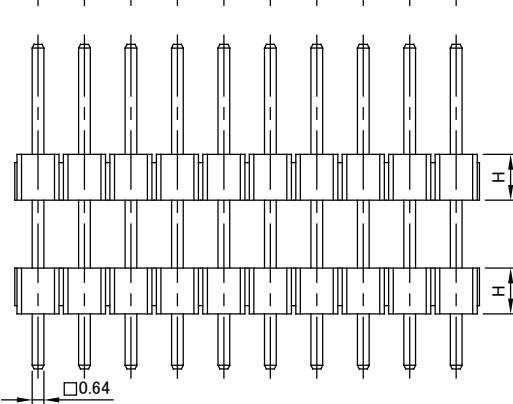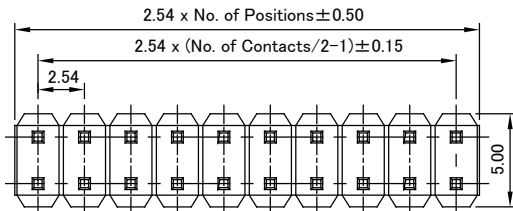

Recommended PCB Layout  
(PCB TOLERANCE  $\pm 0.05$ )