
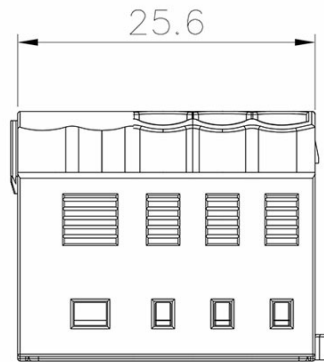


Category: 直插式配电块/Plug-in terminal-plug

Product name: TPA6/2.5-7-GY

Product Description: 标称工作电压: 450 V , 额定电流: 41A/24A 接线位数 : 7 ; 直插式弹簧连接

Product Picture

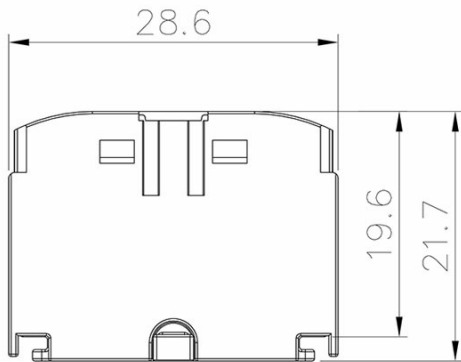

基本信息 /Basic Information

产品型号 SUPU ID	TPA6/2.5-7-GY
接线位数 Number of connections	7
产品层数 Number of levels	1
电位 Potentials	1
接线方式 Connection method	直插弹簧接线
防护等级 Protection Level	IP20

工作温度 Work temperature	-40~+105°C
--------------------------	------------

IEC数据 /IEC Data

接入端/Feed-in

额定电流 Rated Current	41A
-----------------------	-----

额定电压 Rated Voltage	450V
-----------------------	------

过压类别 Overvoltage category	III
------------------------------	-----

污染等级 Pollution degree	3
--------------------------	---

额定冲击电压 Rated impulse voltage	6KV
---------------------------------	-----

刚性导线截面积 Conductor cross section solid	0.5-10mm ² (20-8)
--	------------------------------

柔性导线截面积 Conductor cross section flexible	0.2-6mm ² (20-8)
---	-----------------------------

柔性导线截面积，带绝缘管套 Conductor cross section flexible,with furrule	0.2-6mm ² (20-8)
--	-----------------------------

剥线长度 Stripping length	10-12mm
--------------------------	---------

分线端/Load connection

额定电流 Rated Current	24A
-----------------------	-----

额定电压 Rated Voltage	450V
-----------------------	------

过压类别 Overvoltage category	III
------------------------------	-----

污染等级 Pollution degree	3
--------------------------	---

额定冲击电压 Rated impulse voltage	6KV
---------------------------------	-----

刚性导线截面积 Conductor cross section solid	0.2-4mm ² (26-12)
--	------------------------------

柔性导线截面积 Conductor cross section flexible	0.2-2.5mm ² (26-12)
---	--------------------------------

柔性导线截面积，带绝缘管套 Conductor cross section flexible,with furrule	0.2-2.5mm ² (24-12)
--	--------------------------------

剥线长度 Stripping length	8-10mm
--------------------------	--------

UL数据 /UL Data

接入端/Feed-in

使用组别 Use group	B	C	D
额定电流 Rated Current	50A	50A	
额定电压 Rated Voltage	300V	300V	
额定接线容量 Rated cross section	20-8AWG	20-8AWG	

分线端/Feed-in

使用组别 Use group	B	C	D
额定电流 Rated Current	20A	20A	
额定电压 Rated Voltage	300V	300V	
额定接线容量 Rated cross section	26- 12AWG	26- 12AWG	

材料信息 /Material Data

绝缘材料 Insulation material	PA66
绝缘材料组别 Insulation material group	I
阻燃等级，符合UL94 Flame retardant grade, UL94 compliance	V0
导体材料 Contact material	铜合金/Copper alloy
导体表面镀层 Surface characteristics	镀锡/Sn Plated

产品认证 /Product Certification

认证图标
Certificate



UL证书号
UL file No.

VDE证书号
VDE No.

TUV证书号
TUV No.

Ningbo Supu Electronics Co.,Ltd

Zip code: 315303

Fax: +86 574-63288170

E-mail : askme@supu.cn

Address: No. 625, Kandun Town Street, Cixi
City, Zhejiang Province

Switchboard: +86 574-63288158

E-mail : askme@supu.cn

Service Hotline: 400-626-6336



Code

File date : 2024-09-13 15:03

Product Entry : 2024-04-16

The right to modify data belongs to
Supu.