
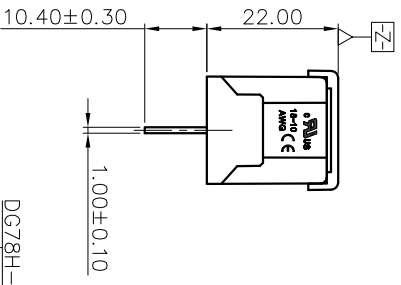
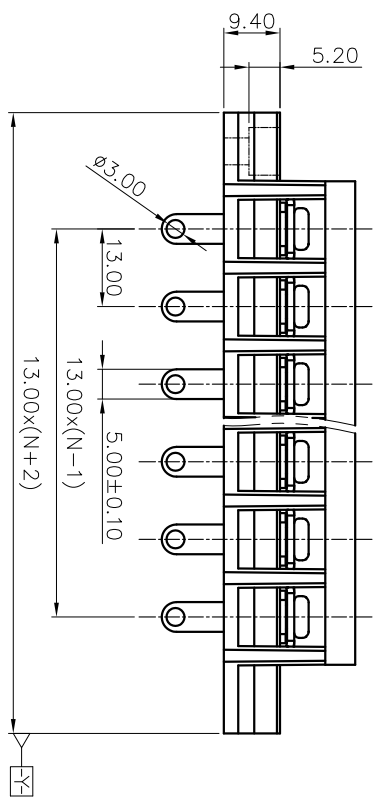



REVISION RECORD			
REV	EQN	DESCRIPTION	DATE

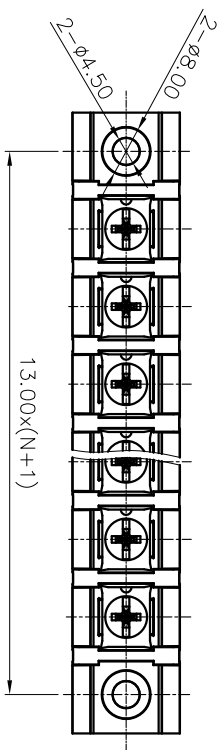



NOTES1:
UL Standard
1. Rated voltage/current : 600V / 40A
2. Torque value : M4 , 10.53lb.in
3. Wire range : 18~10AWG

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 13.00mm, Poles : N=02~18P
3. Stripping length : 8~9mm
4. Withstanding voltage : AC2200V/1min
5. Operating temperature : -40°C~+105°C
6. Undimensioned tolerances:

Pitch	mm		in		Nominal dimension range	mm	in
	Over	To	Over	To			
6	Over	To	Over	To	30	Over	To
10	Over	To	Over	To	60	Over	To
24	Over	To	Over	To	100	Over	To
30	Over	To	Over	To	150	Over	To
60	Over	To	Over	To	150	Over	To
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
						±2°	±2°

7. RoHS Compliance

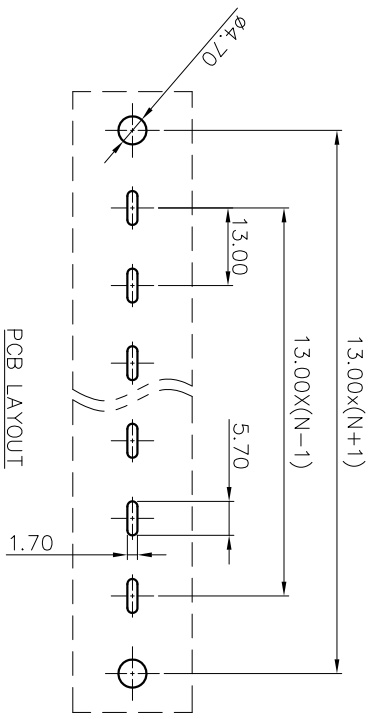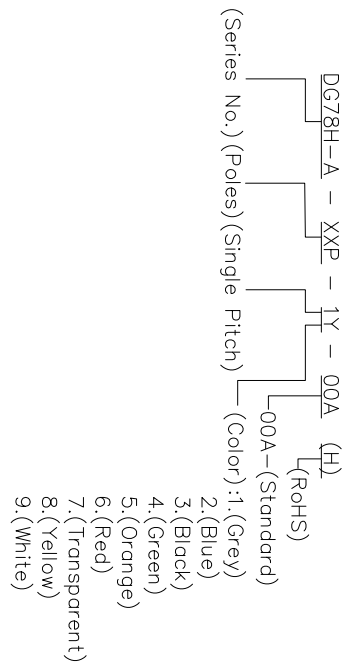

PCB LAYOUT

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON [®] NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	CHKD:	/
DRTT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		MM (INCH)	DO NOT SCALE DRAWING
		SCALE	1:1