

DSPV, DSHP Series Dip Switches Half Pitch 1.27mm, SMD Type

SPECIFICATION:


1. Non-switching rating : 100mA 50V DC.
2. Switching rating : 25mA 24V DC.
3. Contact resistance : 50mΩ Max.(initial)
4. Insulation resistance : 100MΩ Min at 500V DC.
5. Withstand voltage : 500V AC for 1 minute.

6. Mechanical life : 2,000 Cycles Min.
7. Operating force : 1,000g Max.
8. Material pad : Nylon UL-94V-0.
9. Material cover : PPS UL-94V-0.
10. Terminal : Brass with gold plated.

HOW TO ORDER


| MODEL NO. | + | POSITION | - | ACTUATOR (HANDLE) | + | TERMINAL SHAPE | + | FINISH | + | PACKING |
|--|---|---------------------------------------|---|--|---|--|---|---------------------|---|----------------------|
| DSPV : Tiny piano DSHP : 1.27mm pitch SMD type | | 02 : 2 positions 12 : 12 positions | | L : Extension (for DSPV only) S : Low profile W/O tape] (for DSHP only) T : Tape sealed | | H : Straight terminal (for DSPV only) S : SMD type terminal | | GE : 4μ Gold plated | | R : Reel T : Tube |

DSPV SERIES

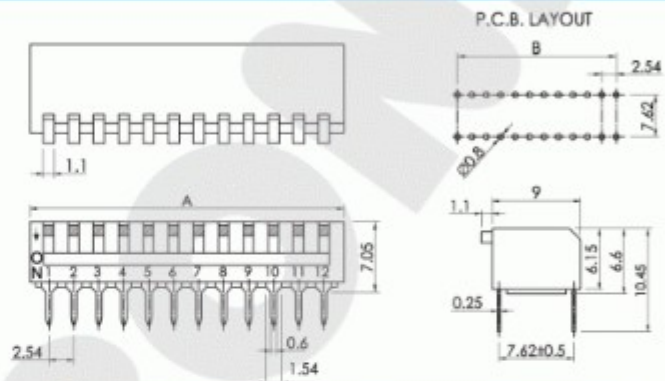


| Positions NO. | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | |
|---------------|----|------|------|-------|-------|-------|-------|-------|-------|-------|-------|
| A | mm | 6.48 | 9.02 | 11.56 | 14.10 | 16.64 | 19.18 | 21.72 | 24.26 | 26.80 | 31.88 |
| B | mm | 2.54 | 5.08 | 7.62 | 10.16 | 12.70 | 15.24 | 17.78 | 20.32 | 22.86 | 27.94 |

DSPV SERIES

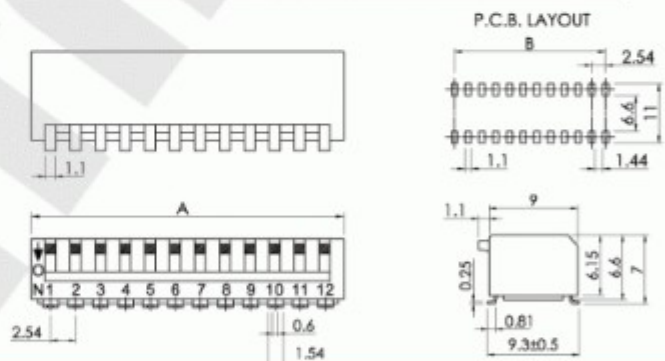

500 PCS/REEL

DSHP SERIES Half pitch 1.27mm

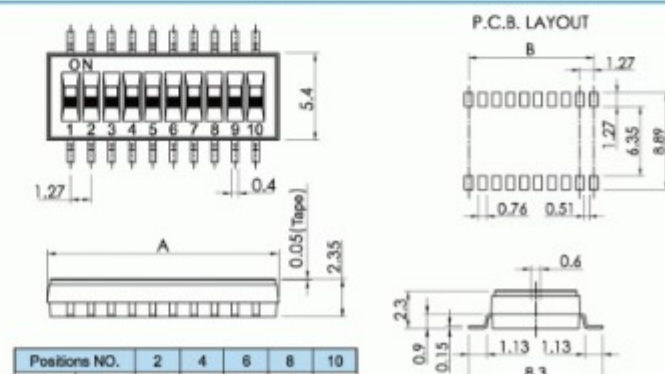

| Positions NO. | 2 | 4 | 6 | 8 | 10 | |
|---------------|----|------|------|------|-------|-------|
| A | mm | 4.14 | 6.68 | 9.22 | 11.76 | 14.30 |
| B | mm | 1.27 | 3.81 | 6.35 | 8.89 | 11.43 |

2000 PCS/REEL