

TERMINAL BLOCK Connector

SMD Terminal Block

KLS2-L13 Thru-Hole Poke-In Wire Lighting Terminal Block

Material:

Contact Material: Copper Alloy, Tin

Housing Material: UL 94V-0 Liquid Crystal Polymer (LCP)

Technical parameters:

Rated voltage: 320V


Maximum current: 9A

Cross section: 0.2-0.75 mm²

Wiring method: fine-stranded

Cross section: 24-118 AWG

Working temperature: -40°C ~ +105°C

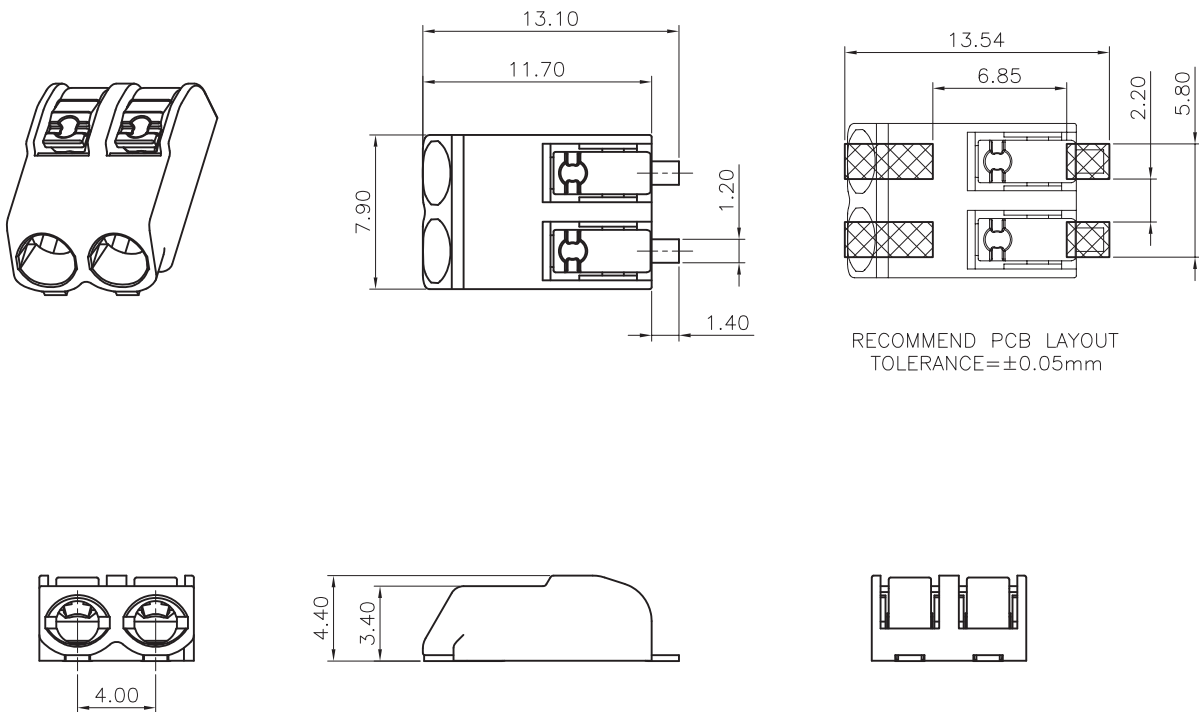

ORDER INFORMATION

Product NO.: KLS2-L13-02P

Pos. NO.
SMD Terminal Block

Pin Number:
01Pins, 02Pins, 03Pins