


# WH1602L1 Character 16x2

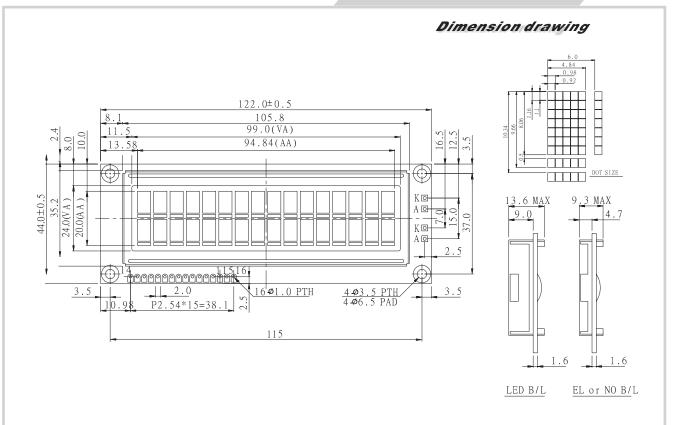

#### Feature

- 1.5x8 dots includes cursor
- 2.Built-in controller (ST 7066 or Equivalent
- 3.+5 power supply (Also available for +3V)
- 4.1/16 duty cycle
- 5.LED can be driven by pin1, pin2, pin15, pin16, or A and K
- 6.Optional:smaller character size (2.95x4.35mm)
- 7. WG16032D: Chinese version

Pin NO.	Symbol	Function
1	Vss	GND
2	Vdd	+3V or + 5V
3	Vo	Contrast Adjustment
4	RS	H/L Register select signal
5	R/W	H/L Read / write signal
6	E	H→L Enable signal
7	DB0	H/L Data bus line
8	DB1	H/L Data bus line
9	DB2	H/L Data bus line
10	DB3	H/L Data bus line
11	DB4	H/L Data bus line
12	DB5	H/L Data bus line
13	DB6	H/L Data bus line
14	DB7	H/L Data bus line
15	A/Vee	+4.2V for LED(RA=0 $\Omega$ )/Negative Voltage output
16	К	Power supply for B/L (0V)

#### Mechanical Data

Item	Standard Value	Unit	
Module Dimension	122.0x44.0	mm	
Viewing Area	99.0x24.0	mm	
Mounting hole	115x 37.0	mm	
Character Size	4.84x9.66	mm	

#### Absolute Maximum Rating

14	Cumphal	Stan	11			
Item	Symbol	min.	typ.	max.	Unit	
Power Supply	VDD-VSS	-0.3		7.0	V	
Input Voltage	VI	-0.3		VDD	V	

Note: VSS=0 Volt, VDD=5.0 Volt.

### Electronical Characteristics

Item	Cumbal	Cond	dition	Stan							
item	Symbol	Conc	ווטווג	min.	typ.	max.	Unit				
Input Voltage	VDD	VDD:	=+5V	4.7	5.0	5.3	V				
Supply Current	IDD	VDD	)=5V		1.6	1.5	mΑ				
		-20	ာိင			5.2					
Recommended LC Driving		0°	'C			4.5					
Voltage for Normal Temp.	VDD-V0	25°C 50°C		4.2	4.2		v				
Version module				3.8							
		70	°C	3.5							
LED Forward Voltage	VF	25°C		25°C		25°C			4.2	4.6	V
LED Forward Current	IF	25°C	Array		260	520					
EL Power Supply Current	IEL	Vel=110VAC;400Hz		Vel=110VAC;400Hz		Vel=110VAC;400Hz				5.0	mA

## Display Character Address Code:

Display position					7	8	9	10	11	12	13	14	15	16
DD RAM Address	00	01												01
DD RAM Address	40	41												41



туре