




尺寸 Size: 80mm × 80mm × 25mm  
 风量 Airflow: 19–23CFM  
 重量 Weight: 260g  
 噪音 Noise: 23–26dB(A)  
 风叶 Impeller Material: PBT UL94–V0 Reinforced Plastic  
 外框 Frame: Aluminum Alloy  
 端子 Terminals: 0.5mm  
 引线 Lead Wire: AWG#22 UL 1569(Optional)  
 马达 Motor: Shaded Pole Induction Motor  
 温度范围 Operating Temperature: –10°C~+65°C



产品型号 Model	轴承型式 Bearing System	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	噪音 Noise dB(A)	风量 Air Flow CFM	相数 Phase	电容 Capacitor μF/VAC
G8025HA <sub>1</sub> S	Sleeve	100/125	50/60	0.15	15/12	2300/2750	26/23	19/23	1	/
G8025HA <sub>2</sub> S		200/240	50/60	0.09	15/12	2300/2750	26/23	19/23	1	/
G8025HA <sub>1</sub> B	Ball	100/125	50/60	0.15	15/12	2300/2750	26/23	19/23	1	/
G8025HA <sub>2</sub> B		200/240	50/60	0.09	15/12	2300/2750	26/23	19/23	1	/

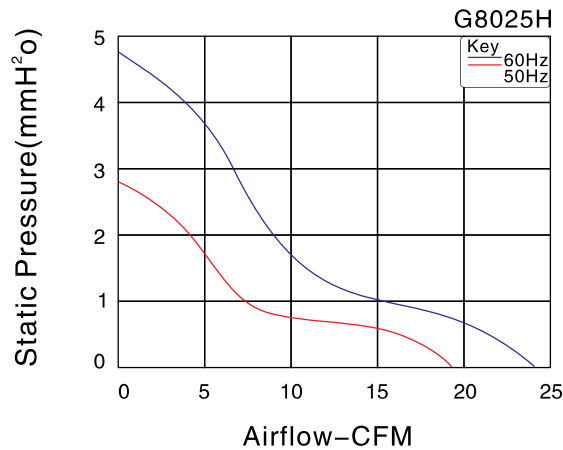

Fan Accessories



本样册仅供参考, 具体以说明书为准。  
 This sample book is for reference only. Please refer to the specification for details.  
 如蒙特殊电压, 电可相提, 请提供。本公司保留技术改动的权利。  
 Special voltage may be provided, necessary according to the inquiry. All technical modifications are reserved.