




尺寸 Size: 160mm × 160mm × 62mm
 风量 Airflow: 220–275CFM
 重量 Weight: 1200g
 噪音 Noise: 50–59dB(A)
 风叶 Impeller Material: PBT UL94–V0 Reinforced Plastic
 外框 Frame: Aluminum Alloy
 端子 Terminals: 0.5mm
 引线 Lead Wire: AWG#22 UL 1569(Optional)
 马达 Motor: Capacitor–Run Induction Motor
 温度范围 Operating Temperature: $-10^{\circ}\text{C} \sim +65^{\circ}\text{C}$

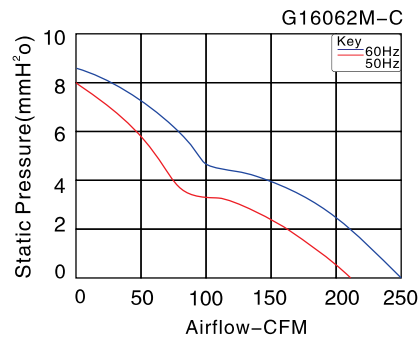

产品型号 Model	轴承型式 Bearing System	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	噪音 Noise dB(A)	风量 Air Flow CFM	相数 Phase	电容 Capacitor $\mu\text{F/VAC}$
G16062HA,B-C-7P	Ball	100/125	50/60	0.38/0.37	37/39	2750/3050	54/59	240/275	1	3.3/250
G16062HA,B-C-7P		200/240	50/60	0.15/0.17	30/36	2750/3050	54/59	240/275	1	1/500
G16062HA,B-C-7P	Ball	380/420	50/60	0.08/0.09	30/35	2300/2600	50/54	220/225	3	—
G16062HA,B-C-7P		380/420	50/60	0.1	30/35	2300/2600	50/54	220/255	1	0.33/500
G16062MA,B-C-7P	Ball	100/125	50/60	0.35	35	2300/2600	50/54	220/225	1	3.3/250
G16062MA,B-C-7P		200/240	50/60	0.18	35	2300/2600	50/54	220/255	1	1/500

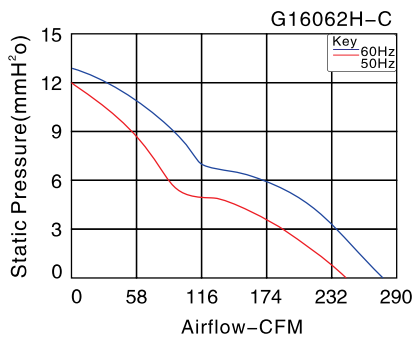

Fan Accessories



JL-160FOR