



Rev.	Description	Date
A0	New release	2019.05.05

1. PHYSICAL CHARACTERISTICS (mm)

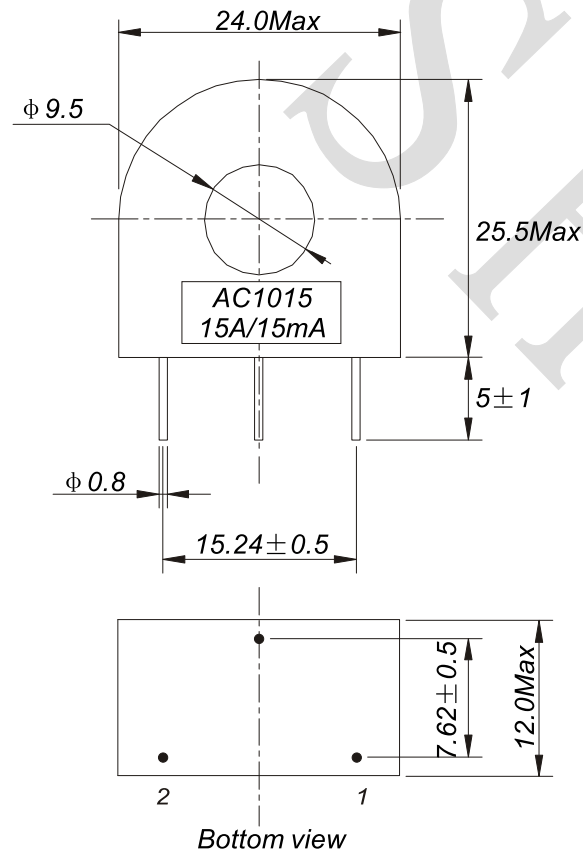

2. ELECTRONICAL SCHEMATIC

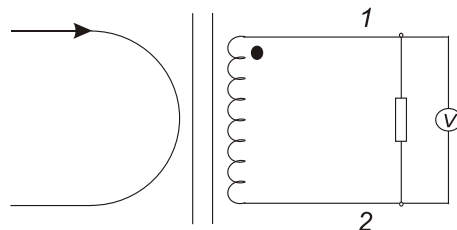

3. ELECTRONICAL SPECIFICATIONS

Turns ratio: 1000:1

Rated current: 15A

Output current: 15mA

Hi-Pot: Pri to Sec AC4KV 1mA 1Min

Inductance: 2.0H Min@100Hz, 0.1V

RDC: $41.8\Omega \pm 15\%$ @ $T=20^{\circ}\text{C}$

Operating temperature: -55°C to 130°C

4. MATERIAL LIST

NO	Materials	Specifications	Supplier
1	Shell	PC	SHANGHAIDALONG
2	Wire	2UEW	PENGTAI
3	Core	Ultramicro crystal	ZHONGTIANKELIN
4	Epoxy	9241#(A:B)	TAINJINQIAO

NAME:	Current transformer		
CUSTOMER P/N:	AC1015	DATE:	2019-05-05
SHINHOM P/N:	ACST010C-15A-15mA	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	



SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD

TEL: +86-029-87851838
FAX: +86-029-87851840
ZIP: 710054
Http://www.shinhom.com
E-mail: shinhom@globalsources.com
sales@shinhom.com.cn
NO. 8, Yanta Northern Road, Xi'an Shaanxi Pro. China